

## FLIGHT SUMMARY REPORT

**Flight Number:** 99-005-04  
**Calendar/Julian Date:** 31 May 1999 • 151  
**Sensor Package:** MASTER Airborne Simulator (MASTER)  
**Area(s) Covered:** Ferry to Albuquerque, NM

**Investigator(s):** Myers, NASA ARC

**Aircraft #:** 798  
Department of Energy  
King Air B200

### SENSOR DATA

**Accession #:** ----  
**Sensor ID #:** 124  
**Sensor Type:** MASTER  
**Focal Length:** ----  
**Film Type:** ----  
**Filtration:** ----  
**Spectral Band:** ----  
**f Stop:** ----  
**Film Speed:** ----  
**# of Frames:** ----  
**% Overlap:** ----  
**Quality:** ----  
**Remarks:**

## **Airborne Science and Applications Program**

The Airborne Science Branch at NASA's Dryden Flight Research Center, Edwards, California, operates two ER-2 high altitude aircraft in support of NASA earth science research. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and in situ data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor(s) and camera(s) used for data collection during this flight.

## **Department of Energy Remote Sensing Laboratory**

The NASA Airborne Science and Applications Program at Ames Research Center contracted with the Department of Energy Remote Sensing Laboratory (RSL) in Las Vegas, Nevada to fly the RSL Multispectral Scanner (MSS) and the NASA Thermal Infrared Multispectral Scanner (TIMS) over the desert southwest. The scanners were flown on the DOE Cessna Citation.

The Cessna Citation is a low and medium altitude, moderate speed aircraft. It can operate from 4,000 to 35,000 feet above sea level at speeds between 135 and 225 knots. There are two instrument ports in the aircraft. The RSL 1268 Multispectral Scanner was mounted over the aft port and the NASA Thermal Infrared Multispectral Scanner was mounted over the forward port.

## **MASTER (MODIS/ASTER Airborne Simulator)**

The MASTER is similar to the MAS, with the thermal bands modified to more closely match the NASA EOS ASTER (Advanced Spaceborne Thermal Emission and Reflection Radiometer) satellite instrument, which is scheduled for launch in 1998. It is intended primarily to study geologic and other Earth surface properties. Flying on

both high and low altitude aircraft, the MASTER became operational in early 1998. Its fifty spectral bands are configured as follows:

Spectral Channel	Band center (μm )	Bandwidth (μm )	Spectral Range
1	0.460	0.04	0.440-0.480
2	0.500	0.04	0.480-0.520
3	0.540	0.04	0.520-0.560
4	0.580	0.04	0.560-0.600
5	0.660	0.06	0.630-0.690
6	0.710	0.04	0.690-0.730
7	0.750	0.04	0.730-0.770
8	0.800	0.04	0.780-0.820
9	0.865	0.04	0.845-0.885
10	0.905	0.04	0.885-0.925
11	0.945	0.04	0.925-0.965
12	1.625	0.05	1.600-1.650
13	1.675	0.05	1.650-1.700
14	1.725	0.05	1.700-1.750
15	1.775	0.05	1.750-1.800
16	1.825	0.05	1.800-1.850
17	1.875	0.05	1.850-1.900
18	1.925	0.05	1.900-1.950
19	1.975	0.05	1.950-2.000
20	2.075	0.05	2.050-2.100
21	2.160	0.05	2.135-2.185
22	2.210	0.05	2.185-2.235
23	2.260	0.05	2.235-2.285
24	2.3295	0.065	2.297-2.362
25	2.3945	0.065	2.362-2.427

Spectral Channel	Band center (μm )	Bandwidth (μm )	Spectral Range
26	3.150	0.15	3.075-3.225
27	3.300	0.15	3.225-3.375
28	3.3450	0.15	3.375-3.525
29	3.600	0.15	3.525-3.675
30	3.750	0.15	3.675-3.825
31	3.900	0.15	3.825-3.975
32	4.050	0.15	3.975-4.125
33	4.200	0.15	4.125-4.275
34	4.575	0.6	4.275-4.875
35	4.500	0.15	4.425-4.575
36	4.650	0.15	4.575-4.725
37	4.800	0.15	4.725-4.875
38	4.950	0.15	4.875-5.025
39	5.100	0.15	5.025-5.175
40	5.250	0.15	5.175-5.325
41	7.900	0.4	7.70-8.10
42	8.300	0.4	8.10-8.50
43	8.700	0.4	8.50-8.90
44	9.100	0.4	8.90-9.30
45	9.700	0.4	9.50-9.90
46	10.100	0.4	9.90-10.30
47	10.625	0.65	10.30-10.95
48	11.300	0.7	10.95-11.65
49	12.050	0.5	11.80-12.30
50	12.750	0.5	12.50-13.00

Sensor/Aircraft Parameters:

Spectral Bands: 50 (16-bit resolution)  
 IFOV: 2.5 mrad  
 Swath width: 19.9 nmi (36 km) at 65,000 ft  
 Ground Resolution: 12-50 meters (variable w/ altitude)  
 Total FOV: 85.92 degrees  
 Pixels/Scanline: 716  
 Scan Rate: 6.25 - 25 Hz


(See the homepage at [asterweb.jpl.nasa.gov](http://asterweb.jpl.nasa.gov))

Information on data tape format, logical record format, and scanner calibration data may be obtained from the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: 650-604-6252).

MODIS/ASTER AIRBORNE SIMULATOR (MASTER) FLIGHT LINE INFORMATION FOR 31-MAY-1999  
 NASA FLIGHT NUMBER 99-005-04

FILE	SITE	LINE	RUN	START OF FLIGHT LINE			END OF FLIGHT LINE			FLIGHT DATA				
				TIME HH:MM:SS	LAT DEG	LON DEG	TIME HH:MM:SS	LAT DEG	LON DEG	SCAN LINES	SOLAR ZEN AZIM		HEAD DEG	ALT M (GPS)
1	000	1	1	19:12:13	35.985	-114.807	19:20:57	35.942	-114.191	6512	14.6	162.5	98.29	6421
2	000	1	1	19:20:58	35.943	-114.181	19:29:41	35.889	-113.388	6428	14.1	173.1	96.70	7247
3	000	1	1	19:29:43	35.888	-113.386	19:38:22	35.826	-112.568	6395	14.0	184.5	97.39	7249
4	000	2	1	19:39:41	35.815	-112.439	19:43:32	35.785	-112.069	2871	14.2	194.4	97.94	7268
5	000	2	1	19:43:34	35.785	-112.065	19:52:17	35.712	-111.217	6483	14.8	202.2	98.47	7253
6	000	2	1	19:52:19	35.711	-111.218	20:01:03	35.629	-110.345	6512	15.8	212.2	99.21	7254
7	000	2	1	20:01:04	35.628	-110.339	20:07:21	35.565	-109.706	4697	17.0	219.8	99.78	7255
8	000	2	1	20:07:23	35.565	-109.706	20:16:07	35.469	-108.824	6485	18.4	226.4	101.23	7259
9	000	2	1	20:16:08	35.462	-108.823	20:24:52	35.288	-107.970	6485	20.3	233.0	109.55	7252
10	000	2	1	20:24:53	35.281	-107.945	20:33:29	35.109	-107.116	6413	22.2	238.8	108.47	5617

NUMBER OF FILES FOR THIS FLIGHT = 10  
 TOTAL NUMBER OF SCAN LINES = 59281  
 DATE THESE FILES WERE PROCESSED = 09-Aug-99  
 DATE THIS LIST WAS CREATED = 10-Aug-99  
 GRANULE VERSION = 9

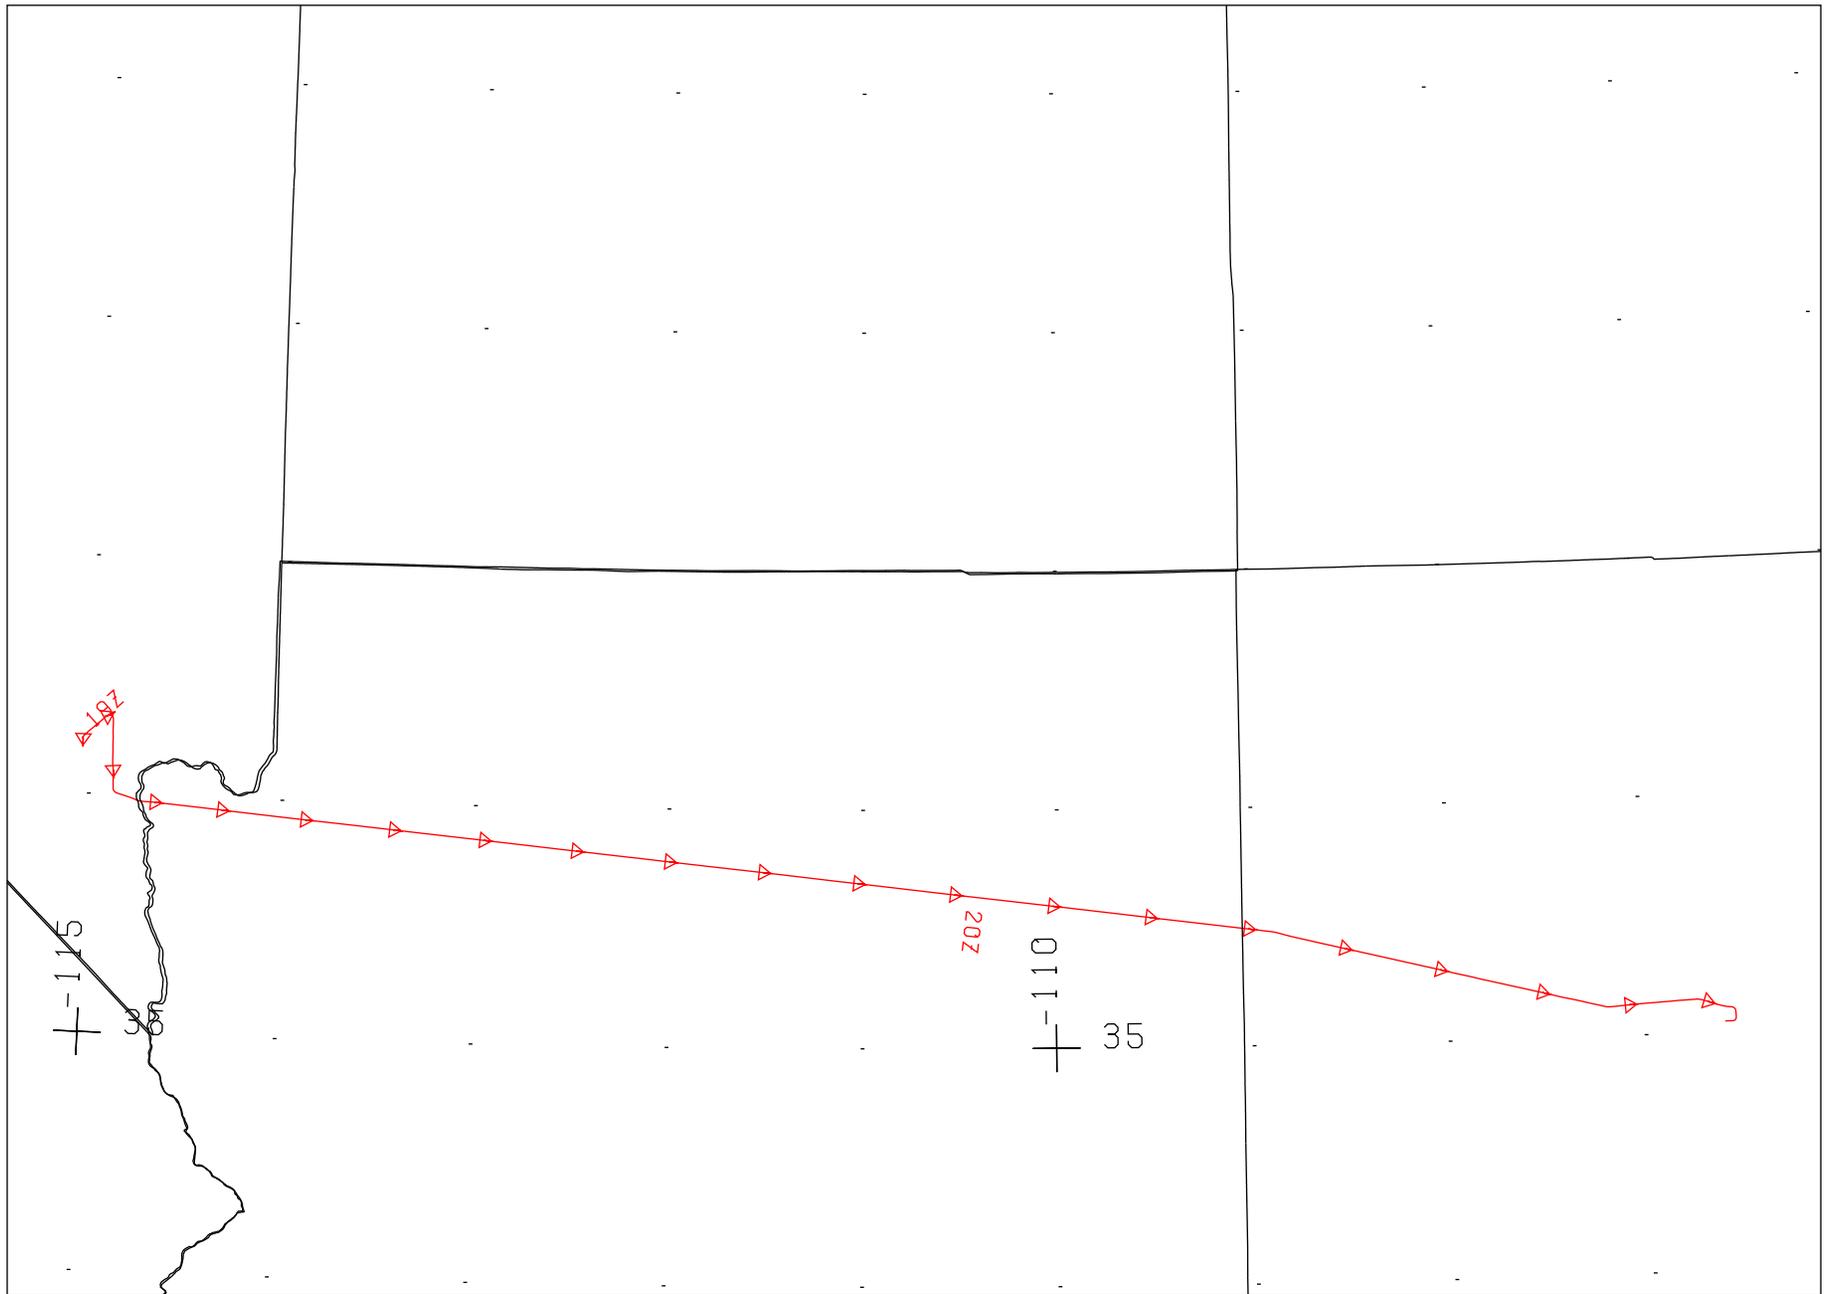

FLIGHT 99-005-04

31 MAY 1999

A/C 798

(DOE B200)

MASTER