

FLIGHT SUMMARY REPORT

Flight #: 90-049
Date: 19 February 1990
Sensor Package: Airborne Visible and Infrared Imaging Spectrometer (AVIRIS)
Thermal Infrared Multispectral Scanner (TIMS)
Wild-Heerbrug RC-10
Area(s) Covered: California and Nevada

Investigator(s): Vane, Jet Propulsion Laboratory

Aircraft #: 709

Flight Request: 90E207B

Julian Date: 050

SENSOR DATA

Accession #:	----	----	03997
Sensor ID #:	099	086	026
Sensor Type:	AVIRIS	TIMS	RC-10
Focal Length:	----	----	12" 304.97 mm
Film Type:	----	----	High Definition Aerochrome IR SO-131
Filtration:	----	----	cc .20B
Spectral Band:	----	----	510-900 nm
f Stop:	----	----	4
Shutter Speed:	----	----	1/200
# of Frames:	----	----	32
% Overlap:	----	----	60
Quality:	----	----	Excellent
Remarks:			

Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and *in situ* data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor used for data collection during this flight.

Airborne Visible and Infrared Imaging Spectrometer

The Airborne Visible and Infrared Imaging Spectrometer (AVIRIS) is the second in the series of imaging spectrometer instruments developed at the Jet Propulsion Laboratory (JPL) for earth remote sensing. This instrument uses scanning optics and a four-line arrays of detectors to image a 614 pixel swath simultaneously in 224 contiguous spectral bands (0.4-2.4 μm).

AVIRIS parameters are as follows:

IFOV:	1 mrad
GIFOV (at 20 km):	20 m
FOV:	30°
GFOV (at 20 km):	11 km
Spectral Coverage:	0.41 - 2.45 μm
Number of Spectral Bands:	224
Digitization:	10 Bits
Data Rate:	17 MBPS

<u>Spectrometer</u>	<u>Wavelength Range</u>	<u>Number of Bands</u>	<u>Sampling Interval</u>
1	0.41 - 0.70 μm	31	9.4 nm
2	0.68 - 1.27 μm	63	9.4 nm
3	1.25 - 1.86 μm	63	9.7 nm
4	1.84 - 2.45 μm	63	9.7 nm

All AVIRIS data is decommutated and archived at JPL and not currently available for public distribution. For further information contact Rob Greene at Jet Propulsion Laboratory, 4800 Oak Grove Drive, Mail Stop 11-116, Pasadena, California 91109-8099.

Thermal Infrared Multispectral Scanner

The Thermal Infrared Multispectral Scanner (TIMS) is a multispectral scanning system using a dispersive grating and a six element mercury cadmium telluride detector array to produce six discrete channels in the 8.2 μm to 12.2 μm region.

<u>Channel</u>	<u>Wavelength, μm</u>	<u>NET</u>
1	8.2 - 8.6	< 0.3 ^o C
2	8.6 - 9.0	< 0.3 ^o C
3	9.0 - 9.4	< 0.3 ^o C
4	9.4 - 10.2	< 0.3 ^o C
5	10.2 - 11.2	< 0.3 ^o C
6	11.2 - 12.2	< 0.3 ^o C

Sensor/aircraft parameters are as follows:

IFOV:	2.5 mrad
Ground Resolution:	163 feet (50 meters) at 65,000 feet
Total Scan Angle:	76.56 ^o
Swath Width:	16.9 nmi (31.3 km)
Pixels/Scan Line:	638
Scan Rate:	7.3 (scans/second)
Ground Speed:	400 kts. (206 m/second)

NOTE: Information on data tape format, logical record format, and scanner calibration data may be obtained from the NASA-Ames Aircraft Data Facility at (415) 604-6252 or FTS 464-6252.

**CAMERA FLIGHT LINE DATA
FLIGHT NO. 90-049**

Accession # 03997

Sensor # 026

Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
A - B	0226-0236	19:42:25	19:46:44	65000/19800	10% minor cumulus (frames 0233-0236)
C - D	0259-0267	21:21:35	21:24:50	"	10-40% cirro cumulus (frames 0259-0267)
E - F	0268-0274	21:48:26	21:50:46	"	Clear
G - H	0275-0279	22:32:21	22:33:47	"	Clear

TIMS SCANNER FLIGHT LINE DATA


FLIGHT NO. 90-049

TIMS FLIGHT DATA

FLIGHT NUMBER: 90-049

Check Points	Actual* Time (GMT)		Actual Scanline		Altitude feet/meter	Scan Speed (rps)	Total Good Scanlines	Total Interpolated Scanlines	Total Repeated Scanlines
	Begin	End	Begin	End					
A-B	19:42:25	19:46:44	17898	19784	65000/19812	7.3	1887	---	---
C-D	21:21:35	21:24:50	61393	62886	65000/19812	7.3	1494	---	---
E-F	21:48:26	21:50:46	73166	74194	65000/19812	7.3	1029	---	---
G-H	22:32:21	22:33:47	92434	93071	65000/19812	7.3	638	---	---

*TIME DERIVED FROM PHOTO DATA; TIMS HOUSEKEEPING DATA DISPLAYS ZERO'S FOR TIME CODE.

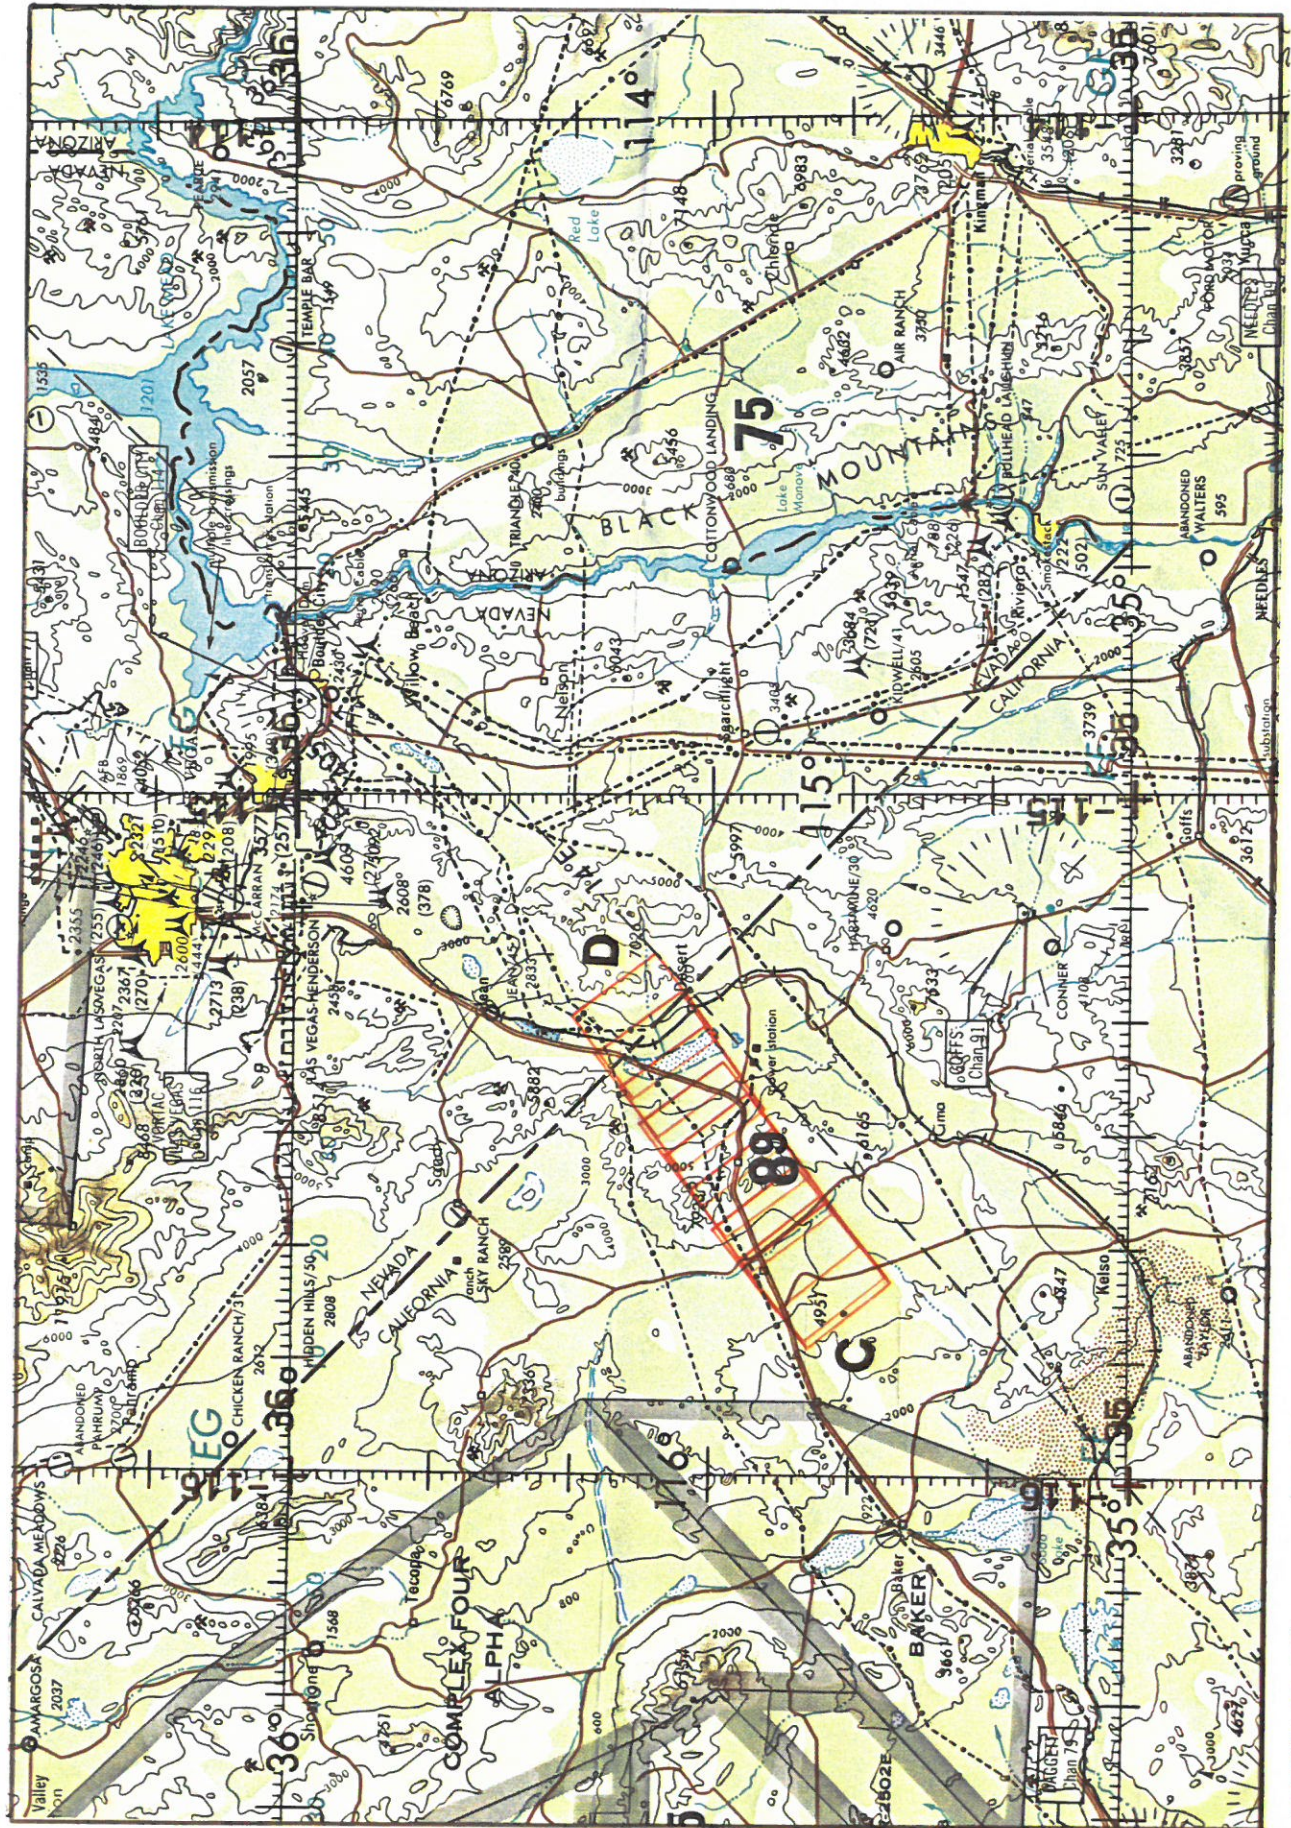

FLIGHT 90-049 19 February 1990 A/C 709 AVIRIS / TINS / RC-10 Accession # 03997 ONC 6-18

