

# FLIGHT SUMMARY REPORT

**Flight #:** 92-065  
**Date:** 25 February 1992  
**Sensor Package:** Stormfest Instrument Package  
 Wild-Heerbrug RC-10  
 Modis-N Airborne Simulator (MAS)  
 Advanced Microwave Precipitation Radiometer (AMPR)  
 Lightning Instrument Package (LIP)  
 Microwave Thermal Sampler (MTS)  
 High-Resolution Interferometer Sounder (HIS)

**Area(s) Covered:** Kansas, Nebraska, Oklahoma, Texas

**Investigator(s):** Heymsfield, NASA-GSFC                      **Aircraft #:** 706  
**Flight Request:** 2P22029                                              **Julian Date:** 056

## SENSOR DATA

<b>Accession #:</b>	04384	-----	-----	-----	-----	-----
<b>Sensor ID #:</b>	036	108	105	106	110	083
<b>Sensor Type:</b>	RC-10	MAS	AMPR	LIP	MTS	HIS
<b>Focal Length:</b>	6" 153.19 mm	-----	-----	-----	-----	-----
<b>Film Type:</b>	Panatomic-X Aerographic II 2412	-----	-----	-----	-----	-----
<b>Filtration:</b>	2.2 AV + Wratten 12	-----	-----	-----	-----	-----
<b>Spectral Band:</b>	510-700 nm	-----	-----	-----	-----	-----
<b>f Stop:</b>	5.6	-----	-----	-----	-----	-----
<b>Shutter Speed:</b>	1/300	-----	-----	-----	-----	-----
<b># of Frames:</b>	244	-----	-----	-----	-----	-----
<b>% Overlap:</b>	60	-----	-----	-----	-----	-----
<b>Quality:</b>	Excellent	Good	-----	-----	-----	-----
<b>Remarks:</b>						

## Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and *in situ* data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensors and camera system(s) used for data collection during this flight.

## Modis-N Airborne Simulator

The Modis-N Airborne Simulator (MAS) is a modified Daedalus multispectral scanner. It records up to 12 8-bit channels, which can be selected from an array of 50 available spectral bands. The band selection is made prior to flight and the instrument is hard-wired to that configuration. Channel one can be used to store additional bits which provide 10-bit resolution for channels 9 through 12. The band configuration for the Stormfest deployment is as follows:

<u>Channel</u>	<u>Band edges <math>\mu\text{m}</math></u>
1	-----
2	0.675 - 0.685
3	1.605 - 1.655
4	1.955 - 2.005
5	3.675 - 3.825
6	4.325 - 4.575
7	4.575 - 4.725
8	9.000 - 9.400
9*	9.400 - 9.800
10*	9.800 - 10.200
11*	10.700 - 11.200
12*	12.200 - 12.700

\* 10-bit resolution

### Sensor/Aircraft Parameters:

Spectral Channels:	50
Output Channels:	7 8-bit and 4 10-bit
IFOV:	0.5 mrad
Ground Resolution:	163 feet (50 meters at 65,000 feet)
Total Scan Angle:	85.92°

Pixels/Scan Line:	716
Scan Rate:	6.25 scans/second
Ground Speed:	400 kts (206 m/second)
Roll Correction:	Plus or minus 3.5 degrees (approx.)

### Advanced Microwave Precipitation Radiometer

The Advanced Microwave Precipitation Radiometer (AMPR) is a scanning passive microwave radiometer operating at frequencies of 10, 19, 37, and 85 GHz. The AMPR is configured to fit into the Q-bay of the ER-2 and scans cross-track +/- 45° to the left and right of nadir. The instrument's principle use is for gathering microwave image data of cloud water and precipitation primarily over the ocean. Some data collected also will be used for studies of vegetation, ground moisture, sea surface state, and snow cover. The AMPR is sponsored by Dr. Roy W. Spencer, NASA-MSFC, ES43, Huntsville, Alabama 35812, FTS 824-1686.

### Lightning Instrument Package

The Lightning Instrument Package (LIP) comprises a set of optical and electrical sensors with a wide range of temporal, spatial, and spectral resolution to observe lightning and investigate electrical environments within and above thunderstorms. The instruments provide measurements of the air conductivity and vertical electric field above thunderstorms and provide estimates of the storm electric currents. In addition, LIP will detect total storm lightning and differentiate between intracloud and cloud-to-ground discharges. This data will be used in studies of lightning/storm structure and lightning precipitation relationships. The LIP is sponsored by Dr. Richard Blakeslee, NASA-MSFC, ES43, Huntsville, Alabama 35812, FTS 824-1651.

### MIT Millimeter-wave Temperature Sounder

The Millimeter-wave Temperature Sounder (MTS) is a dual-band microwave radiometer system for the measurement of atmospheric temperature and other phenomena affecting transmission in the microwave absorption bands of molecular oxygen. MTS data has been used to produce images of temperature and precipitation structure, to infer precipitation cell top altitudes and to detect atmospheric waves.

The instrument is capable of either downward- or upward-viewing operation on the ER-2 as well as ground-based operation. One radiometer is an eight channel scanning spectrometer with its radiometer centered on the 118,75 GHz oxygen line. The second radiometer is a single-channel (Ch. 0) nadir (or zenith) viewing system with its local oscillator tunable under computer control from 52 th 54 GHz. Characteristics of the two radiometers are as follows:

Channel	Center freq. (MHz)	Width (MHz)
	<u>Single Channel Radiometer</u>	
0	115	170
	<u>Eight Channel Radiometer</u>	
1	660	170
2	840	210
3	1040	240
4	1260	220

5	1470	240
6	1670	220
7	1900	270
8	500	125

For further information contact Michael Schwarz, Massachusetts Institute of Technology, MIT-RLE Mail Stop 26-357, 77 Massachusetts Ave., Cambridge, MA 02139.

### High-Resolution Interferometer Sounder

The High-Resolution Interferometer Sounder (HIS) measures upwelling infrared spectral radiance at the aircraft altitude with high absolute accuracy using a passive Michelson interferometer and precision onboard blackbody calibration sources. The instrument has a single nadir staring field of view with observed spectra obtained every six seconds. The spectra cover the range 16.6 microns to 3.3 microns with a spectral resolution of 0.3 to 0.5  $\text{cm}^{-1}$ . The primary use of the instrument is as an atmospheric sounder of temperature and water vapor. The spectra also contain important information on trace gases and surface properties. The HIS was developed by the University of Wisconsin at Madison and is a prototype instrument for advanced infrared satellite sounders.

### Camera Systems

Various camera systems and films are used for photographic data collection. Film types include high definition color infrared, natural color, and black and white emulsions. Available photographic systems are as follows:

- Wild-Heerbrug RC-10 metric mapping camera
  - 9 x 9 inch film format
  - 6 inch focal length lens provides area coverage of 16 x 16 nautical miles from 65,000 feet
  - 12 inch focal length lens provides area coverage of 8 x 8 nautical miles from 65,000 feet
- Hycon HR-732 large scale mapping camera
  - 9 x 18 inch film format
  - 24 inch focal length lens provides area coverage of 4 x 8 nautical miles from 65,000 feet
- IRIS II Panoramic camera
  - 4.5 x 34.7 inch film format
  - 24 inch focal length lens
  - 90 degree field of view provides area coverage of 2 x 21.4 nautical miles from 65,000 feet

The U.S. Geological Survey's EROS Data Center at Sioux Falls, South Dakota serves as the archive and product distribution facility for NASA-Ames aircraft acquired photographic and digital imagery. For information regarding photography and digital data (including areas of coverage, products, and product costs) contact EROS Data Center, Customer Services, Sioux Falls, South Dakota 57198 (Telephone: (605) 594-6151).

Additional information regarding ER-2 acquired photographic and digital data is available through the Aircraft Data Facility at Ames Research Center. For specific information regarding flight documentation, sensor parameters, and areas of coverage contact the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: (415) 604-6252).

**CAMERA FLIGHT LINE DATA  
FLIGHT NO. 92-065**

Accession # 04384

Sensor # 036

Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
A - B	0420-0457	20:06:59	20:41:28	65000/19800	100% strato-cumulus (frames 0420-0427); 10-80% cumulus (frames 0449-0457)
---	0458-0462	20:42:24	20:46:08	"	80-100% cumulus; oblique frames in turn
B - A	0463-0503	20:47:04	21:23:49	"	10-100% cumulus (frames 0463-0474)
---	0504-0505	21:24:27	21:25:23	"	Clear; oblique frames in turn
A - C	0506-0512	21:26:19	21:31:55	"	Clear
---	0513-0514	21:32:51	21:33:47	"	Clear; oblique frames in turn
C - D	0515-0537	21:34:43	21:55:14	"	Clear
---	0538-0541	21:57:06	21:58:58	"	Clear; oblique frames in turn
D - E	0542-0622	21:59:55	23:14:32	"	10-20% cumulus (frames 0585-0588)
---	0623-0624	23:15:28	23:16:24	"	Clear; oblique frames in turn
E - F	0625-0663	23:17:19	23:52:39	"	30-100% cumulus (frames 0648-0663)


# MAS SCANNER FLIGHT LINE DATA

## FLIGHT NO. 92-065

3  
7


DAEDALUS FLIGHT DATA  
FLIGHT NUMBER: 92-065

Check Points	A c t u a l t i m e b e g i n	(GMT) e n d	A c t u a l s c a n l i n e b e g i n	e n d	A l t i t u d e f e e t / m e t e r	S c a n S p e e d (r p s)	t o t a l G o o d s c a n l i n e s	t o t a l I n t e r p o l a t e d s c a n l i n e s	t o t a l R e p e a t e d s c a n l i n e s
A-B	20:04:43.0	20:41:27.0	49095	62811	65000/19812	6.25	13701	0	16
B-A	20:47:21.0	21:23:50.0	65011	78631	65000/19812	6.25	13601	1	19
A-C	21:26:15.0	21:32:40.0	79533	81933	65000/19812	6.25	2401	0	0
C-D	21:35:54.0	21:56:1.0	83139	90645	65000/19812	6.25	7501	0	6
D-d	22:01:7.0	22:20:56.0	92549	99953	65000/19812	6.25	7401	0	4
d-e	22:23:5.0	23:03:4.0	100753	115681	65000/19812	6.25	14901	0	28
e-f	23:03:4.0	23:15:24.0	115682	120287	65000/19812	6.25	4600	0	6
E-F	23:17:17.0	23:51:12.0	120987	133655	65000/19812	6.25	12590	20	59

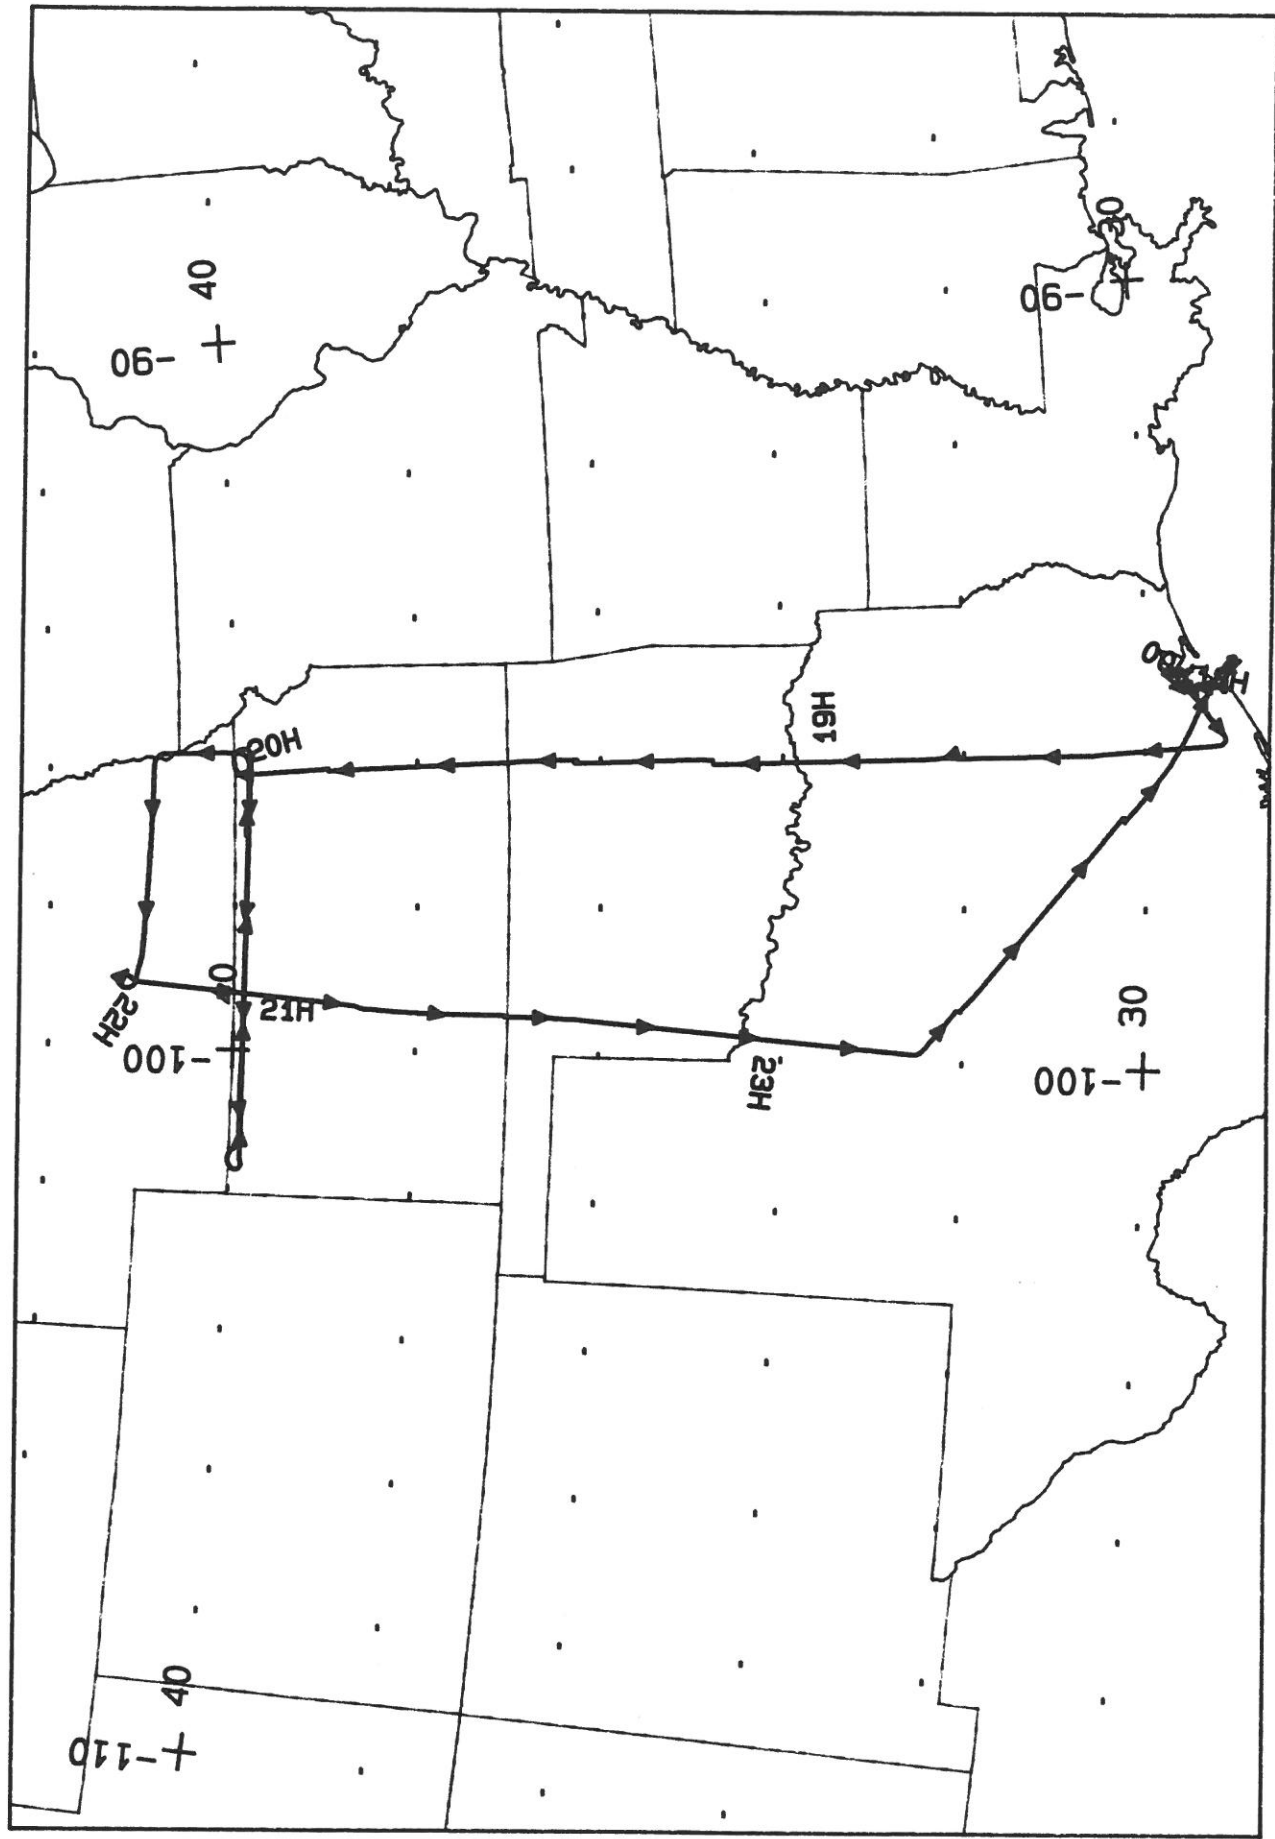

FLIGHT 92-065      25 February 1992      A/C 706      STORMFEST Flight      Ellington Deployment



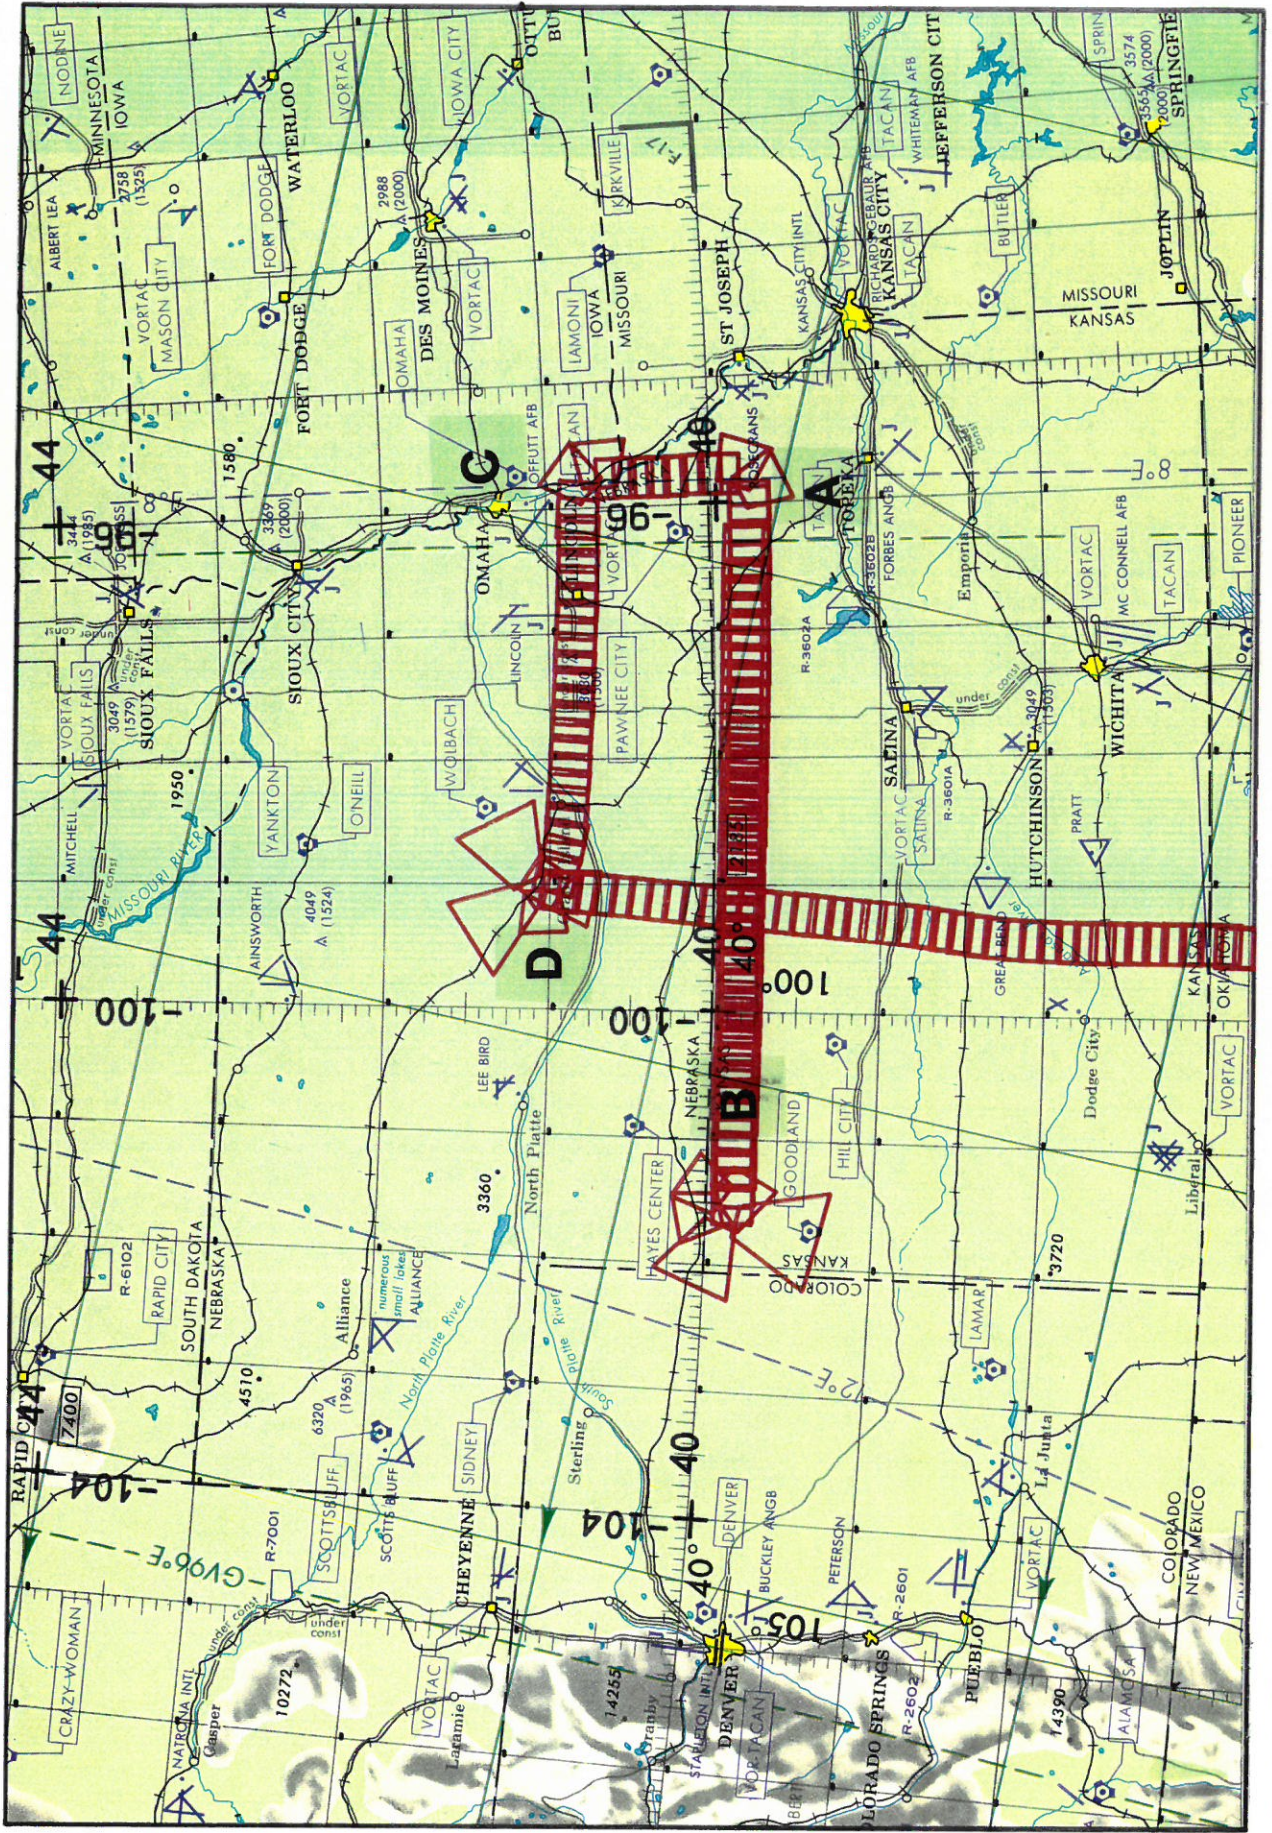

FLIGHT 92-065

25 February 1992


A/C 706

RC-10 (2412)

Accession # 04984

GNC 2



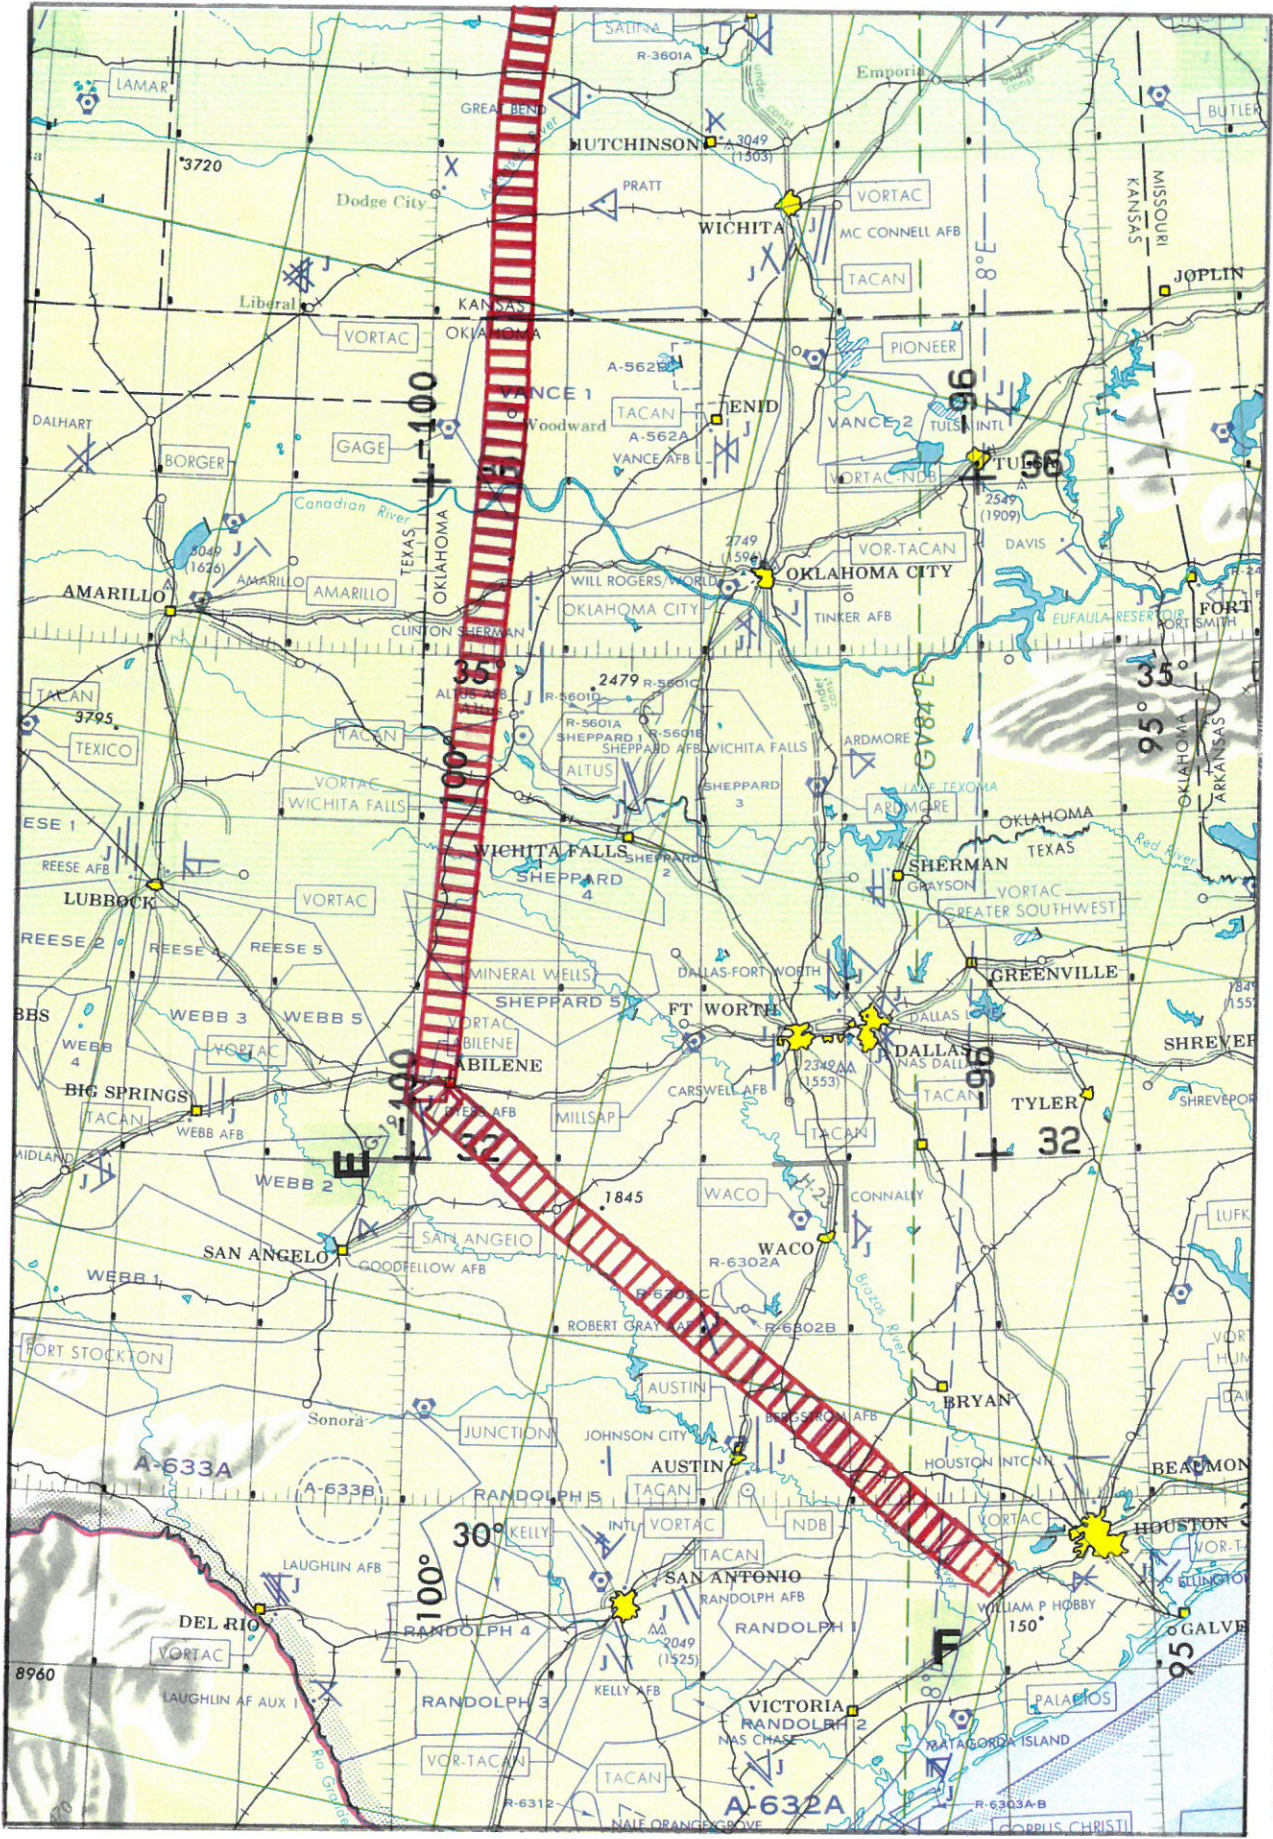

FLIGHT 92-065  
25 February 1992  
A/C 706  
RC-10 (2412)  
Accession # 04984  
GNC 2