

FLIGHT SUMMARY REPORT

Flight #: 92-118
Date: 08 July 1992
Sensor Package: Airborne Visible and Infrared Imaging Spectrometer (AVIRIS)
Thematic Mapper Simulator (TMS)
Area(s) Covered: Florida

Investigator(s): Peterson, NASA-ARC
Flight Request: 2P32035

Aircraft #: 708
Julian Date: 190

SENSOR DATA

Accession #:	-----	-----
Sensor ID #:	099	074
Sensor Type:	AVIRIS	TMS
Focal Length:	-----	-----
Film Type:	-----	-----
Filtration:	-----	-----
Spectral Band:	-----	-----
f Stop:	-----	-----
Shutter Speed:	-----	-----
# of Frames:	-----	-----
% Overlap:	-----	-----
Quality:	-----	Good
Remarks:		

Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and *in situ* data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensors used for data collection during this flight.

Airborne Visible and Infrared Imaging Spectrometer

The Airborne Visible and Infrared Imaging Spectrometer (AVIRIS) is the second in the series of imaging spectrometer instruments developed at the Jet Propulsion Laboratory (JPL) for earth remote sensing. This instrument uses scanning optics and four spectrometers to image a 614 pixel swath simultaneously in 224 contiguous spectral bands (0.4-2.4 μm).

AVIRIS parameters are as follows:

IFOV:	1 mrad
Ground Resolution:	66 feet (20 meters) at 65,000 feet
Total Scan Angle:	30°
Swath Width:	5.7 nmi (10.6 km) at 65,000 feet
Spectral Coverage:	0.41-2.45 μm
Pixels/Scan Line:	614
Number of Spectral Bands:	224
Digitization:	10-bits
Data Rate:	17 MBPS

<u>Spectrometer</u>	<u>Wavelength Range</u>	<u>Number of Bands</u>	<u>Sampling Interval</u>
1	0.41 - 0.70 μm	31	9.4 nm
2	0.68 - 1.27 μm	63	9.4 nm
3	1.25 - 1.86 μm	63	9.7 nm
4	1.84 - 2.45 μm	63	9.7 nm

All AVIRIS data is decommutated and archived at JPL and not currently available for public distribution. For further information contact Rob Green at Jet Propulsion Laboratory, 4800 Oak Grove Drive, Mail Stop 183-501, Pasadena, California 91109-8099.

Thematic Mapper Simulator

The Daedalus Thematic Mapper Simulator (TMS) is a multispectral scanner flown aboard the ER-2 aircraft which simulates spatial and spectral characteristics of the seven Landsat-D Thematic Mapper bands. The specific bands are as follows:

<u>Daedalus Channel</u>	<u>TM Band</u>	<u>Wavelength, μm</u>
1	A	0.42 - 0.45
2	1	0.45 - 0.52
3	2	0.52 - 0.60
4	B	0.60 - 0.62
5	3	0.63 - 0.69
6	C	0.69 - 0.75
7	4	0.76 - 0.90
8	D	0.91 - 1.05
9	5	1.55 - 1.75
10	7	2.08 - 2.35
11	6	8.5 - 14.0 low gain
12	6	8.5 - 14.0 high gain

Sensor/aircraft parameters are as follows:

IFOV:	1.25 mrad
Ground Resolution:	81 feet (25 meters) at 65,000 feet
Total Scan Angle:	43°
Swath Width:	8.4 nmi (15.6 km) at 65,000 feet
Pixels/Scan Line:	716
Scan Rate:	12.5 scans/second
Ground Speed:	400 kts (206 m/second)


NOTE: Information on data tape format, logical record format, and scanner calibration data may be obtained from the NASA-Ames Aircraft Data Facility at (415) 604-6252 or FTS 464-6252.

TMS SCANNER FLIGHT LINE DATA

FLIGHT NO. 92-118

DAEDALUS FLIGHT DATA
 FLIGHT NUMBER: 92-118

Check Points	A c t u a l t i m e b e g i n e n d	A c t u a l s c a n l i n e b e g i n e n d	A l t i t u d e f e e t / m e t e r	S c a n S p a c e d (r p s)	t o t a l G o o d s c a n l i n e s	t o t a l I n t e r p o l a t e d s c a n l i n e s	t o t a l R e p e a t e d s c a n l i n e s
A-B	13:38:13.0 14:03:3.0	74710 78335	65000/19812	12.50	3611	0	15
C-D	14:19:55.0 14:27:25.0	90985 96609	65000/19812	12.50	5577	0	28
C-D	14:39:39.0 14:44:8.0	105034 107146	65000/19812	12.50	4098	0	15
C-D	14:56:31.0 15:01:3.0	118433 121833	65000/19812	12.50	3399	0	2
C-D	15:12:33.0 15:17:50.0	130433 134170	65000/19812	12.50	3677	0	16

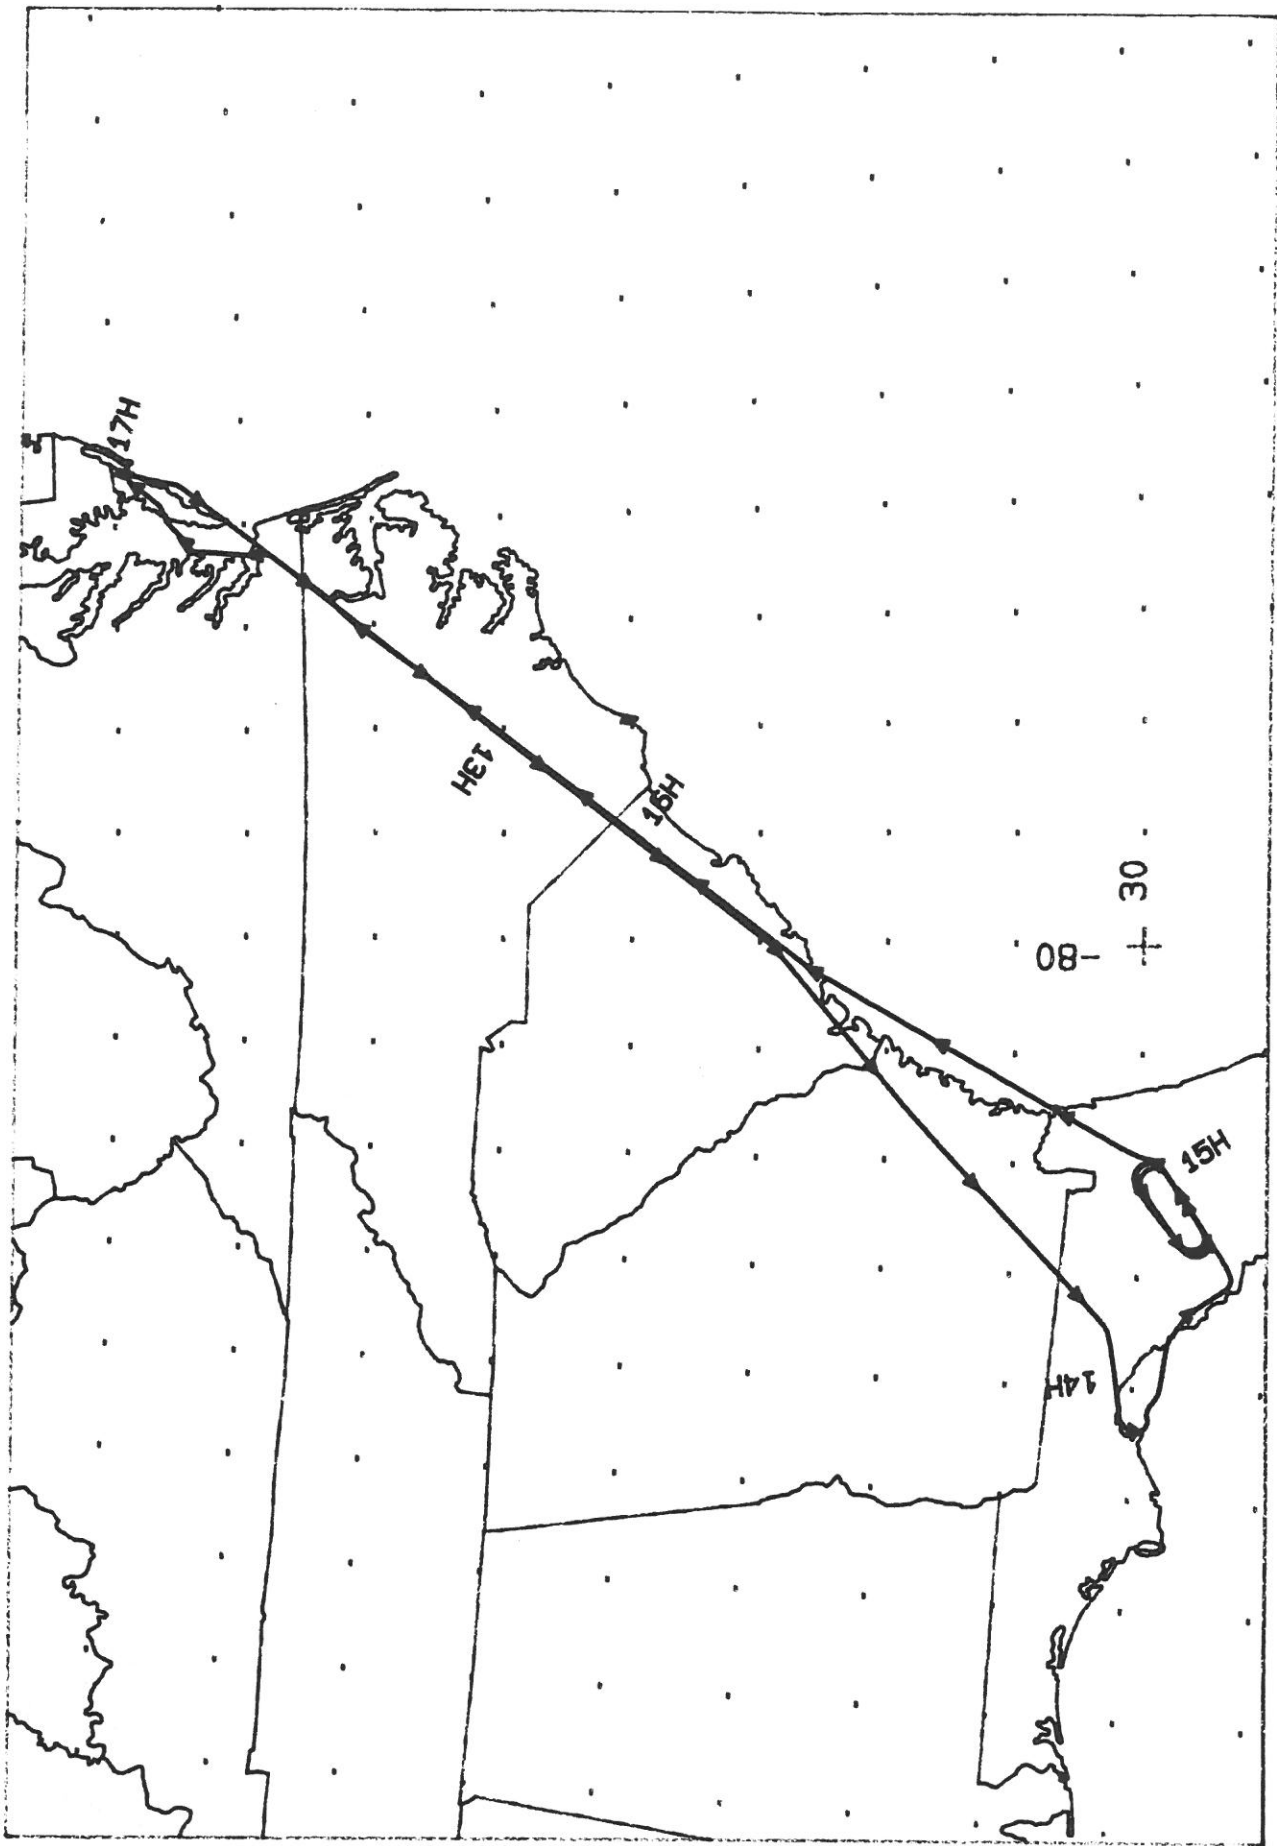

AVIRIS / TMS / RC-10

A/C 708

6 JULY 1992

FLIGHT 92-118



FLIGHT 92-118

6 July 1992

A/C 709

Thematic Mapper Simulator (TMS)

ONC H-25