FLIGHT SUMMARY REPORT

Flight Number:

93-138

Calendar/Julian Date: 16 July 1993 • 197

Sensor Package:

Wild-Heerbrug RC-10 Airborne Visible and Infrared Imaging

Spectrometer (AVIRIS)
Modis Airborne Simulator (MAS)

Area(s) Covered:

Mid-Atlantic States

Investigator(s): Kaufman, NASA-GSFC

Aircraft #: 708

SENSOR DATA

Accession #: 04595 Sensor ID #: 034 099 108 Sensor Type: **RC-10 AVIRIS MAS** Focal Length: 12" 304.66 mm Film Type: **High Definition** Aerochrome IR SO-131 Filtration: cc.10B Spectral Band: 510-900 nm f Stop: 4 Shutter Speed: 1/150 # of Frames: 131 % Overlap: 60 Quality: Excellent Good

Remarks:

Camera clock offset 56.0 seconds from

navigation data

Data offset 1hour

1 minute and 4 seconds from navigation data

Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and in situ data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor(s) and camera(s) used for data collection during this flight.

Airborne Visible and Infrared Imaging Spectrometer

The Airborne Visible and Infrared Imaging Spectrometer (AVIRIS) is the second in the series of imaging spectrometer instruments developed at the Jet Propulsion Laboratory (JPL) for earth remote sensing. This instrument uses scanning optics and four spectrometers to image a 614 pixel swath simultaneously in 224 contiguous spectral bands (0.4-2.4 mm).

AVIRIS parameters are as follows:

IFOV:	1 mrad
Ground Resolution:	66 feet (20 meters) at 65,000 feet
Total Scan Angle:	300
Swath Width:	5.7 nmi (10.6 km) at 65,000 feet
Spectral Coverage:	0.41-2.45 mm
Pixels/Scan Line:	614
Number of Spectral Bands:	224
Digitization:	10-bits
Data Rate:	17 MBPS

	Wavelength	Number of	Sampling		
Spectrometer	Range	<u>Bands</u>	Interval		
1	0.41 - 0.70 mm	31	9.4 nm		
2	0.68 - 1.27 mm	63	9.4 nm		
-3	1.25 - 1.86 mm	63	9.7 nm		
4	1.84 - 2.45 mm	63	9.7 nm		

All AVIRIS data is decommutated and archived at JPL and not currently available for public distribution. For further information contact Rob Green at Jet Propulsion Laboratory, 4800 Oak Grove Drive, Mail Stop 183-501, Pasadena, California 91109-8099.

Modis Airborne Simulator

The Modis Airborne Simulator (MAS) is a modified Daedalus multispectral scanner. It records up to twelve 8-bit channels, which can be selected from an array of fifty available spectral bands. The band selection is made prior to flight and the instrument is hard-wired to that configuration. Channel 1 is used to store additional bits which provide 10-bit resolution for channels 9 through 12. The following MAS band combination (configuration SCARP1) was used on this flight for Smoke, Cloud, and Radiation (SCAR) experiments:

Data System Channel 1	MAS Channel	Band edges um
2 3 4	1 2	0.529 - 0.572 0.635 - 0.688
5	9 15	0.852 - 0.893 0.926 - 0.969 1.855 - 1.905
7 8	20 31	1.855 - 1.905 2.126 - 2.173 3.659 - 3.810
9* 10* 11*	42 45	8.342 - 8.738 10.791 - 11.239
12*	48 46	13.023 - 13.375 11.799 - 12.246

^{* 10-}bit resolution

Sensor/Aircraft Parameters:

Spectral Channels.

-pooled Changes.	70
Output Channels:	Seven 8-bit and four 10-bit
IFOV:	2.5 mrad
Ground Resolution:	163 feet (50 meters at 65,000 feet)
Total Scan Angle:	85,920
Pixels/Scan Line:	716
Scan Rate:	6.25

50

Scan Rate: 6.25 scans/second
Ground Speed: 400 kts (206 m/second)

Roll Correction: Plus or minus 3.5 degrees (approx.)

Camera Systems

Various camera systems and films are used for photographic data collection. Film types include high definition color infrared, natural color, and black and white emulsions. Available photographic systems are as follows:

- Wild-Heerbrug RC-10 metric mapping camera
 - 9 x 9 inch film format
 - 6 inch focal length lens provides area coverage of 16 x 16 nautical miles from 65,000 feet
 - 12 inch focal length lens provides area coverage of 8 x 8 nautical miles from 65,000 feet

• Hycon HR-732 large scale mapping camera

- 9 x 18 inch film format

- 24 inch focal length lens provides area coverage of 4 x 8 nautical miles from 65,000 feet
- IRIS II Panoramic camera
 - 4.5 x 34.7 inch film format

- 24 inch focal length lens

- 90 degree field of view provides area coverage of 2 x 21.4 nautical miles from 65,000 feet

The U.S. Geological Survey's EROS Data Center at Sioux Falls, South Dakota serves as the archive and product distribution facility for NASA-Ames aircraft acquired photographic and digital imagery. For information regarding photography and digital data (including areas of coverage, products, and product costs) contact EROS Data Center, Customer Services, Sioux Falls, South Dakota 57198 (Telephone: 605-594-6151).

Additional information regarding ER-2 acquired photographic and digital data is available through the Aircraft Data Facility at Ames Research Center. For specific information regarding flight documentation, sensor parameters, and areas of coverage contact the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: 415-604-6252).

CAMERA FLIGHT LINE DATA FLIGHT NO. 93-138

Accession # 04595


Sensor # 034

					84
Check Points	Frame Numbers	Time (GMT- START	MT-hr, min, sec) END	Altitude, MSL feet/meters	Cloud Cover/Bonned.
A . B	9271-9299	15:04:37	15:18:01	65000/19800	Minor 409 900 100 100 100 100 100 100 100 100 1
					9286); 10-30% scattered cumulus (frames 9284-9296); 10-30% scattered cumulus (frames 9290-9297)
C-D	9300-9310	15:21:29	15:26:15	8	10-20% scattered cumulus (frames 9302- 9310)
Щ Г	9311-9321	15:30:55	15:35:40		10% cumulus (frames 9311-9315)
H-0	9322-9334	15:55:09	16:00:48	*	10% cumulus (frames 9333-9334)
٦ - ١	9335-9345	16:04:09	16:08:52		10% cumulus (frames 9335-9339)
K - L	9346-9360	16:48:54	16:54:02	k	
Z -	9361-9372	17:00:10	17:04:49	a :	Clear
O G	9373-9399	17:16:09	17:26:51	*	Clear
O	9400-9401	17:49:08	17:49:36		Clear

MAS SCANNER FLIGHT LINE DATA FLIGHT NO. 93-138

F DATA	α
⋖	Ç
_	Ξ
~	4
ш	2
_	u
Ξ.	
G	o.
-	ū
US FLIGHT	ď
44	Σ
	₽
S	Z
=	
7	ㄷ
~	#
DAEDAL	2
4	
a i	ú

total Repeated scanlines	25	e So	. 6 9	: 6 5	i ge	88	53	B
total Interpolated scanlines	B	Ø	B	Ø	Ø	Ø	Ø	-
total Good scanlines	5743	2278	2971	2179	2179	2971	2575	5,849
Scan Speed (rps)	6.25	6.25	6.25	6.25	6.25	6.25	6.25	6.25
Altitude feet/meter	65888/19812	65888/19812	65888/19812	65888/19812	65888/19812	65000/19812	65888/19812	65 <i>000</i> /19812
L a]	21215	24383	27947	37.055	4.0223	57449	61409	69625
Actua scanline begin en	15473	22186	24977	34877	38Ø45	54479	58835	64577
Actual time (GMT) begin end	14:83:39.8 14:19: 3.8	14:21:26.8 14:27:32.8	14:29: 8.8 14:37: 5.8	14:55:39.8 15:81:38.8	15:84: 9.8 15:89:59.8	15:48:10.0 15:56: 8.0	15:59:51.Ø 16:Ø6:44.Ø	16:15:14.Ø 16:28:45.Ø
Check Points	A-B	Q-D	L - 11	H-0	r-1	י ב צ	Z 1 E	٩-0

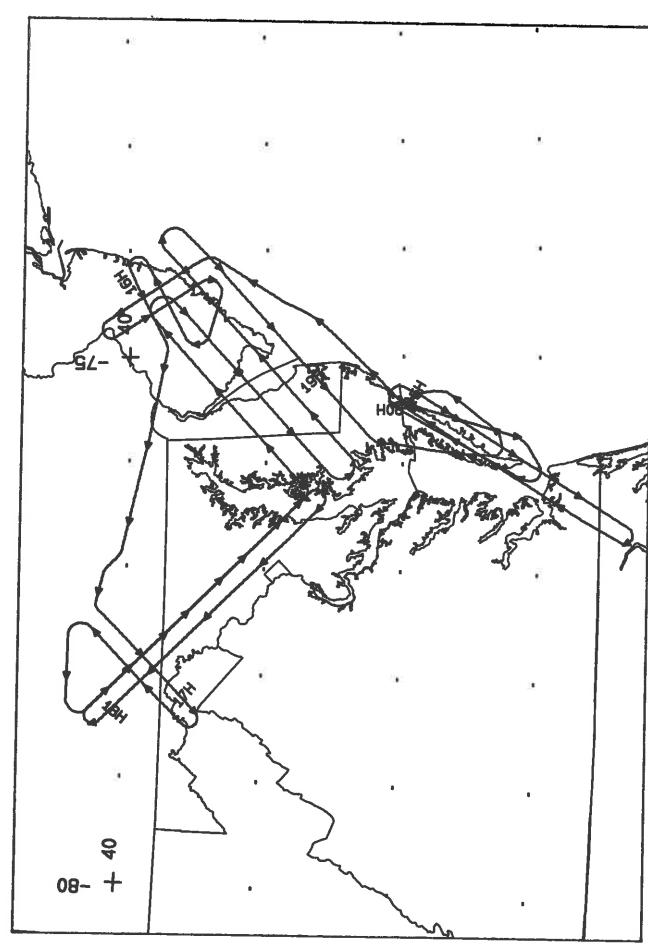


RC-10 / AVIRIS / MAS

A/C 708

16 JULY 1993

FLIGHT 93-138

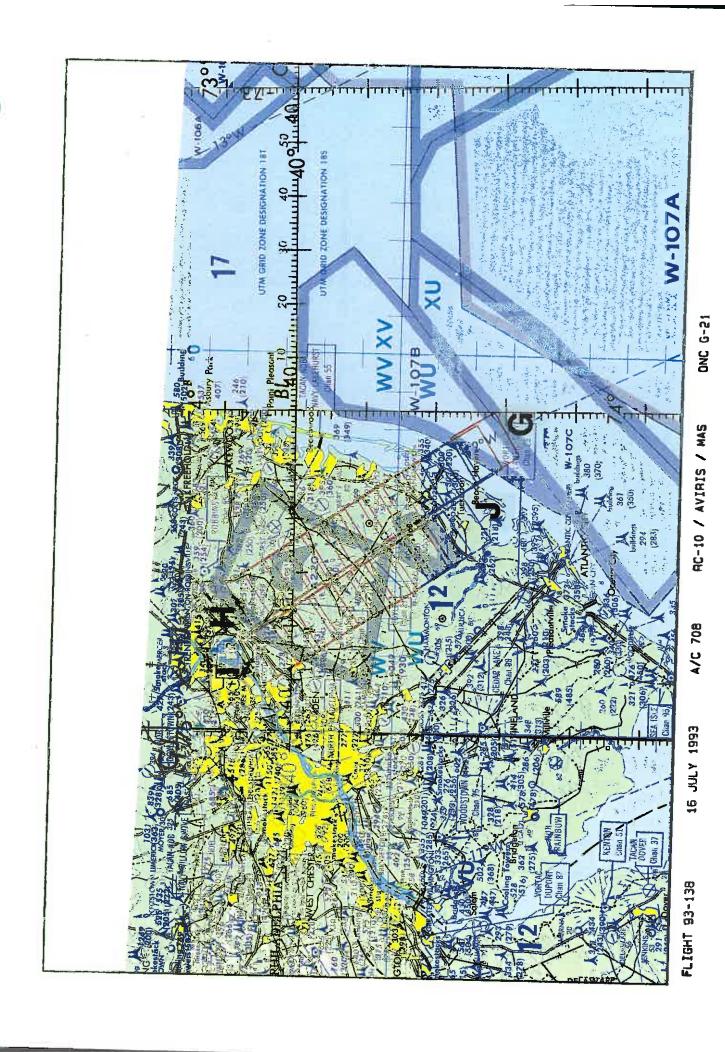

RC-10 / AVIRIS / MAS

CNC 8-21

A/C 708

16 JULY 1993

PLICHT 53-138