

FLIGHT SUMMARY REPORT

Flight Number: 93-147
Calendar/Julian Date: 07 August 1993 • 219
Sensor Package: Airborne Visible and Infrared Imaging Spectrometer (AVIRIS)
Modis Airborne Simulator (MAS)
Area(s) Covered: Iowa and Missouri

Investigator(s): Functional Sensor Flight
Sarture, JPL

Aircraft #: 708

SENSOR DATA

Accession #:	----	----
Sensor ID #:	099	108
Sensor Type:	AVIRIS	MAS
Focal Length:	----	----
Film Type:	----	----
Filtration:	----	----
Spectral Band:	----	----
f Stop:	----	----
Shutter Speed:	----	----
# of Frames:	----	----
% Overlap:	----	----
Quality:	----	Fair
Remarks:		

Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and *in situ* data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor(s) and camera(s) used for data collection during this flight.

Airborne Visible and Infrared Imaging Spectrometer

The Airborne Visible and Infrared Imaging Spectrometer (AVIRIS) is the second in the series of imaging spectrometer instruments developed at the Jet Propulsion Laboratory (JPL) for earth remote sensing. This instrument uses scanning optics and four spectrometers to image a 614 pixel swath simultaneously in 224 contiguous spectral bands (0.4-2.4 μm).

AVIRIS parameters are as follows:

IFOV:	1 mrad
Ground Resolution:	66 feet (20 meters) at 65,000 feet
Total Scan Angle:	30°
Swath Width:	5.7 nmi (10.6 km) at 65,000 feet
Spectral Coverage:	0.41-2.45 μm
Pixels/Scan Line:	614
Number of Spectral Bands:	224
Digitization:	10-bits
Data Rate:	17 MBPS

<u>Spectrometer</u>	<u>Wavelength Range</u>	<u>Number of Bands</u>	<u>Sampling Interval</u>
1	0.41 - 0.70 μm	31	9.4 nm
2	0.68 - 1.27 μm	63	9.4 nm
3	1.25 - 1.86 μm	63	9.7 nm
4	1.84 - 2.45 μm	63	9.7 nm

All AVIRIS data is decommutated and archived at JPL and not currently available for public distribution. For further information contact Rob Green at Jet Propulsion Laboratory, 4800 Oak Grove Drive, Mail Stop 183-501, Pasadena, California 91109-8099.

Modis Airborne Simulator

The Modis Airborne Simulator (MAS) is a modified Daedalus multispectral scanner. It records up to twelve 8-bit channels, which can be selected from an array of fifty available spectral bands. The band selection is made prior to flight and the instrument is hard-wired to that configuration. The following MAS band combination (configuration BOREAS) was used on this flight for BOREAS experiments:

<u>Data System Channel</u>	<u>MAS Channel</u>	<u>Band edges μm</u>
1	1	0.529 - 0.572
2	2	0.635 - 0.688
3	4	0.729 - 0.769
4	5	0.770 - 0.810
5	6	0.810 - 0.852
6	7	0.852 - 0.893
7	9	0.926 - 0.969
8	10	1.595 - 1.652
9	20	2.126 - 2.173
10	33	3.975 - 4.125
11	45	10.791 - 11.239
12	46	11.799 - 12.246

Sensor/Aircraft Parameters:

Spectral Channels:	50
Output Channels:	Twelve 8-bit
IFOV:	2.5 mrad
Ground Resolution:	163 feet (50 meters at 65,000 feet)
Total Scan Angle:	85.92°
Pixels/Scan Line:	716
Scan Rate:	6.25 scans/second
Ground Speed:	400 kts (206 m/second)
Roll Correction:	Plus or minus 3.5 degrees (approx.)

For specific information regarding flight documentation, sensor parameters, and areas of coverage contact the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: 415-604-6252). Additional information regarding ER-2 acquired photographic and digital data is also available through the Aircraft Data Facility.


MAS SCANNER FLIGHT LINE DATA

FLIGHT NO. 93-147

DAEDALUS FLIGHT DATA
FLIGHT NUMBER: 93-147

Check Points	A c t u a l t i m e (GMT)	A c t u a l s c a n l i n e b e g i n e n d	A l t i t u d e f e e t / m e t e r	S c a n S p e e d (r p s)	t o t a l G o o d s c a n l i n e s	t o t a l I n t e r p o l a t e d s c a n l i n e s	t o t a l R e p e a t e d s c a n l i n e s
A-B	18:00: 6.0 18:21: 3.0	49098 56919	65000/19812	6.20	7822	0	0

NOTE: Scan Speed (rps) is 6.25 NOT 6.20

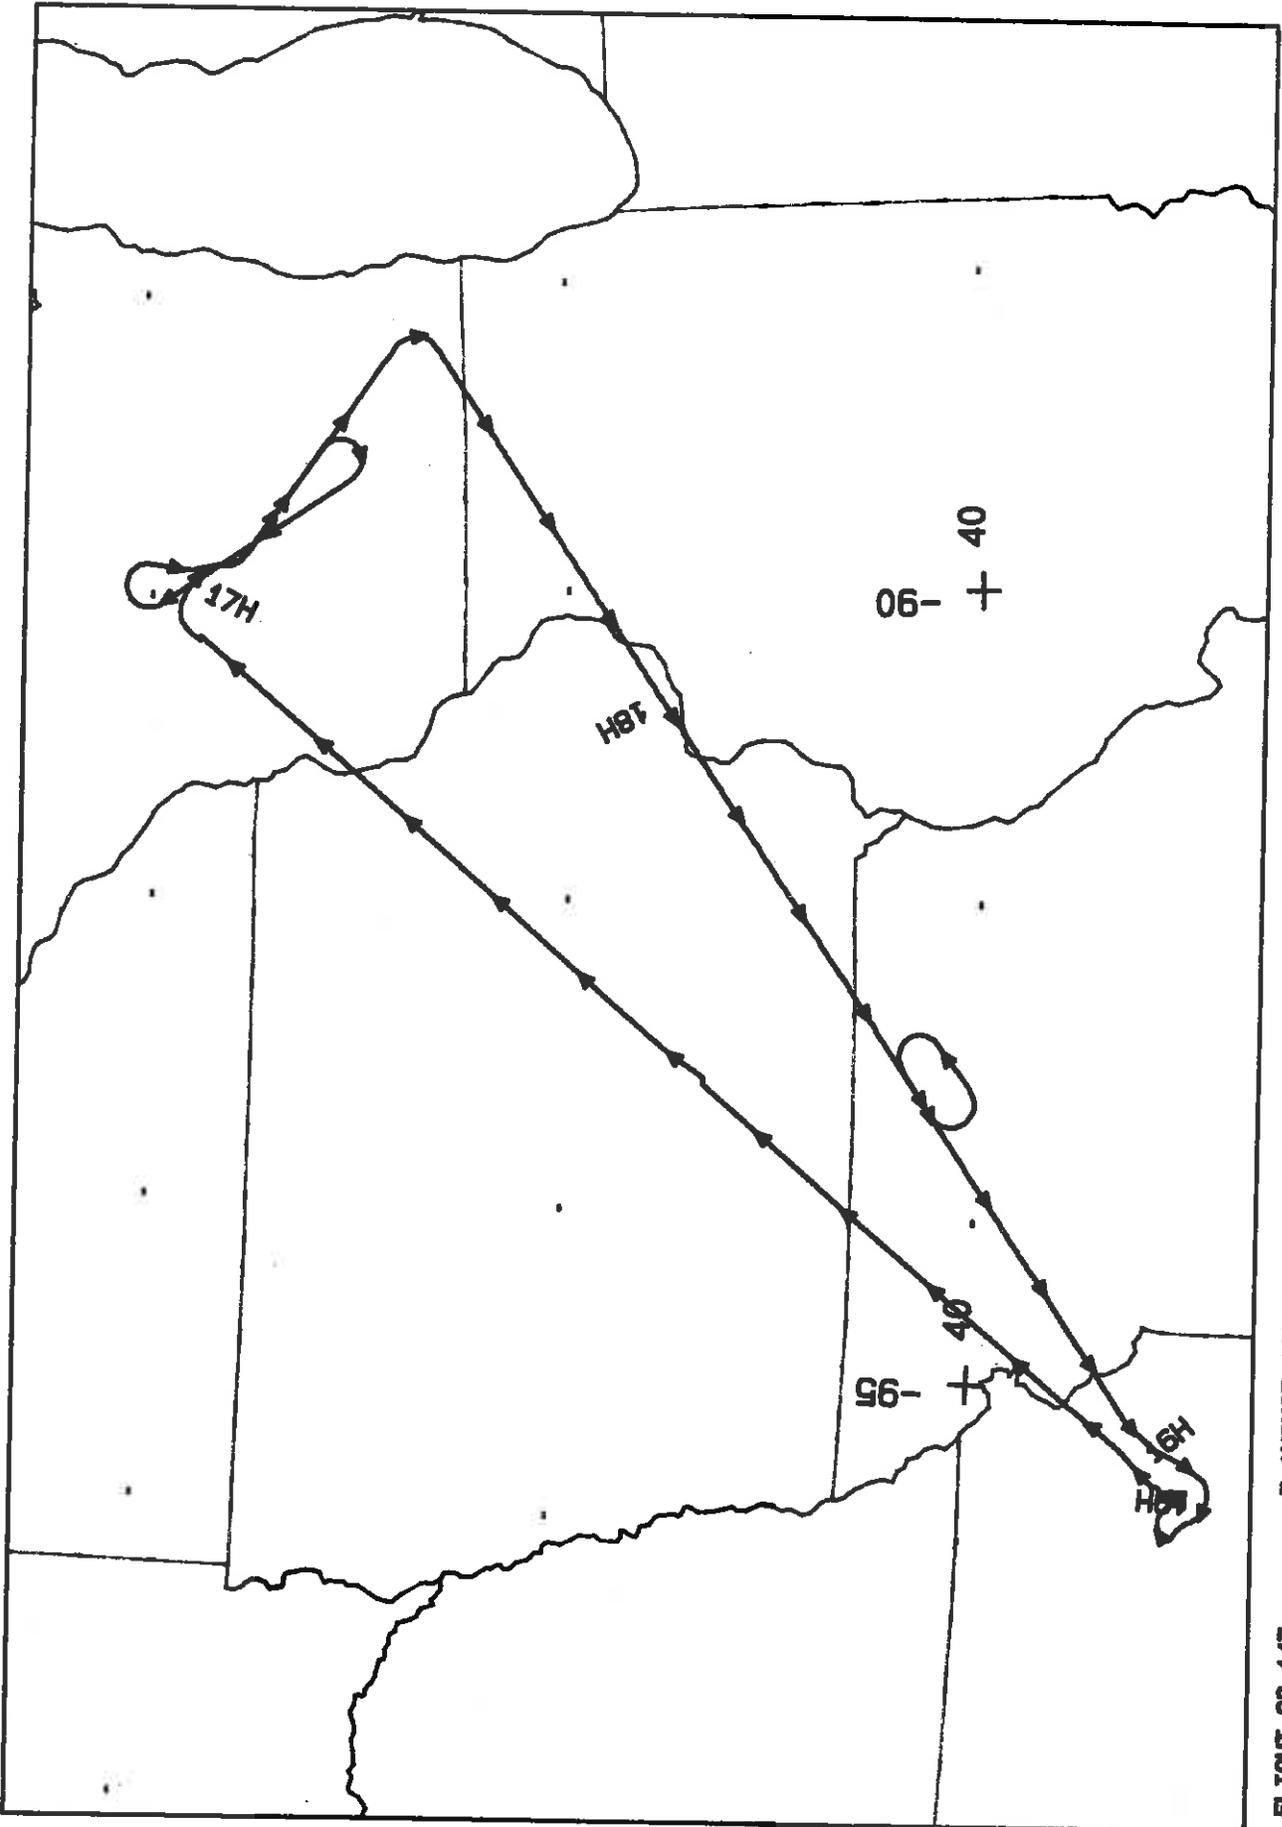


/ MAS / AVIRIS

A/C 708

7 AUGUST 1983

FLIGHT 93-147

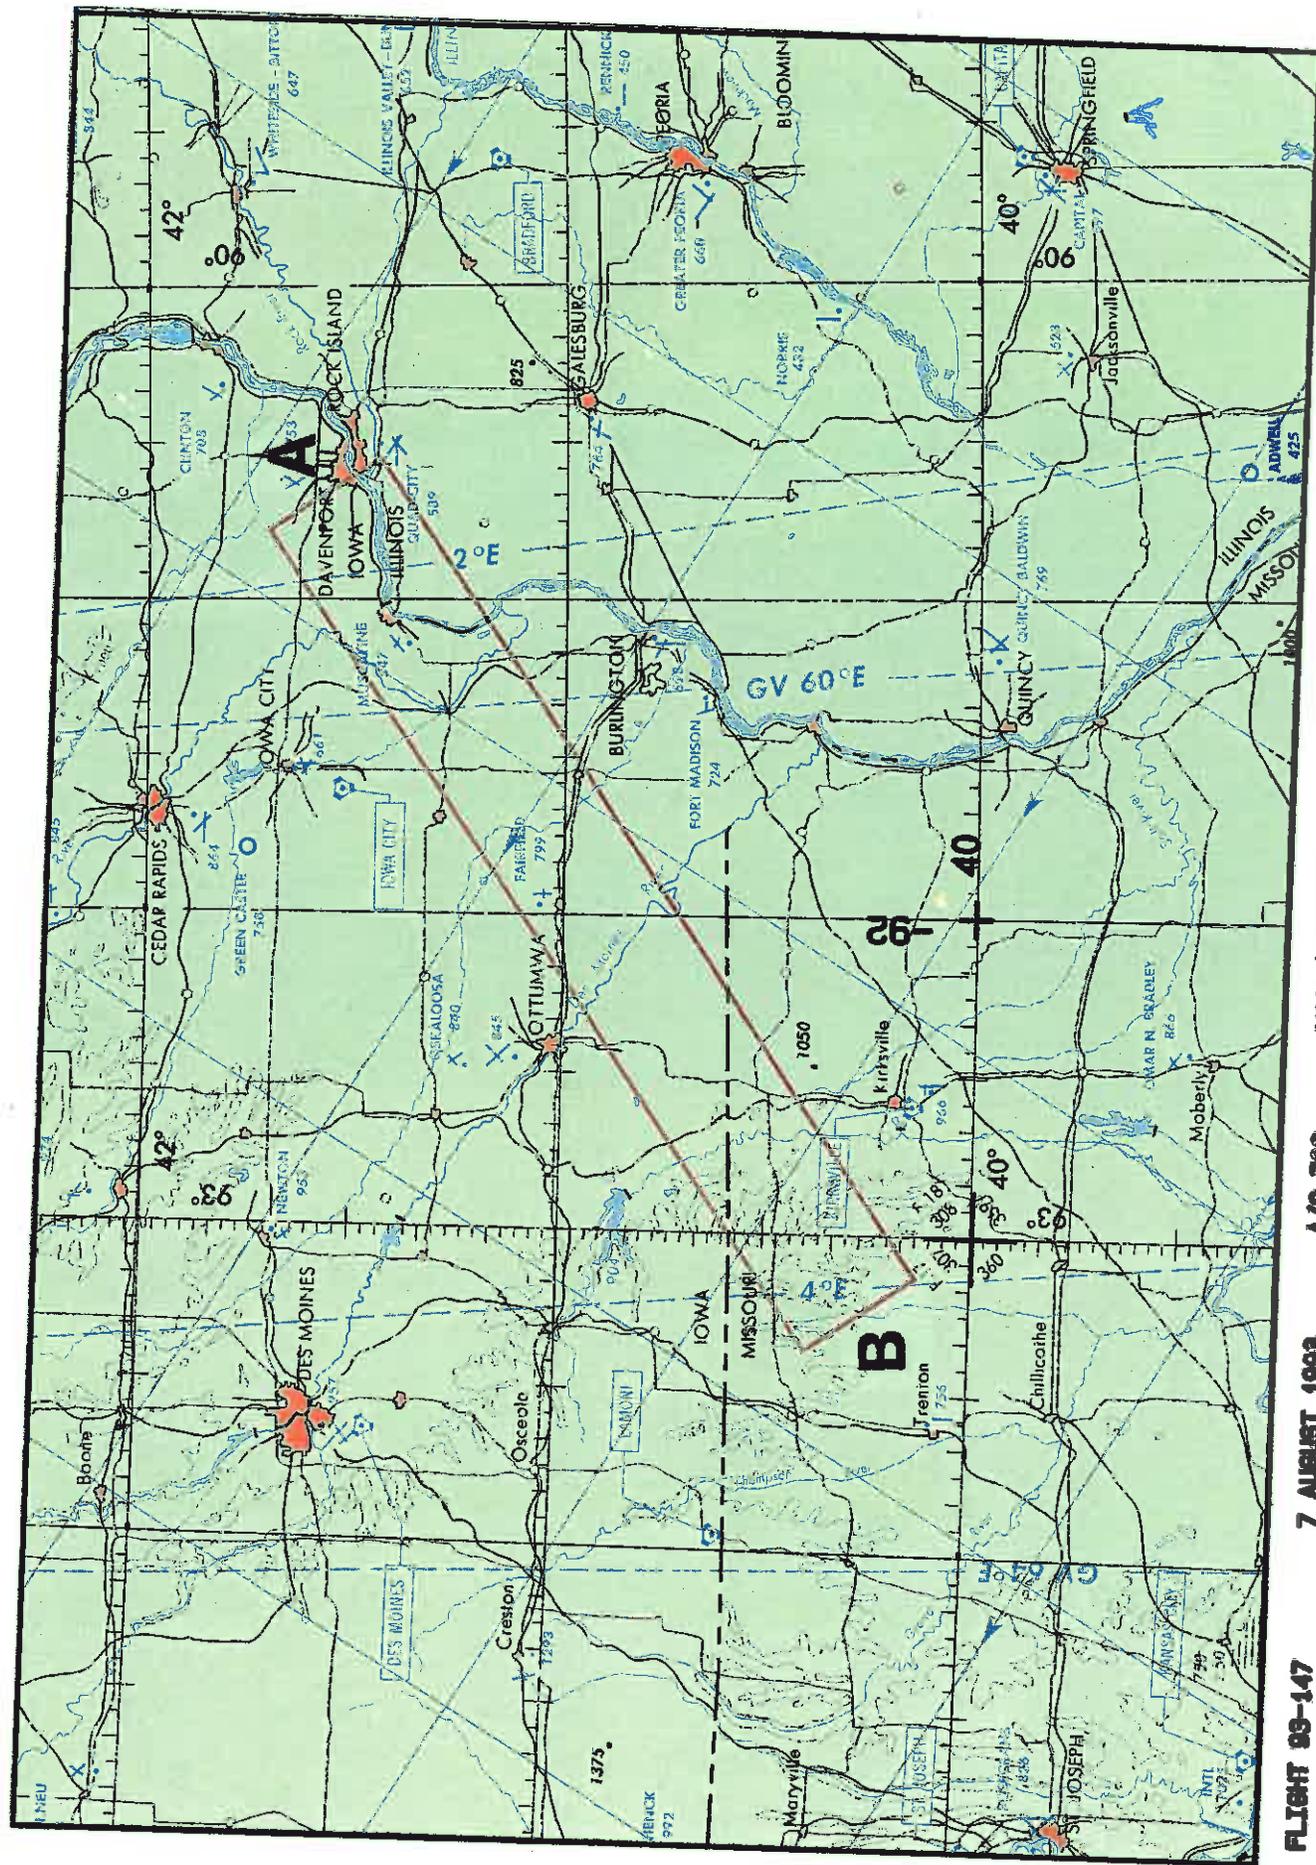

FLIGHT 99-147

7 AUGUST 1993

A/C 708

MAS / AVIRIS

JNC 44