

FLIGHT SUMMARY REPORT

Flight Number: 93-155
Calendar/Julian Date: 31 August 1993 • 243
Sensor Package: Wild-Heerbrug RC-10
Thematic Mapper Simulator (TMS)
Modis Airborne Simulator (MAS)
Area(s) Covered: Central California (Sacramento Day Flight)

Investigator(s): Bornstein, SJSU

Aircraft #: 709

SENSOR DATA

Accession #:	04624	-----	-----
Sensor ID #:	076	074	108
Sensor Type:	RC-10	TMS	MAS
Focal Length:	12" 304.89 mm	-----	-----
Film Type:	High Definition Aerochrome IR SO-131	-----	-----
Filtration:	cc.10B	-----	-----
Spectral Band:	510-900 nm	-----	-----
f Stop:	4	-----	-----
Shutter Speed:	1/150	-----	-----
# of Frames:	130	-----	-----
% Overlap:	60	-----	-----
Quality:	Good	Good	Good
Remarks:	Wrinkled filter--soft focus; camera clock offset 12.3 seconds from navigation data		

Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and *in situ* data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor(s) and camera(s) used for data collection during this flight.

Thematic Mapper Simulator

The Daedalus Thematic Mapper Simulator (TMS) is a multispectral scanner flown aboard the ER-2 aircraft which simulates spatial and spectral characteristics of the seven Landsat-D Thematic Mapper bands. The specific bands are as follows:

<u>Daedalus Channel</u>	<u>TM Band</u>	<u>Wavelength, μm</u>
1	A	0.42 - 0.45
2	1	0.45 - 0.52
3	2	0.52 - 0.60
4	B	0.60 - 0.62
5	3	0.63 - 0.69
6	C	0.69 - 0.75
7	4	0.76 - 0.90
8	D	0.91 - 1.05
9	5	1.55 - 1.75
10	7	2.08 - 2.35
11	6	8.5 - 14.0 low gain
12	6	8.5 - 14.0 high gain

Sensor/aircraft parameters are as follows:

IFOV:	1.25 mrad
Ground Resolution:	81 feet (25 meters) at 65,000 feet
Total Scan Angle:	43°
Swath Width:	8.4 nmi (15.6 km) at 65,000 feet
Pixels/Scan Line:	716
Scan Rate:	12.5 scans/second
Ground Speed:	400 kts (206 m/second)

Modis Airborne Simulator

The Modis Airborne Simulator (MAS) is a modified Daedalus multispectral scanner. It records up to twelve 8-bit channels, which can be selected from an array of fifty available spectral bands. The band selection is made prior to flight and the instrument is hard-wired to that configuration. The following MAS band combination (configuration BOREAS) was used on this flight for BOREAS experiments:

<u>Data System Channel</u>	<u>MAS Channel</u>	<u>Band edges μm</u>
1	1	0.529 - 0.572
2	2	0.635 - 0.688
3	4	0.729 - 0.769
4	5	0.770 - 0.810
5	6	0.810 - 0.852
6	7	0.852 - 0.893
7	9	0.926 - 0.969
8	10	1.595 - 1.652
9	20	2.126 - 2.173
10	33	3.975 - 4.125
11	45	10.791 - 11.239
12	46	11.799 - 12.246

Sensor/Aircraft Parameters:

Spectral Channels:	50
Output Channels:	Twelve 8-bit
IFOV:	2.5 mrad
Ground Resolution:	163 feet (50 meters at 65,000 feet)
Total Scan Angle:	85.92°
Pixels/Scan Line:	716
Scan Rate:	6.25 scans/second
Ground Speed:	400 kts (206 m/second)
Roll Correction:	Plus or minus 3.5 degrees (approx.)

Camera Systems

Various camera systems and films are used for photographic data collection. Film types include high definition color infrared, natural color, and black and white emulsions. Available photographic systems are as follows:

- Wild-Heerbrug RC-10 metric mapping camera
 - 9 x 9 inch film format
 - 6 inch focal length lens provides area coverage of 16 x 16 nautical miles from 65,000 feet
 - 12 inch focal length lens provides area coverage of 8 x 8 nautical miles from 65,000 feet
- Hycon HR-732 large scale mapping camera
 - 9 x 18 inch film format
 - 24 inch focal length lens provides area coverage of 4 x 8 nautical miles from 65,000 feet

- IRIS II Panoramic camera
 - 4.5 x 34.7 inch film format
 - 24 inch focal length lens
 - 90 degree field of view provides area coverage of 2 x 21.4 nautical miles from 65,000 feet

The U.S. Geological Survey's EROS Data Center at Sioux Falls, South Dakota serves as the archive and product distribution facility for NASA-Ames aircraft acquired photographic and digital imagery. For information regarding photography and digital data (including areas of coverage, products, and product costs) contact EROS Data Center, Customer Services, Sioux Falls, South Dakota 57198 (Telephone: 605-594-6151).

For specific information regarding flight documentation, sensor parameters, and areas of coverage contact the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: 415-604-6252). Additional information regarding ER-2 acquired photographic and digital data is also available through the Aircraft Data Facility.

**CAMERA FLIGHT LINE DATA
FLIGHT NO. 93-155**

Accession # 04624

Sensor # 076

Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
A - B	0695-0757	21:34:54	22:04:49	65000/19800	10% cirrus (frames 0715-0720 and 0730-0734); 10-70% cumulus (frames 0735-0757)
C - D	0758-0824	22:13:03	22:43:45	"	10-80% cumulus (frames 0758-0775); minor cumulus (frame 0776); 10-40% cirrus (frames 0805-0815); minor-30% cirrus (frames 0817-0824); oblique (frames 0823-0824)

TMS SCANNER FLIGHT LINE DATA

FLIGHT NO. 93-155

DAEDALUS FLIGHT DATA
FLIGHT NUMBER: 93-155


Check Points	Act u a l t i m e b e g i n	(GMT) d	Act u a l s c a n l i n e b e g i n	Altitude feet/meter	Scan Speed (rps)	total G o o d s c a n l i n e s	total I n t e r p o l a t e d s c a n l i n e s	total R e p e a t e d s c a n l i n e s
A-B	21:34:49.0	22:04:47.0	25115	65000/19812	12.50	22473	1	0
C-D	22:12:50.0	22:43:20.0	53627	65000/19812	12.50	22869	1	0

MAS SCANNER FLIGHT LINE DATA


FLIGHT NO. 93-155

DAILY FLIGHT DATA
FLIGHT NUMBER: 93-155

Check Points	Actual Time (GMT)	Actual scanline begin end	Altitude feet/meter	Scan speed (fps)	Total scans	Total Interpolated scans	Total Repeated scans
A-B	21:34:36.0 22:04:31.0	12308 23673	63000/19812	6.25	1134	0	4
C-D	22:11:47.0 22:43:20.0	26269 38058	63000/19812	6.25	1172	0	0

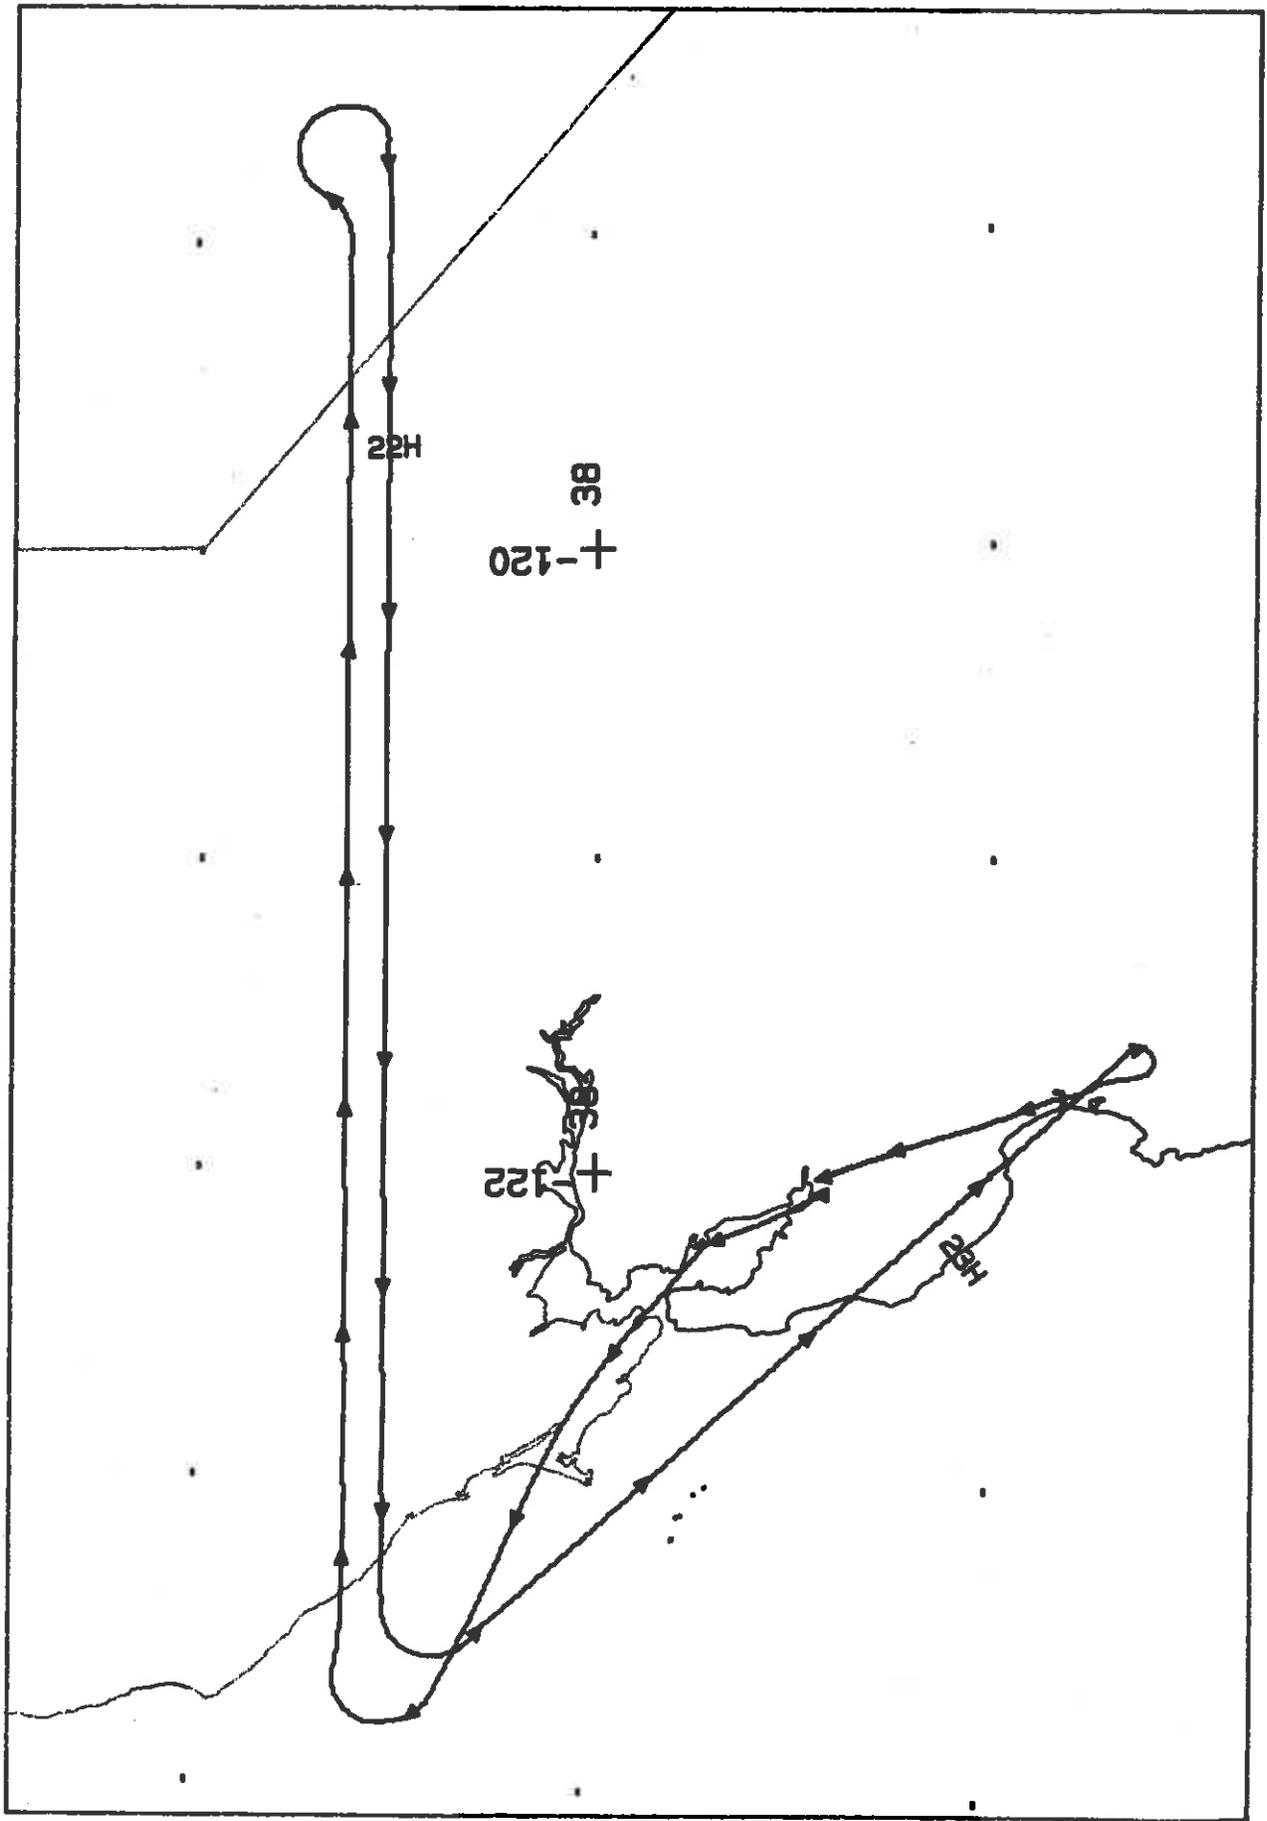

FLIGHT 99-155 31 AUGUST 1993 A/C 709 RC-10 / TMS / MAS

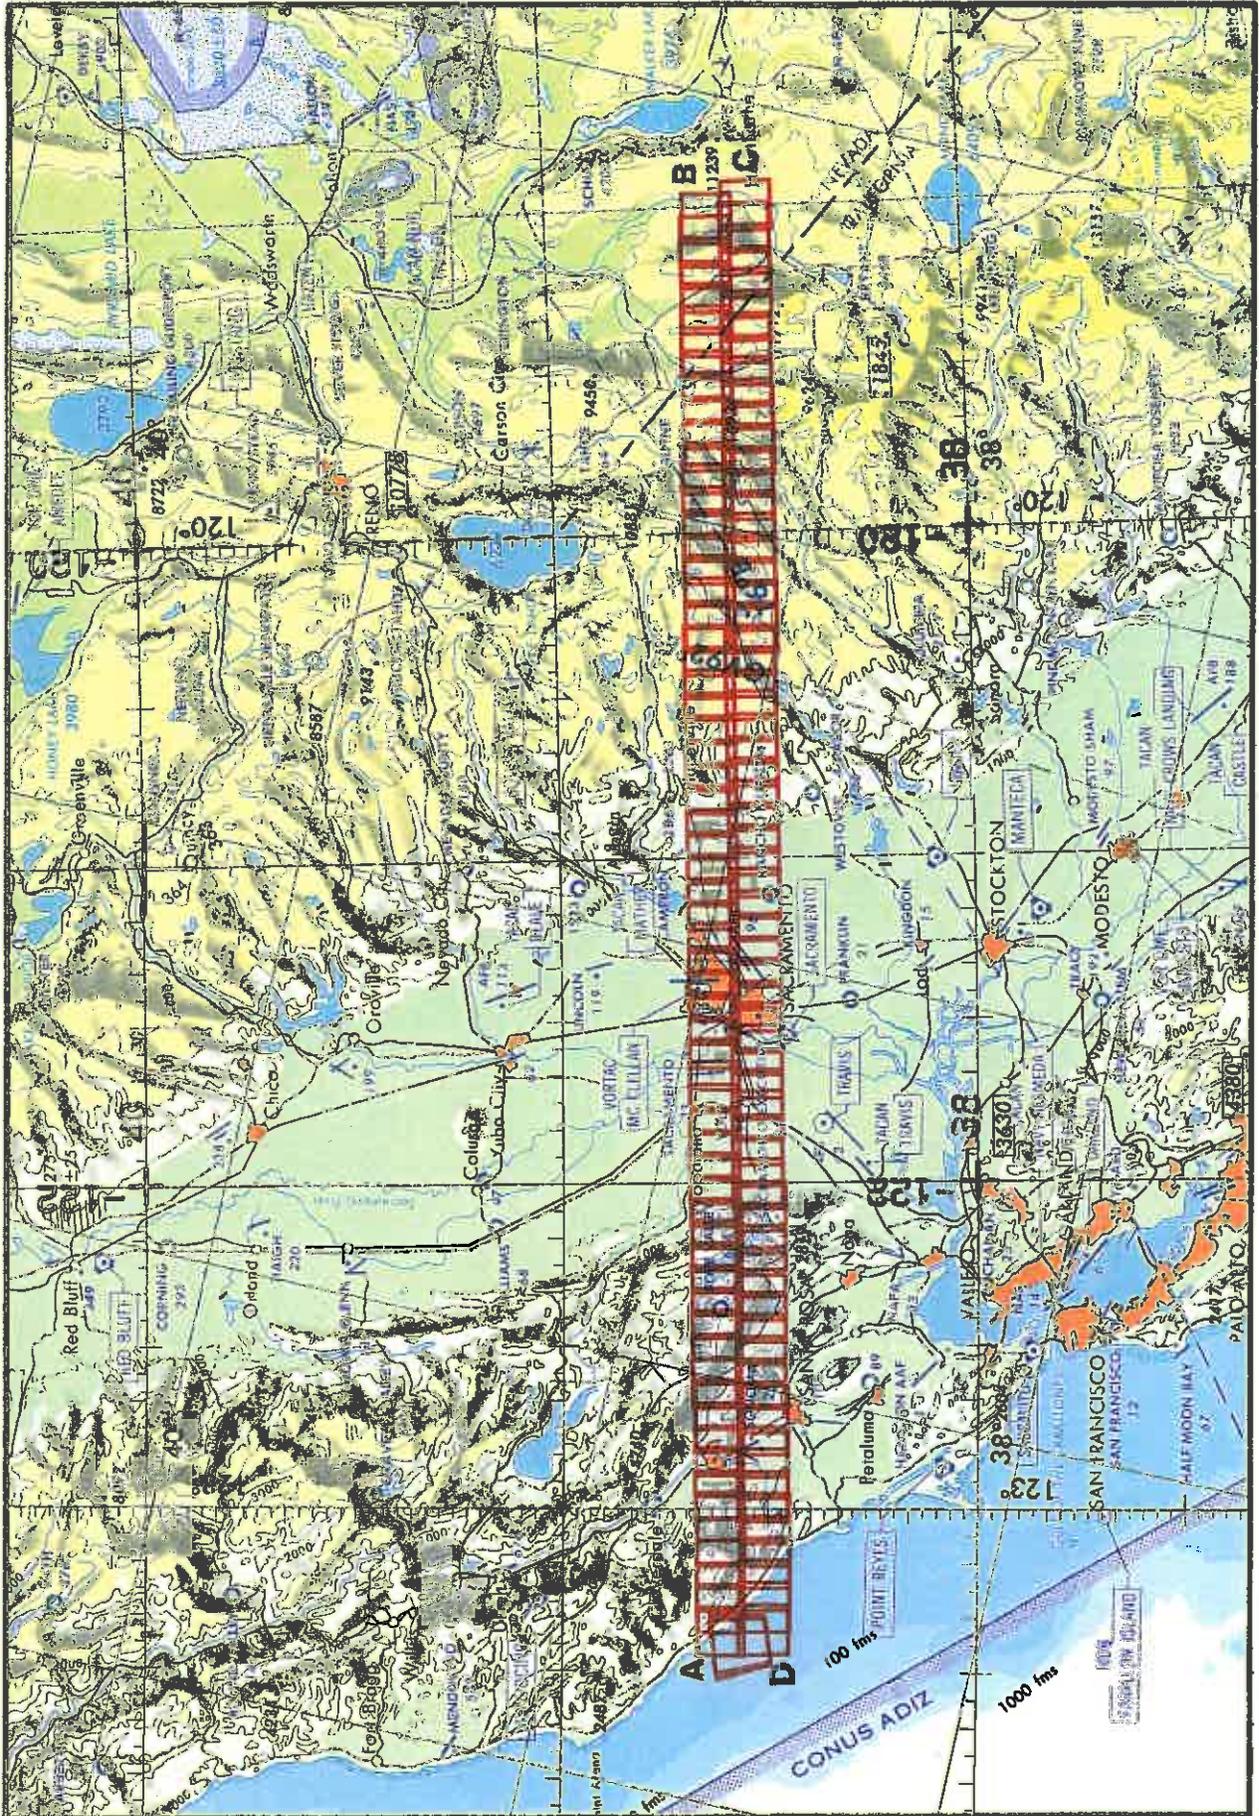

FLIGHT 99-155

31 AUGUST 1983

A/C 709

RC-10 / TMS / HAS

JNC 43