

FLIGHT SUMMARY REPORT

Flight Number: 94-145
Calendar/Julian Date: 21 September 1994 • 264
Sensor Package: Wild-Heerbrug RC-10
Airborne Visible and Infrared Imaging
Spectrometer (AVIRIS)
Modis Airborne Simulator (MAS)
Area(s) Covered: Northern California/Western Washington

Investigator(s): Kaufman, GSFC

Aircraft #: 706

SENSOR DATA

Accession #:	04813	----	----
Sensor ID #:	076	099	108
Sensor Type:	RC-10	AVIRIS	MAS
Focal Length:	12" 304.89 mm	----	----
Film Type:	Aerochrome IR SO-060	----	----
Filtration:	Wratten 12	----	----
Spectral Band:	510-900 nm	----	----
f Stop:	11	----	----
Shutter Speed:	1/150	----	----
# of Frames:	319	----	----
% Overlap:	60	----	----
Quality:	Excellent	----	Good
Remarks:	Camera clock offset 28.0 seconds from navigation data		

Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and *in situ* data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor(s) and camera(s) used for data collection during this flight.

Airborne Visible and Infrared Imaging Spectrometer

The Airborne Visible and Infrared Imaging Spectrometer (AVIRIS) is the second in the series of imaging spectrometer instruments developed at the Jet Propulsion Laboratory (JPL) for earth remote sensing. This instrument uses scanning optics and four spectrometers to image a 614 pixel swath simultaneously in 224 contiguous spectral bands (0.4-2.4 μm).

AVIRIS parameters are as follows:

IFOV:	1 mrad
Ground Resolution:	66 feet (20 meters) at 65,000 feet
Total Scan Angle:	30°
Swath Width:	5.7 nmi (10.6 km) at 65,000 feet
Spectral Coverage:	0.41-2.45 μm
Pixels/Scan Line:	614
Number of Spectral Bands:	224
Digitization:	10-bits
Data Rate:	17 MBPS

<u>Spectrometer</u>	<u>Wavelength Range</u>	<u>Number of Bands</u>	<u>Sampling Interval</u>
1	0.41 - 0.70 μm	31	9.4 nm
2	0.68 - 1.27 μm	63	9.4 nm
3	1.25 - 1.86 μm	63	9.7 nm
4	1.84 - 2.45 μm	63	9.7 nm

All AVIRIS data is decommutated and archived at JPL and not currently available for public distribution. For further information contact Rob Green at Jet Propulsion Laboratory, 4800 Oak Grove Drive, Mail Stop 183-501, Pasadena, California 91109-8099.

Modis Airborne Simulator

The Modis Airborne Simulator (MAS) is a modified Daedalus multispectral scanner. It records up to twelve 8-bit channels, which can be selected from an array of fifty available spectral bands. The band selection is made prior to flight and the instrument is hard-wired to that configuration. Channel 1 is used to store additional bits which provide 10-bit resolution for channels 9 through 12. The following MAS band combination (configuration SCAR-C) was used on this flight for SCAR-C data acquisition:

<u>Data System Channel</u>	<u>MAS Channel</u>	<u>Band edges μm</u>
1	--	-----
2	1	0.529 - 0.572
3	10	1.595 - 1.652
4	10	1.595 - 1.652
5	15	1.855 - 1.905
6	20	2.126 - 2.173
7	46	11.799 - 12.246
8	32	3.825 - 3.975
9*	2	0.635 - 0.688
10*	7	0.852 - 0.893
11*	45	10.791 - 11.239
12*	32	3.825 - 3.975

* 10-bit resolution

Sensor/Aircraft Parameters:

Spectral Channels:	50
Output Channels:	Seven 8-bit and four 10-bit
IFOV:	2.5 mrad
Ground Resolution:	163 feet (50 meters at 65,000 feet)
Total Scan Angle:	85.92°
Pixels/Scan Line:	716
Scan Rate:	6.25 scans/second
Ground Speed:	400 kts (206 m/second)
Roll Correction:	Plus or minus 3.5 degrees (approx.)

Camera Systems

Various camera systems and films are used for photographic data collection. Film types include high definition color infrared, natural color, and black and white emulsions. Available photographic systems are as follows:

- Wild-Heerbrug RC-10 metric mapping camera
 - 9 x 9 inch film format
 - 6 inch focal length lens provides area coverage of 16 x 16 nautical miles from 65,000 feet
 - 12 inch focal length lens provides area coverage of 8 x 8 nautical miles from 65,000 feet
- Hycon HR-732 large scale mapping camera
 - 9 x 18 inch film format

- 24 inch focal length lens provides area coverage of 4 x 8 nautical miles from 65,000 feet
- IRIS II Panoramic camera
 - 4.5 x 34.7 inch film format
 - 24 inch focal length lens
 - 90 degree field of view provides area coverage of 2 x 21.4 nautical miles from 65,000 feet

The U.S. Geological Survey's EROS Data Center at Sioux Falls, South Dakota serves as the archive and product distribution facility for NASA-Ames aircraft acquired photographic and digital imagery. For information regarding photography and digital data (including areas of coverage, products, and product costs) contact EROS Data Center, Customer Services, Sioux Falls, South Dakota 57198 (Telephone: 605-594-6151).

For specific information regarding flight documentation, sensor parameters, and areas of coverage contact the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: 415-604-6252). Additional information regarding ER-2 acquired photographic and digital data is also available through the Aircraft Data Facility.

**CAMERA FLIGHT LINE DATA
FLIGHT NO. 94-145**

Accession # 04813

Sensor # 076

Page 1/3

Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
A - B	6917-6950	17:37:22	17:53:12	55000/16800	10-50% smoke and cumulus (frames 6940-6943)
B - C	6951-6953	17:53:41	17:54:38	60000/18300	Clear; oblique frames
C - D	6954-6983	17:55:07	18:08:31	61000/18600	Minor smoke (frames 6965-6967); minor-50% smoke and cumulus (frames 6974-6979)
E - F	6984-6992	19:00:23	19:04:07	63000/19200	Clear
G - H	6993-7013	19:10:07	19:19:28	"	10-20% smoke and cumulus (frames 6998-7001)
E - I	7014-7021	19:32:47	19:36:02	"	10% smoke (frames 7016-7018)
J - K	7022-7035	19:42:27	19:48:19	64000/19500	10-30% smoke and cumulus (frames 7024-7029)
L - M	7036-7046	19:55:59	20:00:38	"	10-30% smoke and cumulus (frames 7040-7045)

**CAMERA FLIGHT LINE DATA
FLIGHT NO. 94-145**

Accession # 04813

Sensor # 076

Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
J - K	7047-7060	20:07:44	20:13:48	64000/19500	10-30% smoke and cumulus (frames 7049-7055)
L - M	7061-7074	20:21:28	20:27:19	"	Minor-30% smoke and cumulus (frames 7065-7071)
J - N	7075-7091	20:34:58	20:42:25	"	10-30% smoke and cumulus (frames 7077-7085)
O - M	7092-7108	20:50:57	20:58:25	65000/19800	10-30% smoke and cumulus (frames 7096-7108)
J - N	7109-7126	21:05:58	21:13:54	"	Minor-50% smoke and cumulus (frames 7110-7120); severe emulsion abrasion (frame 7115)
P - M	7127-7146	21:20:36	21:29:28	"	Minor-40% smoke and cumulus (frames 7131-7146); severe emulsion abrasion (frame 7139)
M - N	7147-7171	21:37:50	21:49:02	"	10-40% smoke and cumulus (frames 7147-7168); severe emulsion abrasion (frame 7155)

**CAMERA FLIGHT LINE DATA
FLIGHT NO. 94-145**

Accession # 04813

Sensor # 076


Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
K - J	7172-7183	21:54:26	21:59:34	65000/19800	10-50% smoke and cumulus; emulsion abrasion (frame 7183)
E - F	7184-7188	22:02:37	22:04:18	"	10-30% smoke and cumulus
M - L	7189-7201	22:11:01	22:16:37	"	10-30% smoke and cumulus (frames 7189-7200); emulsion abrasions (frames 7199-7201)
D - Q	7202-7212	23:04:38	23:09:16	"	20-50% smoke and cumulus (frames 7202-7208)
R - S	7213-7235	23:22:27	23:32:41	"	10-30% smoke and cumulus (frames 7213-7218); emulsion abrasin (frame 7226)

MAS SCANNER FLIGHT LINE DATA

FLIGHT NO. 94-145

DAEDALUS FLIGHT DATA
FLIGHT NUMBER: 94-145

Check Points	A c t u a l t i m e b e g i n	A c t u a l s c a n l i n e b e g i n	A l t i t u d e f e e t / m e t e r	Scan Speed (rps)	t o t a l G o o d s c a n l i n e s	t o t a l I n t e r p o l a t e d s c a n l i n e s	t o t a l R e p e a t e d s c a n l i n e s
A-B	17:37: 9.0	17:53: 4.0	55000/16764	6.25	5941	0	0
C-D	17:54:56.0	18:08:12.0	61000/18592	6.25	4951	0	0
E-F	18:59:26.0	19:03:57.0	63000/19202	6.25	1684	0	0
G-H	19:09:47.0	19:19: 5.0	63000/19202	6.25	3466	0	0
E-I	19:32:22.0	19:36: 5.0	63000/19202	6.25	1387	0	0
J-K	19:41:39.0	19:48: 1.0	64000/19507	6.25	2377	0	0
L-M	19:54:56.0	20:00:30.0	64000/19507	6.25	2079	1	0
J-K	20:07: 9.0	20:13:31.0	64000/19507	6.25	2377	0	0
L-M	20:20:25.0	20:27: 3.0	64000/19507	6.25	2476	0	0
J-N	20:32:54.0	20:42:12.0	64000/19507	6.25	3466	0	0
O-M	20:49: 6.0	20:58: 8.0	65000/19812	6.25	3366	1	0
J-N	21:04:14.0	21:13:32.0	65000/19812	6.25	3466	0	0
P-M	21:18:50.0	21:30:15.0	65000/19812	6.25	4258	0	0
M-N	21:36:54.0	21:49: 7.0	65000/19812	6.25	4554	1	0
K-J	21:53:38.0	21:59:12.0	65000/19812	6.25	2080	0	0
E-F	22:02: 7.0	22:03:59.0	65000/19812	6.25	694	0	0
M-L	22:10:21.0	22:16:28.0	65000/19812	6.25	2278	0	0
D-Q	23:04:16.0	23:10: 6.0	65000/19812	6.25	2179	0	0
R-S	23:21:47.0	23:34: 0.0	65000/19812	6.25	4555	0	0

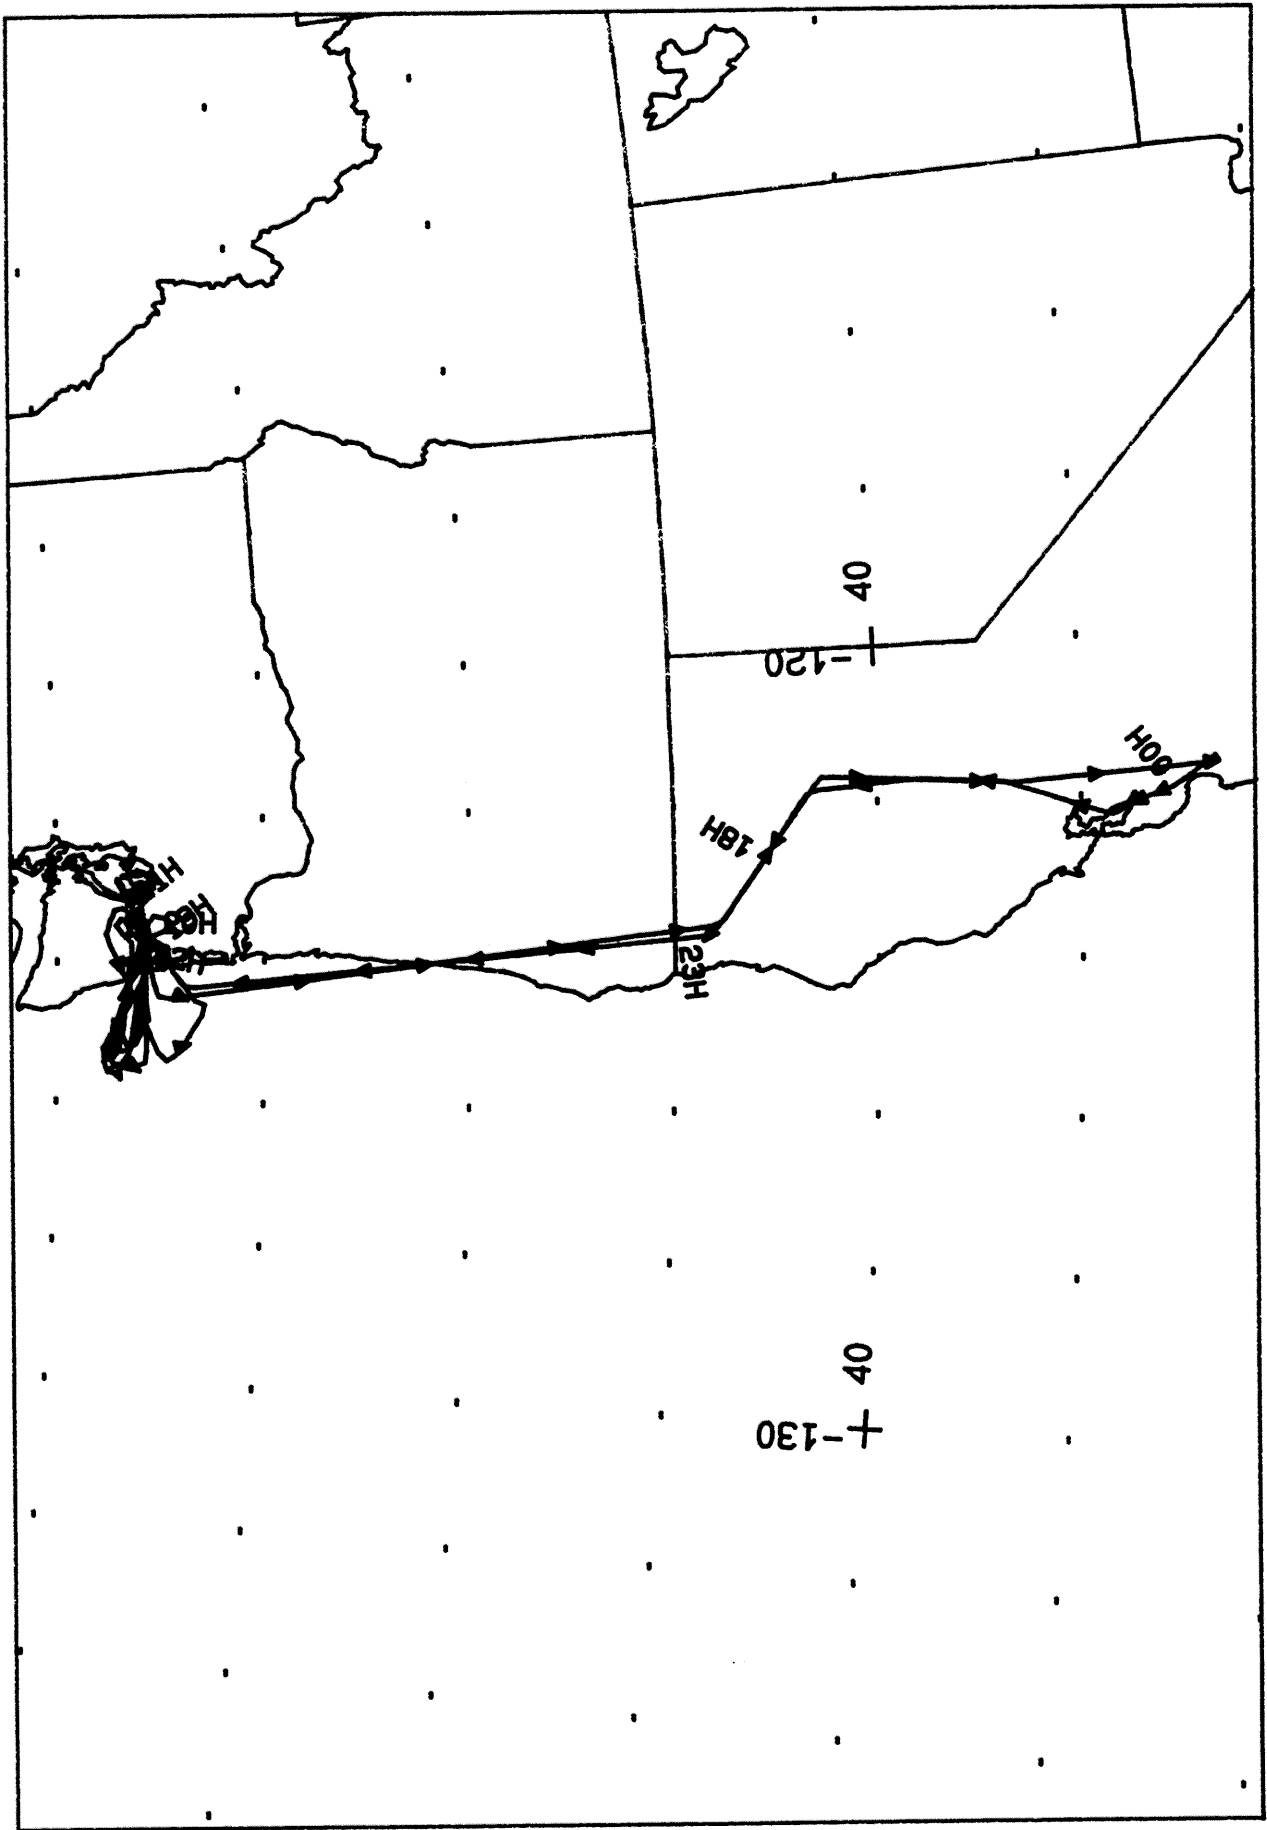


FC-10 / MAS / AVIRIS

A/C 706

21 SEPTEMBER 1994

FLIGHT 94-145

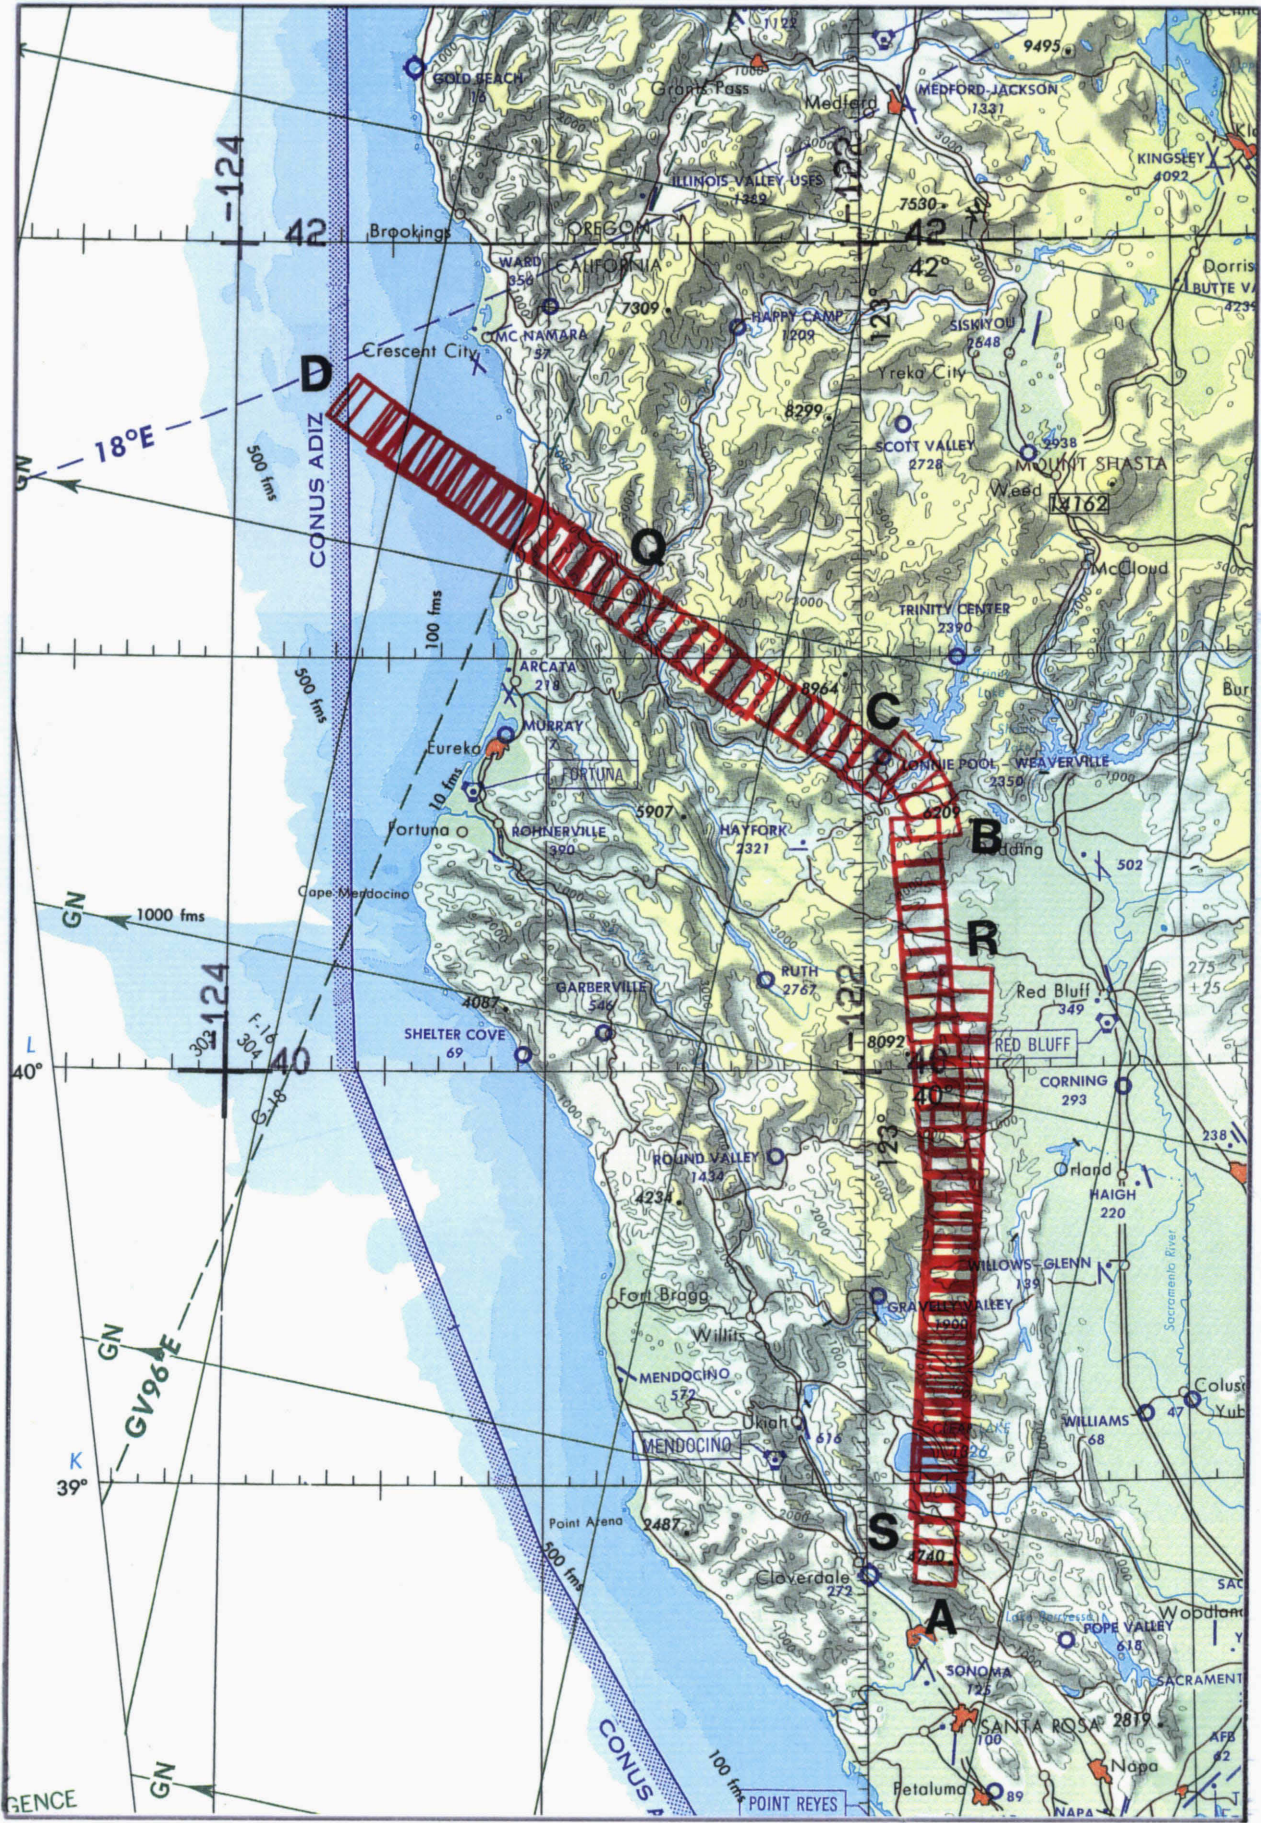

FLIGHT 94-145
 21 SEPTEMBER 1994
 A/C 706
 RC-10 / MAS / AVIRIS
 JNC 43

