

FLIGHT SUMMARY REPORT

Flight Number: 94-152
Calendar/Julian Date: 22 September 1994 • 265
Sensor Package: Wild-Heerbrug RC-10
Airborne Visible and Infrared Imaging
Spectrometer (AVIRIS)
Modis Airborne Simulator (MAS)
Area(s) Covered: Northern California, Washington,
Oregon

Investigator(s): Kaufman, GSFC; Ustin, UC Davis

Aircraft #: 706

SENSOR DATA

Accession #:	04814	-----	-----
Sensor ID #:	076	099	108
Sensor Type:	RC-10	AVIRIS	MAS
Focal Length:	12" 304.89 mm	-----	-----
Film Type:	Aerochrome IR SO-060	-----	-----
Filtration:	Wratten 12	-----	-----
Spectral Band:	510-900 nm	-----	-----
f Stop:	11	-----	-----
Shutter Speed:	1/100	-----	-----
# of Frames:	102	-----	-----
% Overlap:	60	-----	-----
Quality:	Excellent	-----	Good
Remarks:	Camera clock offset 22.1 seconds from navigation data		

Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and *in situ* data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor(s) and camera(s) used for data collection during this flight.

Airborne Visible and Infrared Imaging Spectrometer

The Airborne Visible and Infrared Imaging Spectrometer (AVIRIS) is the second in the series of imaging spectrometer instruments developed at the Jet Propulsion Laboratory (JPL) for earth remote sensing. This instrument uses scanning optics and four spectrometers to image a 614 pixel swath simultaneously in 224 contiguous spectral bands (0.4-2.4 μm).

AVIRIS parameters are as follows:

IFOV:	1 mrad
Ground Resolution:	66 feet (20 meters) at 65,000 feet
Total Scan Angle:	30°
Swath Width:	5.7 nmi (10.6 km) at 65,000 feet
Spectral Coverage:	0.41-2.45 μm
Pixels/Scan Line:	614
Number of Spectral Bands:	224
Digitization:	10-bits
Data Rate:	17 MBPS

<u>Spectrometer</u>	<u>Wavelength Range</u>	<u>Number of Bands</u>	<u>Sampling Interval</u>
1	0.41 - 0.70 μm	31	9.4 nm
2	0.68 - 1.27 μm	63	9.4 nm
3	1.25 - 1.86 μm	63	9.7 nm
4	1.84 - 2.45 μm	63	9.7 nm

All AVIRIS data is decommutated and archived at JPL and not currently available for public distribution. For further information contact Rob Green at Jet Propulsion Laboratory, 4800 Oak Grove Drive, Mail Stop 183-501, Pasadena, California 91109-8099.

Modis Airborne Simulator

The Modis Airborne Simulator (MAS) is a modified Daedalus multispectral scanner. It records up to twelve 8-bit channels, which can be selected from an array of fifty available spectral bands. The band selection is made prior to flight and the instrument is hard-wired to that configuration. Channel 1 is used to store additional bits which provide 10-bit resolution for channels 9 through 12. The following MAS band combination (configuration SCAR-C) was used on this flight for SCAR-C data acquisition:

<u>Data System Channel</u>	<u>MAS Channel</u>	<u>Band edges μm</u>
1	--	-----
2	1	0.529 - 0.572
3	10	1.595 - 1.652
4	10	1.595 - 1.652
5	15	1.855 - 1.905
6	20	2.126 - 2.173
7	46	11.799 - 12.246
8	32	3.825 - 3.975
9*	2	0.635 - 0.688
10*	7	0.852 - 0.893
11*	45	10.791 - 11.239
12*	32	3.825 - 3.975

* 10-bit resolution

Sensor/Aircraft Parameters:

Spectral Channels:	50
Output Channels:	Seven 8-bit and four 10-bit
IFOV:	2.5 mrad
Ground Resolution:	163 feet (50 meters at 65,000 feet)
Total Scan Angle:	85.92°
Pixels/Scan Line:	716
Scan Rate:	6.25 scans/second
Ground Speed:	400 kts (206 m/second)
Roll Correction:	Plus or minus 3.5 degrees (approx.)

Camera Systems

Various camera systems and films are used for photographic data collection. Film types include high definition color infrared, natural color, and black and white emulsions. Available photographic systems are as follows:

- Wild-Heerbrug RC-10 metric mapping camera
 - 9 x 9 inch film format
 - 6 inch focal length lens provides area coverage of 16 x 16 nautical miles from 65,000 feet
 - 12 inch focal length lens provides area coverage of 8 x 8 nautical miles from 65,000 feet
- Hycon HR-732 large scale mapping camera
 - 9 x 18 inch film format

- 24 inch focal length lens provides area coverage of 4 x 8 nautical miles from 65,000 feet
- IRIS II Panoramic camera
 - 4.5 x 34.7 inch film format
 - 24 inch focal length lens
 - 90 degree field of view provides area coverage of 2 x 21.4 nautical miles from 65,000 feet

The U.S. Geological Survey's EROS Data Center at Sioux Falls, South Dakota serves as the archive and product distribution facility for NASA-Ames aircraft acquired photographic and digital imagery. For information regarding photography and digital data (including areas of coverage, products, and product costs) contact EROS Data Center, Customer Services, Sioux Falls, South Dakota 57198 (Telephone: 605-594-6151).

For specific information regarding flight documentation, sensor parameters, and areas of coverage contact the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: 415-604-6252). Additional information regarding ER-2 acquired photographic and digital data is also available through the Aircraft Data Facility.

**CAMERA FLIGHT LINE DATA
FLIGHT NO. 94-152**

Accession # 04814
Sensor # 076

Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
C - D	7242-7253	19:12:15	19:17:28	65000/19800	10-60% smoke and cumulus (frames 7244-7251)
E - F	7254-7258	19:24:17	19:26:10	"	10-70% smoke and cumulus
G - H	7259-7268	19:40:11	19:44:26	"	30-70% strato-cumulus (frames 7259-7260); 90-100% strato-cumulus (frames 7261-7268)
I - J	7269-7280	20:04:00	20:09:09	"	Minor-50% smoke and cumulus (frames 7269-7279)
K - L	7281-7290	20:59:57	21:04:06	"	Clear
M - N	7291-7299	21:22:22	21:26:05	"	Clear
O - P	7300-7307	21:37:54	21:41:09	"	Clear; emulsion damage (frames 7302-7304)
Q - R	7308-7318	21:50:32	21:55:11	"	Minor-10% smoke (frames 7312-7315); 10-30% strato-cumulus (frames 7315-7316); 60-90% strato-cumulus (frames 7317-7318)

**CAMERA FLIGHT LINE DATA
FLIGHT NO. 94-152**

Accession # 04814

Sensor # 076

Page 2/2


Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
S - T	7319-7329	22:04:14	22:08:54	65000/19800	50-90% strato-cumululus (frames 7319-7323); 20% strato-cumululus (frame 7324); minor-20% smoke (frames 7325-7328)
U - V	7330-7343	22:14:26	22:20:30	"	Clear

MAS SCANNER FLIGHT LINE DATA

FLIGHT NO. 94-152

DAEDALUS FLIGHT DATA
FLIGHT NUMBER: 94-152

Check Points	A c t u a l t i m e b e g i n	A c t u a l s c a n l i n e b e g i n	A l t i t u d e f e e t / m e t e r	Scan S p e e d (r p s)	t o t a l G o o d s c a n l i n e s	t o t a l I n t e r p o l a t e d s c a n l i n e s	t o t a l R e p e a t e d s c a n l i n e s
A-B	18:53:32.0 19:03: 5.0	18358 21922	65000/19812	6.25	3565	0	0
C-D	19:11:19.0 19:17:25.0	24991 27268	65000/19812	6.25	2278	0	0
E-F	19:21: 8.0 19:25:55.0	28654 30436	65000/19812	6.25	1783	0	0
G-H	19:39:11.0 19:46: 5.0	35386 37960	65000/19812	6.25	2575	0	0
I-J	20:03:51.0 20:09:10.0	44593 46573	65000/19812	6.25	1981	0	0
K-L	20:59:36.0 21:04: 6.0	65383 67066	65000/19812	6.25	1684	0	0
M-N	21:21: 6.0 21:25:36.0	73402 75085	65000/19812	6.25	1684	0	0
O-P	21:35:57.0 21:41: 0.0	78946 80827	65000/19812	6.25	1882	0	0
Q-R	21:49:14.0 21:55:20.0	83896 86173	65000/19812	6.25	2278	0	0
S-T	22:02:14.0 22:10:44.0	88747 91915	65000/19812	6.25	3169	0	0
U-V	22:13: 7.0 22:20:33.0	92806 95578	65000/19812	6.25	2773	0	0

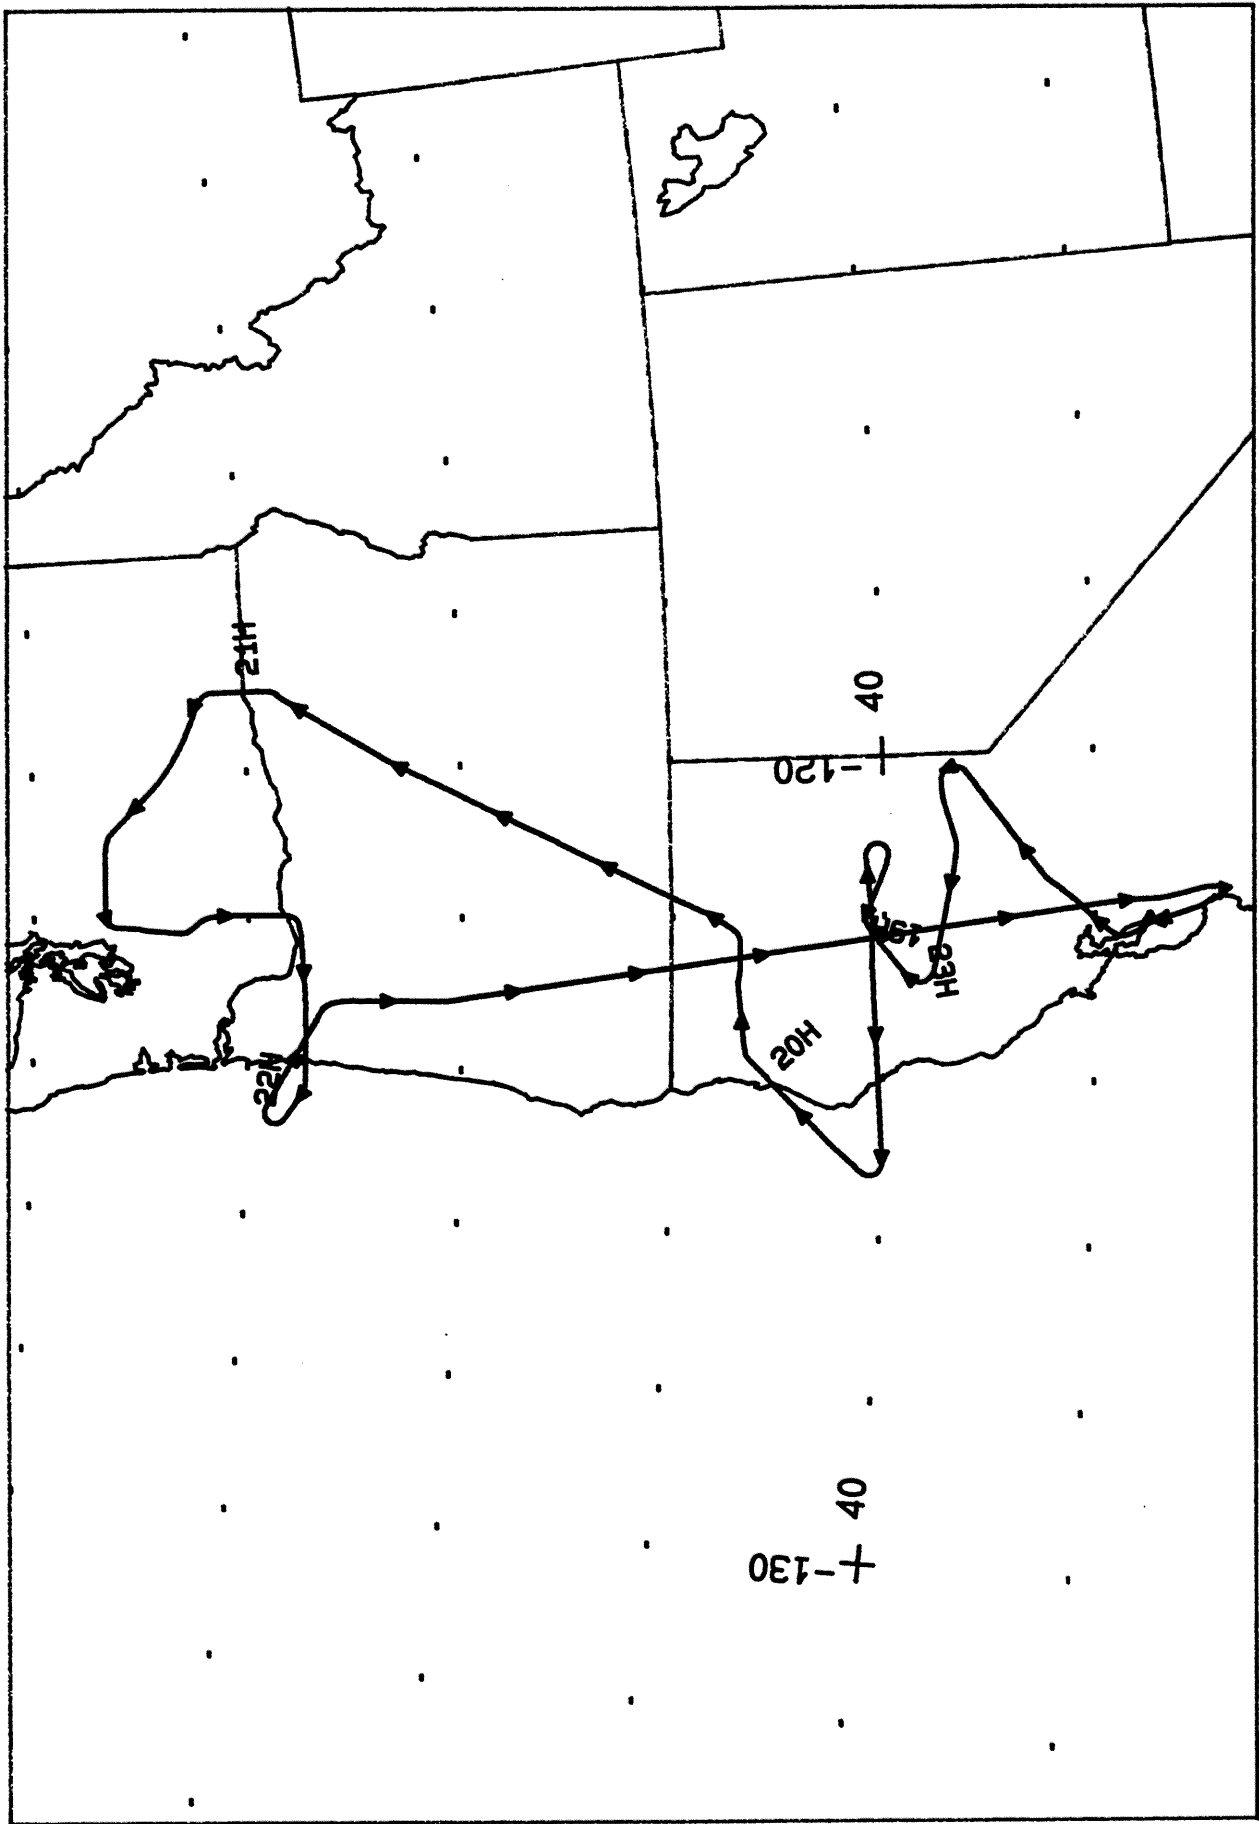

RC-10 / MAS / AVIRIS

A/C 706

22 SEPTEMBER 1994

FLIGHT 94-152



FLIGHT 94-152 22 SEPTEMBER 1994 A/C 706 MAS / AVIRIS MAS / AVIRIS ONC 6-18

