

# FLIGHT SUMMARY REPORT

**Flight Number:** 95-050  
**Calendar/Julian Date:** 21 January 1995 • 021  
**Sensor Package:** Wild Heerbrugg RC-10  
Dual Hycon HR-732  
Modis Airborne Simulator (MAS)  
Aerosol Particulate Sampler (APS)  
**Area(s) Covered:** Louisiana

**Investigator(s):** Pilot Proficiency

**Aircraft #:** 706

## SENSOR DATA

<b>Accession #:</b>	04860	04861	04862
<b>Sensor ID #:</b>	034	020	039
<b>Sensor Type:</b>	RC-10	HR-732	HR-732
<b>Focal Length:</b>	12" 304.66 mm	24" 609 mm	24" 609 mm
<b>Film Type:</b>	Aerochrome IR SO-060	Aerochrome IR SO-060	Aerochrome IR SO-060
<b>Filtration:</b>	Wratten 12	Wratten 12	Wratten 12
<b>Spectral Band:</b>	510-900 nm	510-900 nm	510-900 nm
<b>f Stop:</b>	8	11	11
<b>Shutter Speed:</b>	1/240	1/250	1/250
<b># of Frames:</b>	24	24	23
<b>% Overlap:</b>	60	60	60
<b>Quality:</b>	Excellent	Excellent	Excellent
<b>Remarks:</b>			

# SENSOR DATA continued

Flight Number: 95-050

<b>Accession #:</b>	-----	-----
<b>Sensor ID #:</b>	108	024
<b>Sensor Type:</b>	MAS	APS
<b>Focal Length:</b>	-----	-----
<b>Film Type:</b>	-----	-----
<b>Filtration:</b>	-----	-----
<b>Spectral Band:</b>	-----	-----
<b>f Stop:</b>	-----	-----
<b>Shutter Speed:</b>	-----	-----
<b># of Frames:</b>	-----	-----
<b>% Overlap:</b>	-----	-----
<b>Quality:</b>	-----	-----
<b>Remarks:</b>		

## Modis Airborne Simulator

The Modis Airborne Simulator (MAS) is a modified Daedalus multispectral scanner configured to replicate the capabilities of the Moderate-Resolution Imaging Spectrometer (MODIS), an instrument to be orbited on an EOS platform. MODIS is designed for the measurement of biological and physical processes and atmospheric temperature sounding. The Modis Airborne Simulator records fifty 12-bit channels of multispectral data and is configured as follows:

Spectral Channel	Band center (μm)	Bandwidth (μm)	Spectral Range
1	0.549	0.044	0.527-0.571
2	0.658	0.053	0.631-0.684
3	0.704	0.042	0.683-0.725
4	0.745	0.041	0.725-0.766
5	0.786	0.041	0.765-0.807
6	0.827	0.042	0.806-0.848
7	0.869	0.042	0.848-0.891
8	0.909	0.033	0.893-0.926
9	0.947	0.046	0.924-0.970
10	1.608	0.053	1.582-1.635
11	1.670	0.052	1.644-1.695
12	1.723	0.05	1.698-1.748
13	1.775	0.05	1.750-1.800
14	1.825	0.046	1.802-1.849
15	1.88	0.045	1.856-1.901
16	1.93	0.45	1.909-1.954
17	1.98	0.048	1.955-2.003
18	2.03	0.048	2.005-2.053
19	2.08	0.047	2.056-2.103
20	2.128	0.047	2.105-2.152
21	2.177	0.047	2.154-2.201
22	2.227	0.047	2.203-2.250
23	2.276	0.047	2.253-2.300
24	2.326	0.047	2.303-2.350
25	2.375	0.047	2.351-2.398

Spectral Channel	Band center (μm)	Bandwidth (μm)	Spectral Range
26	2.958	0.136	2.889-3.026
27	3.119	0.123	3.058-3.181
28	3.265	0.146	3.192-3.338
29	3.437	0.142	3.366-3.509
30	3.565	0.144	3.493-3.637
31	3.747	0.138	3.668-3.816
32	3.893	0.156	3.815-3.971
33	4.064	0.143	3.992-4.135
34	4.156	0.065	4.124-4.189
35	4.389	0.113	4.332-4.446
36	4.514	0.140	4.444-4.584
37	4.647	0.144	4.575-4.720
38	4.823	0.179	4.734-4.913
39	4.992	0.145	4.919-5.064
40	5.139	0.122	5.078-5.120
41	5.275	0.124	5.214-5.337
42	8.557	0.396	8.359-8.755
43	9.711	0.509	9.457-9.966
44	10.473	0.441	10.252-10.693
45	10.976	0.439	10.757-11.196
46	11.929	0.421	11.719-12.140
47	12.822	0.376	12.634-13.010
48	13.190	0.447	12.966-13.413
49	13.661	0.587	13.368-13.954
50	14.155	0.395	13.957-14.352

### Sensor/Aircraft Parameters:


Spectral Bands: 50 (digitized to 16-bit resolution)  
IFOV: 2.5 mrad  
Ground Resolution: 163 feet (50 meter at 65,000 feet)  
Swath Width: 22.9 mi/19.9 nmi (36 km)  
Total Scan Angle: 85.92°  
Pixels/Scan Line: 716  
Scan Rate: 6.25 scans/second  
Ground Speed: 400 kts (206 m/second)  
Roll Correction: Plus or minus 3.5 degrees (approx.)

The U.S. Geological Survey's EROS Data Center at Sioux Falls, South Dakota serves as the archive and product distribution facility for NASA-Ames aircraft acquired photographic and digital imagery. For information regarding photography and digital data (including areas of coverage, products, and product costs) contact EROS Data Center, Customer Services, Sioux Falls, South Dakota 57198 (Telephone: 605-594-6151)

Additional information regarding ER-2 acquired photographic and digital data is available through the Aircraft Data Facility at Ames Research Center. For specific information regarding flight documentation, sensor parameters, and areas of coverage contact the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: 415-604-6252).


**CAMERA FLIGHT LINE DATA  
FLIGHT NO. 95-050**

Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
Accession # 04860 Sensor # 034 A - C	0502-0525	16:27:48	16:38:31	64542/19672	10-80% cumulus (frames 0521-0525)
Accession # 04861 Sensor # 020 A - B	0001-0024	16:27:25	16:32:36	64500/19660	Clear
Accession # 04862 Sensor # 039 B - C	0001-0023	16:32:48	16:37:47	64583/19685	Light strike (frame 0001); 10-80% cumulus (frames 0015-0023)
APS ON/OFF TIMES		16:30:00/17:01:00			

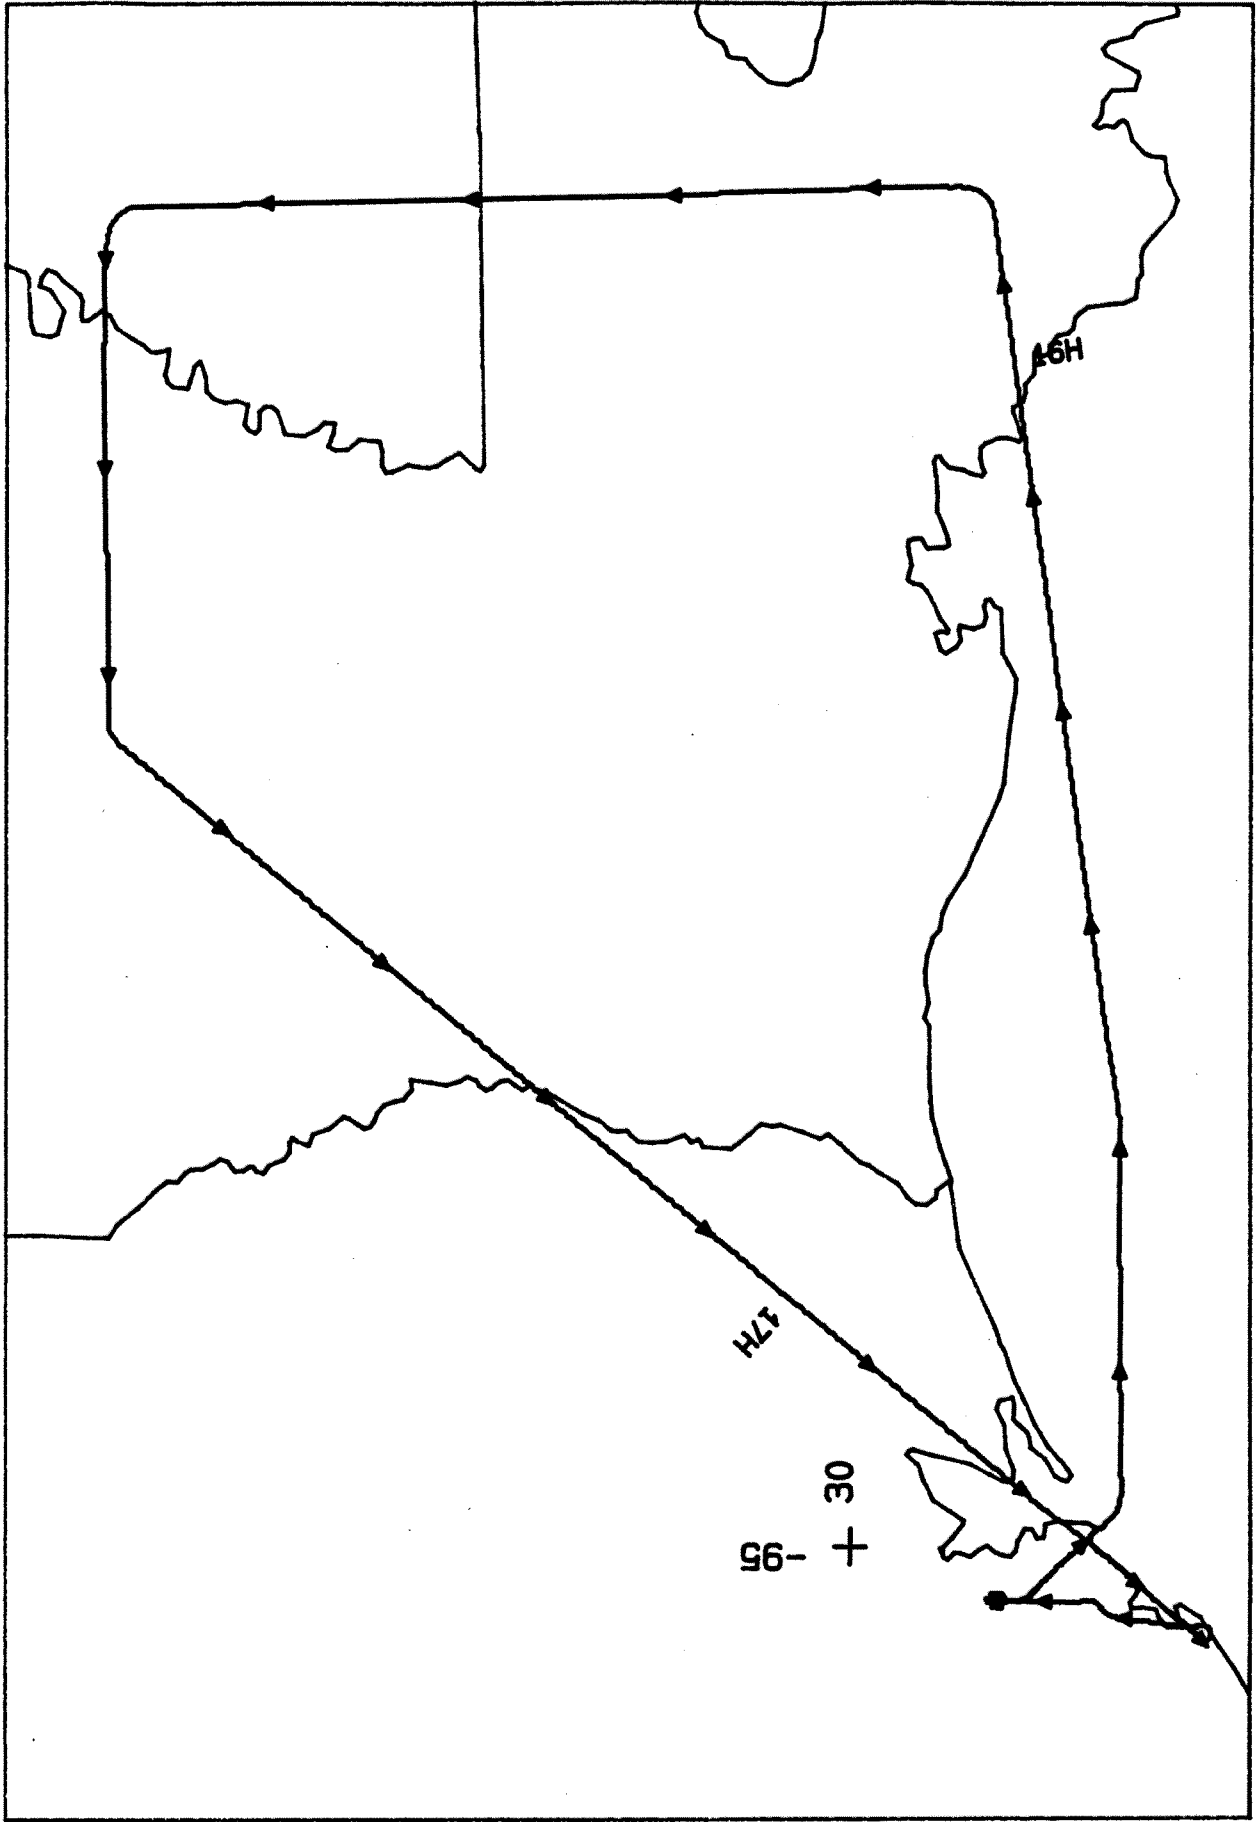

FLIGHT 85-050 21 JAN 1985 A/C 705 RC-10 / DUAL HR-732 / MAS



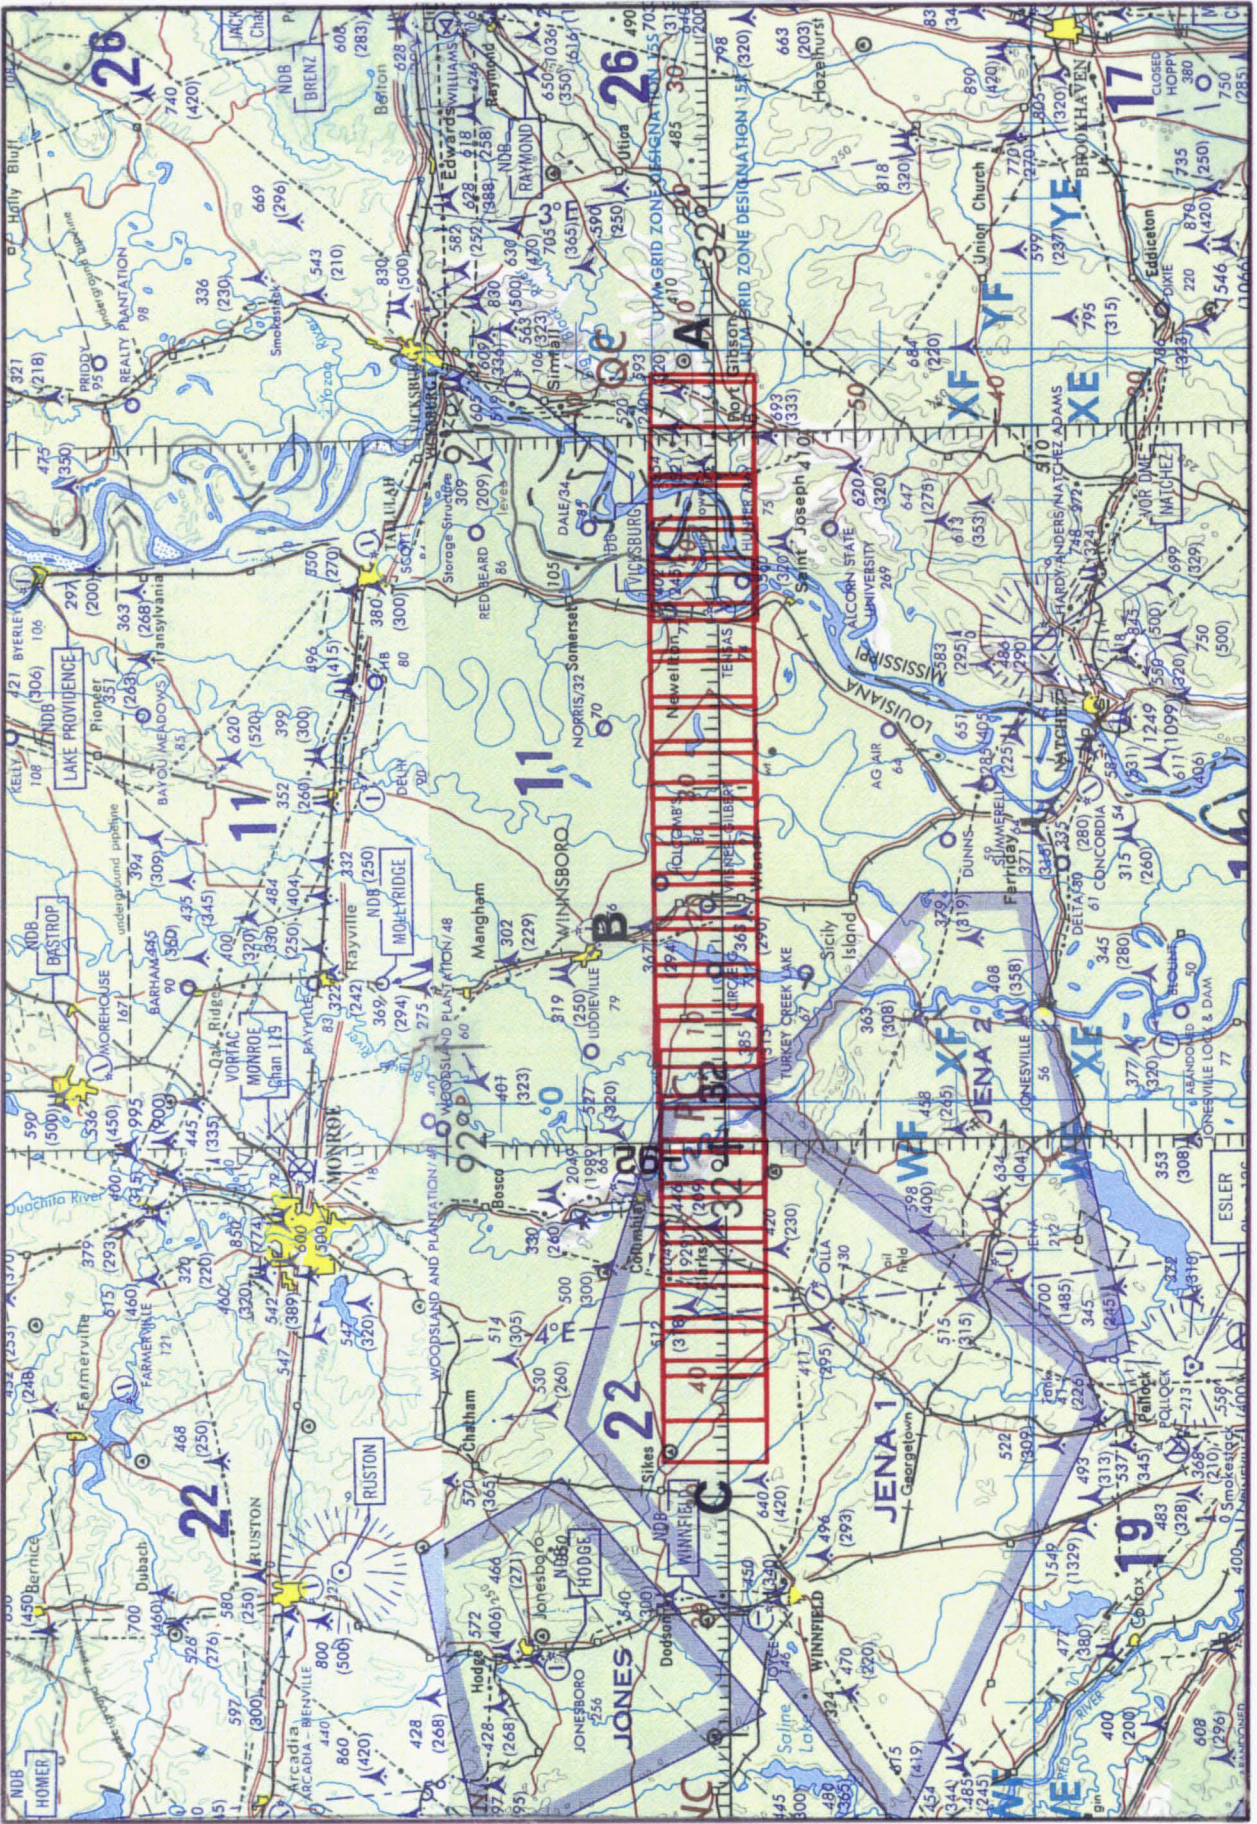

FLIGHT 95-050 21 JANUARY 1995 A/C 706 RC-10 / DUAL HR-792 ONC 6-20