

FLIGHT SUMMARY REPORT

Flight Number: 97-077
Calendar/Julian Date: 11 April 1997 • 101
Sensor Package: Wild-Heerbrugg RC-10
Multi-angle Imaging SpectroRadiometer
(MISR)
Area(s) Covered: Central California Coast/Moffett Field

Investigator(s): Conel, JPL

Aircraft #: 706

SENSOR DATA

Accession #:	05177	----
Sensor ID #:	076	120
Sensor Type:	RC-10	MISR
Focal Length:	12" 304.89 mm	----
Film Type:	Aerochrome MS-2448	----
Filtration:	HF-3	----
Spectral Band:	420-700 nm	----
f Stop:	11	----
Shutter Speed:	1/275	----
# of Frames:	89	----
% Overlap:	60	----
Quality:	Excellent	----
Remarks:	Substract 34 seconds for correct GMT	

Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and in situ data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor(s) and camera(s) used for data collection during this flight.

Airborne Multi-angle Imaging SpectroRadiometer

The Multi-angle Imaging SpectroRadiometer (MISR) is a new type of instrument, designed to view the Earth with cameras pointed in 9 different directions. As the instrument flies overhead, each piece of the Earth's surface below is successively imaged by the 9 cameras comprising the MISR system, in each of 4 wavelengths (blue, green, red, and near-infrared). The Airborne MISR (AirMISR) is currently flown aboard the ER-2 to facilitate the development and test the capabilities of the satellite MISR before it is launched in orbit in 1998.

In addition to improving our understanding of scattering of sunlight in the Earth environment, MISR data can also distinguish different types of clouds, particles and surfaces. Specifically, MISR will monitor the monthly, seasonal, and long-term trends in:

- The amount and type of atmospheric particles (aerosols), including those formed by natural sources and by human activities
- The amounts, types, and heights of clouds
- The distribution of land surface cover, including vegetation canopy structure

To accomplish its scientific objectives, the MISR instrument will measure the Earth's brightness in 4 spectral bands, at each of 9 look angles spread out in the forward and aft directions along the flight path. Spatial samples are acquired every 275 meters. Over a period of 7 minutes, a 360 km wide swath of Earth comes into view at all 9 angles. Special attention has been paid to providing highly accurate absolute and relative calibration, using on-board hardware consisting of deployable solar diffuser plates and several types of photodiodes. To complement the on-board calibration effort, a validation program of *in situ* measurements is planned, involving field instruments, one of which is the "PARABOLA III", which automatically scans the sky and ground at many angles. The aircraft camera, AirMISR will continue to operate on the ER-2 also as a complement to the orbiting MISR. Global coverage

with the satellite MISR will be acquired about once in 9 days at the equator; the nominal mission lifetime is 6 years.

MISR is being built for NASA by the Jet Propulsion Laboratory in Pasadena, California. MISR is one of five instruments scheduled to be launched into polar orbit aboard the first Earth Observing System spacecraft (EOS-AM1) in June 1998, as part of NASA's Mission to Planet Earth. The spacecraft will fly in a "sun-synchronous" orbit, designed so that it crosses the equator every 98 minutes, always at 10:30 a.m. local time, as the Earth rotates below.

Further information regarding MISR is available on the following web page: <http://www-misr.jpl.nasa.gov>

Camera Systems

Various camera systems and films are used for photographic data collection. Film types include high definition color infrared, natural color, and black and white emulsions. Available photographic systems are as follows:

- Wild-Heerbrugg RC-10 metric mapping camera
 - 9 x 9 inch film format
 - 6 inch focal length lens provides area coverage of 16 x 16 nautical miles from 65,000 feet
 - 12 inch focal length lens provides area coverage of 8 x 8 nautical miles from 65,000 feet

- Hycon HR-732 large scale mapping camera
 - 9 x 18 inch film format
 - 24 inch focal length lens provides area coverage of 4 x 8 nautical miles from 65,000 feet

- IRIS II Panoramic camera
 - 4.5 x 34.7 inch film format
 - 24 inch focal length lens
 - 90 degree field of view provides area coverage of 2 x 21.4 nautical miles from 65,000 feet

The U.S. Geological Survey's EROS Data Center at Sioux Falls, South Dakota serves as the archive and product distribution facility for NASA-Ames aircraft acquired photographic and digital imagery. For information regarding photography and digital data (including areas of coverage, products, and product costs) contact EROS Data Center, Customer Services, Sioux Falls, South Dakota 57198 (Telephone: 605-594-6151).


Information regarding ER-2 acquired photographic and digital data is available through the Aircraft Data Facility at Ames Research Center. For specific information regarding flight documentation, sensor parameters, and areas of coverage contact the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: 650-604-6252).

CAMERA FLIGHT LINE DATA
FLIGHT NO. 97-077

Accession # 05177

Sensor # 076

Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
A - B	6865-6891	18:56:33	19:08:48	69500/21184	10% cirrus (frames 6865-6868)
B - A	6892-6921	19:15:37	19:29:17	69887/21302	10% cirrus (frames 6920-6921)
A - B	6922-6953	19:37:21	19:51:35	70000/21336	10% cirrus (frames 6922-6925)

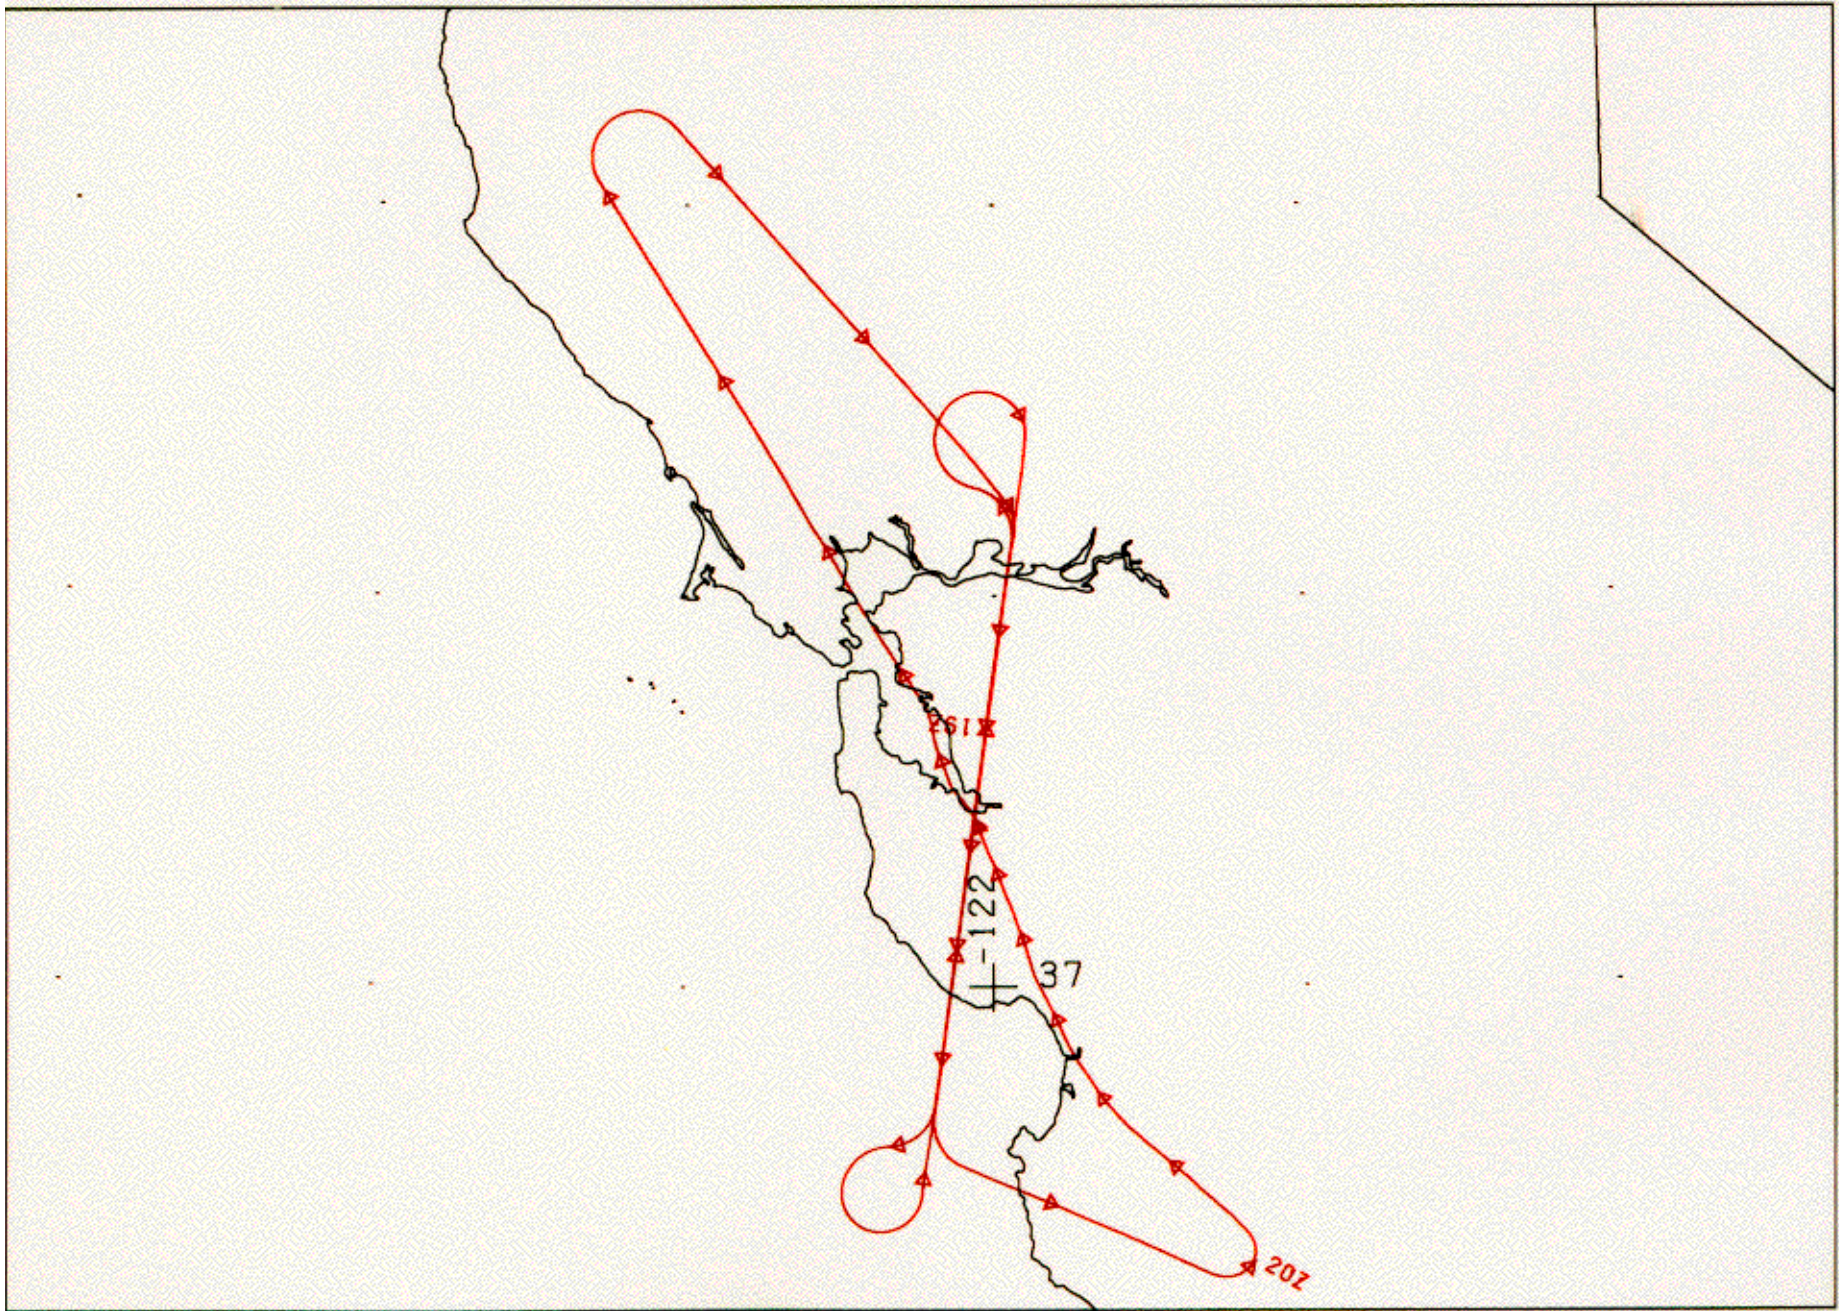


FLIGHT 97-077

11 APRIL 1997

A/C 706

RC-10 / MISR

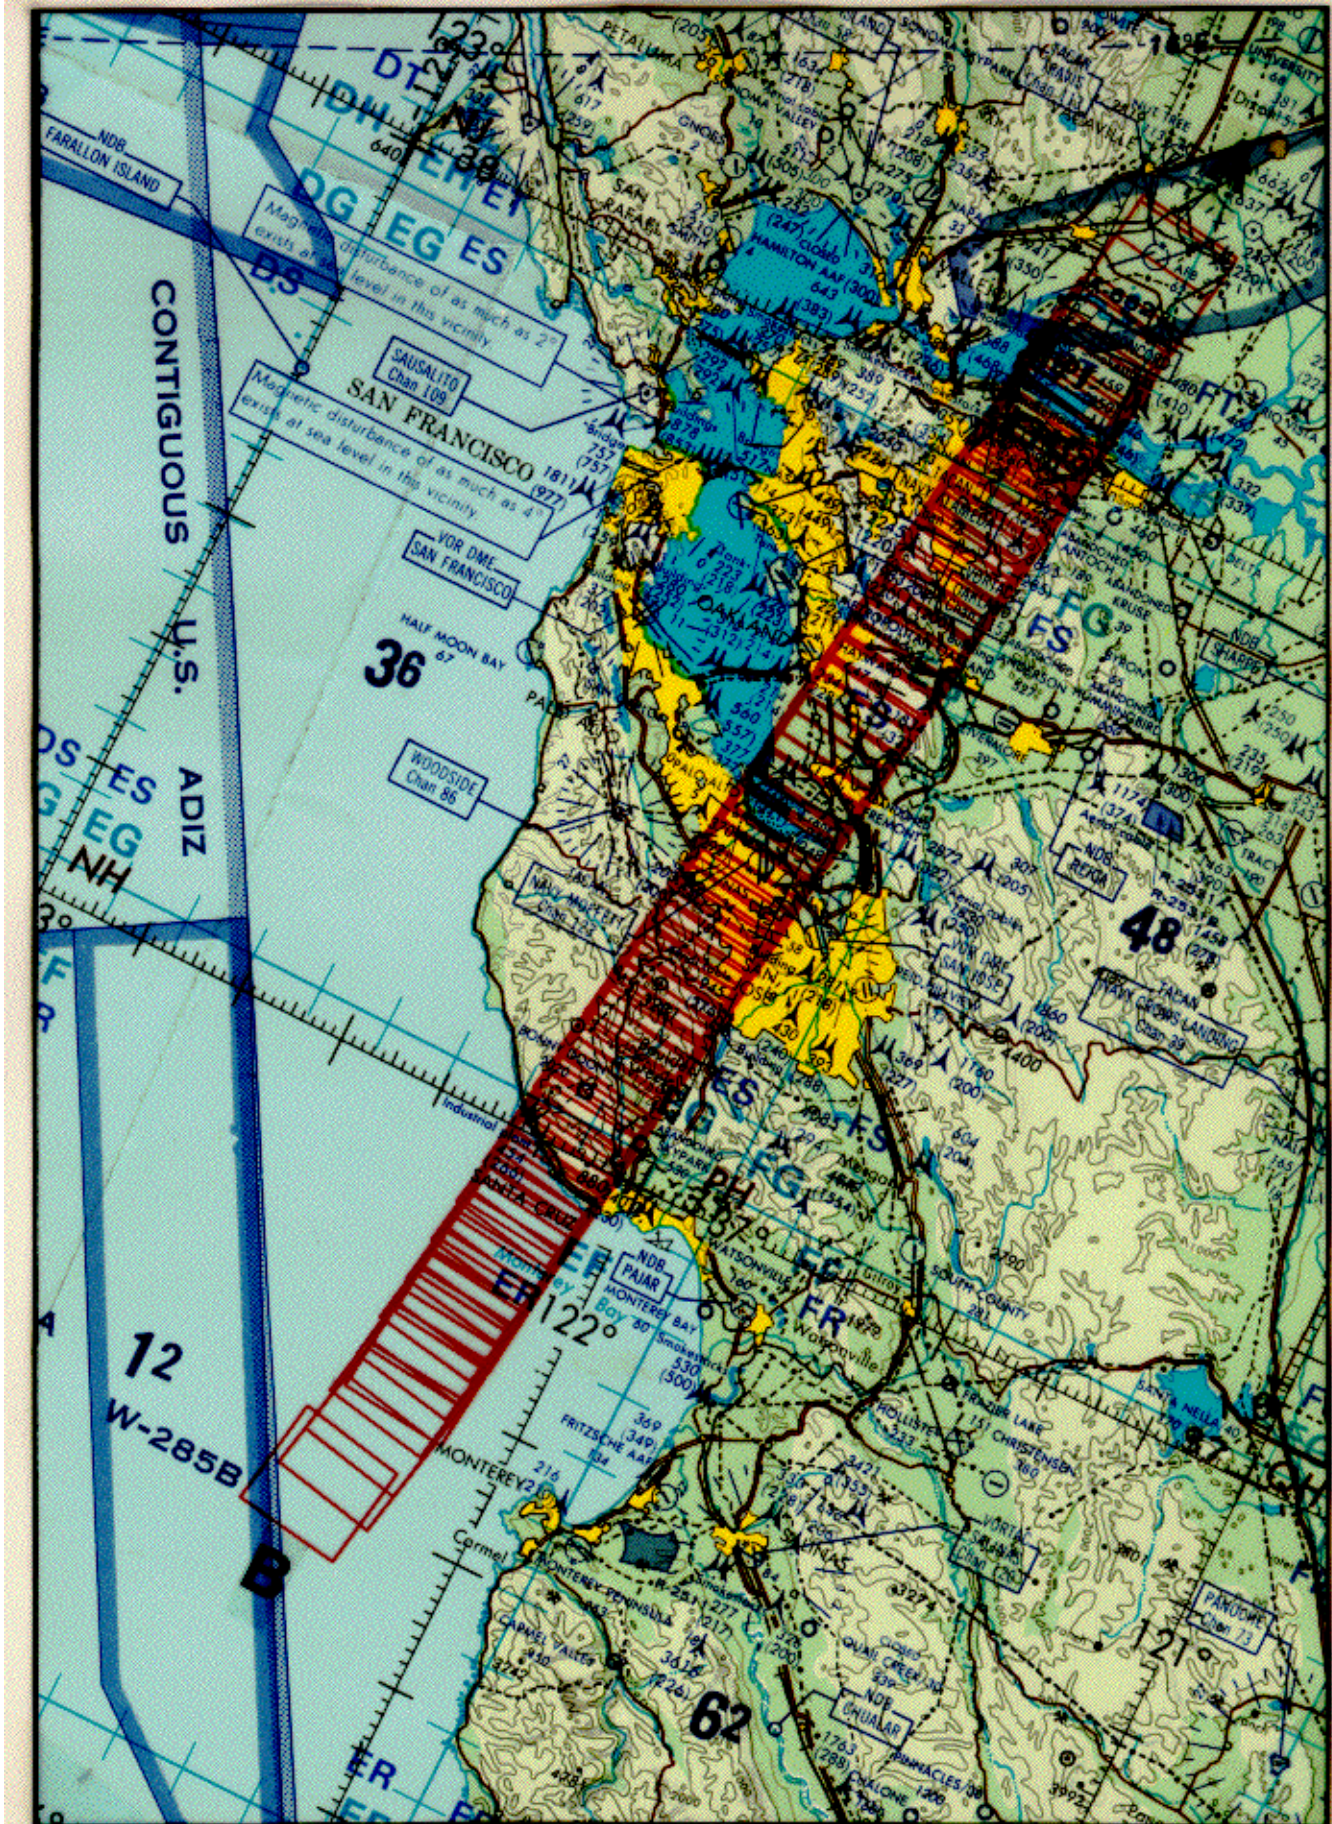

ONC 6-1B

RC-10

R/C 706

11 APRIL 1997

FLIGHT 97-077