

FLIGHT SUMMARY REPORT

Flight Number: 93-024
Calendar/Julian Date: 28 November 1992 • 333
Sensor Package: Wild-Heerbrug RC-10
Large Area Collectors (LACs)
Area(s) Covered: Gulf Coast

Investigator(s): Menzel, U. of Wisconsin;
Zolensky, NASA-JSC

Aircraft #: 708

SENSOR DATA

Accession #:	04514	-----
Sensor ID #:	031	100
Sensor Type:	RC-10	LACs
Focal Length:	6" 153.05 mm	-----
Film Type:	High Definition Aerochrome IR SO-131	-----
Filtration:	cc.20B	-----
Spectral Band:	510-900 nm	-----
f Stop:	4	-----
Shutter Speed:	1/125	-----
# of Frames:	123	-----
% Overlap:	60	-----
Quality:	Excellent	-----
Remarks:	16.6 sec. offset between camera and navigation data	

Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and *in situ* data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the camera system(s) used for data collection during this flight.

Large Area Collectors

The Large Area Collectors (LACs) are flown on NASA high altitude ER-2s in support of the NASA-Johnson Space Center Cosmic Dust Program. The LACs are used to collect comparatively unaltered cosmic dust from the stratosphere at ER-2 flight altitudes of 65,000 feet or higher. Sufficient quantities of extraterrestrial materials are collected to allow chemical and mineralogical compositions of individual particles to be determined. Study of these materials whose sources may be comets, asteroid collisions, planetary impacts, and meteorite ablation provide valuable information about the origin and history of the solar system.

Additional information regarding the Large Area Collectors may be obtained from Michael E. Zolensky, NASA-Johnson Space Center, SN2, Houston, Texas 77058 (Telephone (713) 483-5128).

Camera Systems

Various camera systems and films are used for photographic data collection. Film types include high definition color infrared, natural color, and black and white emulsions. Available photographic systems are as follows:

- Wild-Heerbrug RC-10 metric mapping camera
 - 9 x 9 inch film format
 - 6 inch focal length lens provides area coverage of 16 x 16 nautical miles from 65,000 feet
 - 12 inch focal length lens provides area coverage of 8 x 8 nautical miles from 65,000 feet
- Hycon HR-732 large scale mapping camera
 - 9 x 18 inch film format
 - 24 inch focal length lens provides area coverage of 4 x 8 nautical miles from 65,000 feet

- IRIS II Panoramic camera
 - 4.5 x 34.7 inch film format
 - 24 inch focal length lens
 - 90 degree field of view provides area coverage of 2 x 21.4 nautical miles from 65,000 feet

The U.S. Geological Survey's EROS Data Center at Sioux Falls, South Dakota serves as the archive and product distribution facility for NASA-Ames aircraft acquired photographic and digital imagery. For information regarding photography and digital data (including areas of coverage, products, and product costs) contact EROS Data Center, Customer Services, Sioux Falls, South Dakota 57198 (Telephone: (605) 594-6151).


Additional information regarding ER-2 acquired photographic and digital data is available through the Aircraft Data Facility at Ames Research Center. For specific information regarding flight documentation, sensor parameters, and areas of coverage contact the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: (415) 604-6252).

**CAMERA FLIGHT LINE DATA
FLIGHT NO. 93-024**

Accession # 04514

Sensor # 031

Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
A - B	5154-5170	14:30:09	14:45:20	65000/19800	30-90% cumulus (frames 5155-5170); emulsion damage (frames 5156-5158)
C - D	5171-5193	14:50:17	15:11:06	"	10-80 scattered cumulus
A - B	5194-5211	15:22:23	15:38:20	"	30-80 scattered cumulus
C - D	5212-5235	15:44:07	16:05:40	"	10-60 scattered cumulus
A - B	5236-5253	16:14:19	16:30:12	"	20-70 scattered cumulus
C - D	5254-5276	16:34:55	16:55:29	"	10-60 scattered cumulus (frames 5254-5271); 10% scattered cumulus (frames 5275-5276)

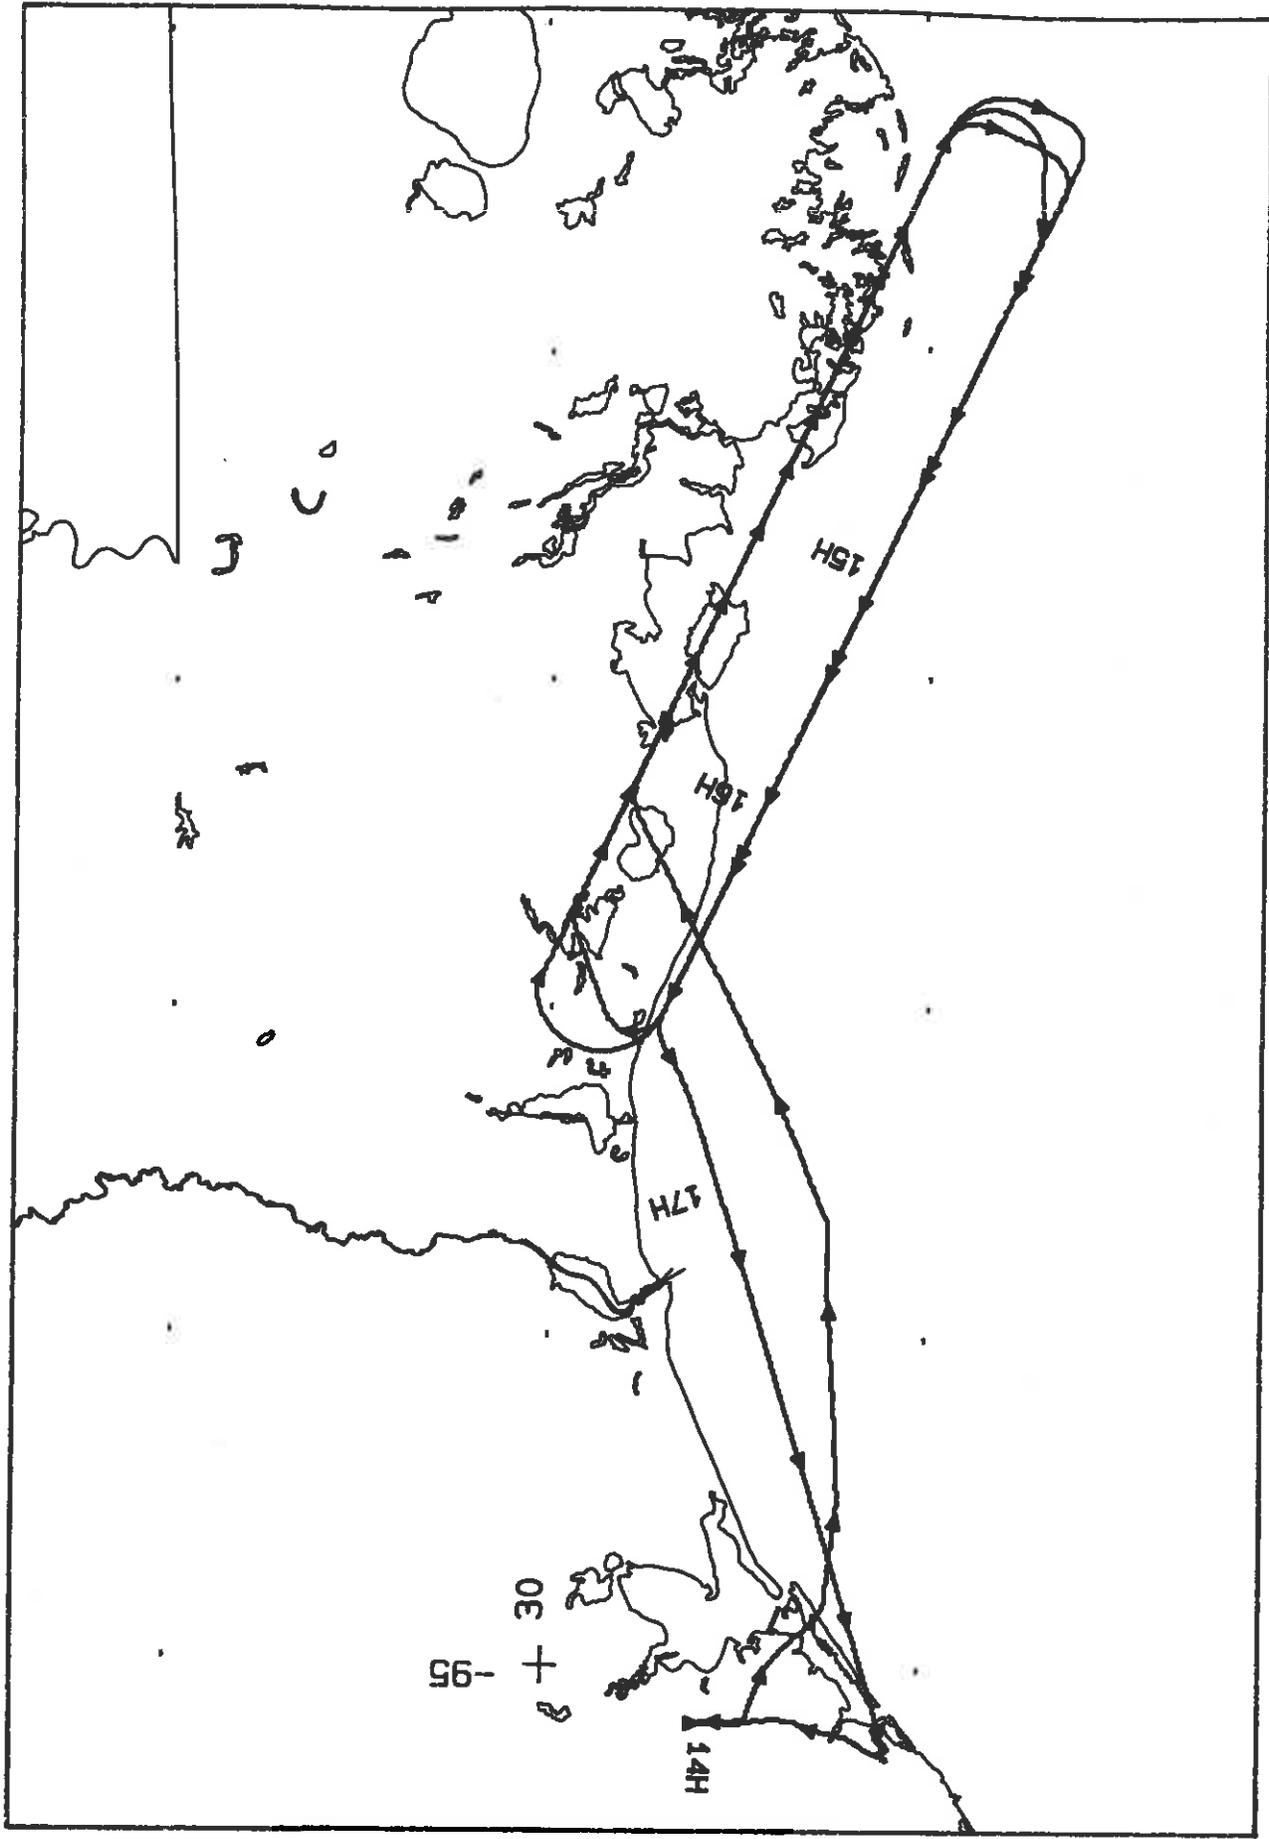

RC-10

A/C 708

28 NOVEMBER 1992

FLIGHT 93-024

