

# FLIGHT SUMMARY REPORT

**Flight #:** 90-102  
**Date:** 26 June 1990  
**Sensor Package:** IRIS II Panoramic Camera  
**Area(s) Covered:** Virginia, West Virginia, and Maryland

**Investigator(s):** Functional Check Flight  
**Flight Request:** 90X001

**Aircraft #:** 709  
**Julian Date:** 177

## SENSOR DATA

**Accession #:** 04041  
**Sensor ID #:** 070  
**Sensor Type:** IRIS  
**Focal Length:** 24"  
609.6 mm  
**Film Type:** High Definition  
Aerochrome IR  
SO-131  
**Filtration:** cc.20B  
**Spectral Band:** 510-900 nm  
**f Stop:** 3.5  
**Shutter Speed:** 1/175  
**# of Frames:** 138  
**% Overlap:** 60  
**Quality:** Excellent  
**Remarks:**

## Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and *in situ* data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments.

### Camera Systems

Various camera systems and films are used for photographic data collection. Film types include high definition color infrared, natural color, and black and white emulsions. Available photographic systems are as follows:


- Wild-Heerbrug RC-10 metric mapping camera
  - 9 x 9 inch film format
  - 6 inch focal length lens provides area coverage of 16 x 16 nautical miles from 65,000 feet
  - 12 inch focal length lens provides area coverage of 8 x 8 nautical miles from 65,000 feet
- Hycon HR-732 large scale mapping camera
  - 9 x 18 inch film format
  - 24 inch focal length lens provides area coverage of 4 x 8 nautical miles from 65,000 feet
- IRIS II Panoramic camera
  - 4.5 x 34.7 inch film format
  - 24 inch focal length lens
  - 90 degree field of view provides area coverage of 2 x 21.4 nautical miles from 65,000 feet

**CAMERA FLIGHT LINE DATA  
FLIGHT NO. 90-102**


Accession # 04041

Sensor # 070

Check Points	Frame Numbers	Time (GMT-hr, min, sec)		Altitude, MSL feet/meters	Cloud Cover/Remarks
		START	END		
A - B	0004-0141	14:40:50	14:56:48	65000/19800	10% minor cumulus (frames 0038-0054, 0058-0068, 0076-0080, 0102-0103, 0114-0123)

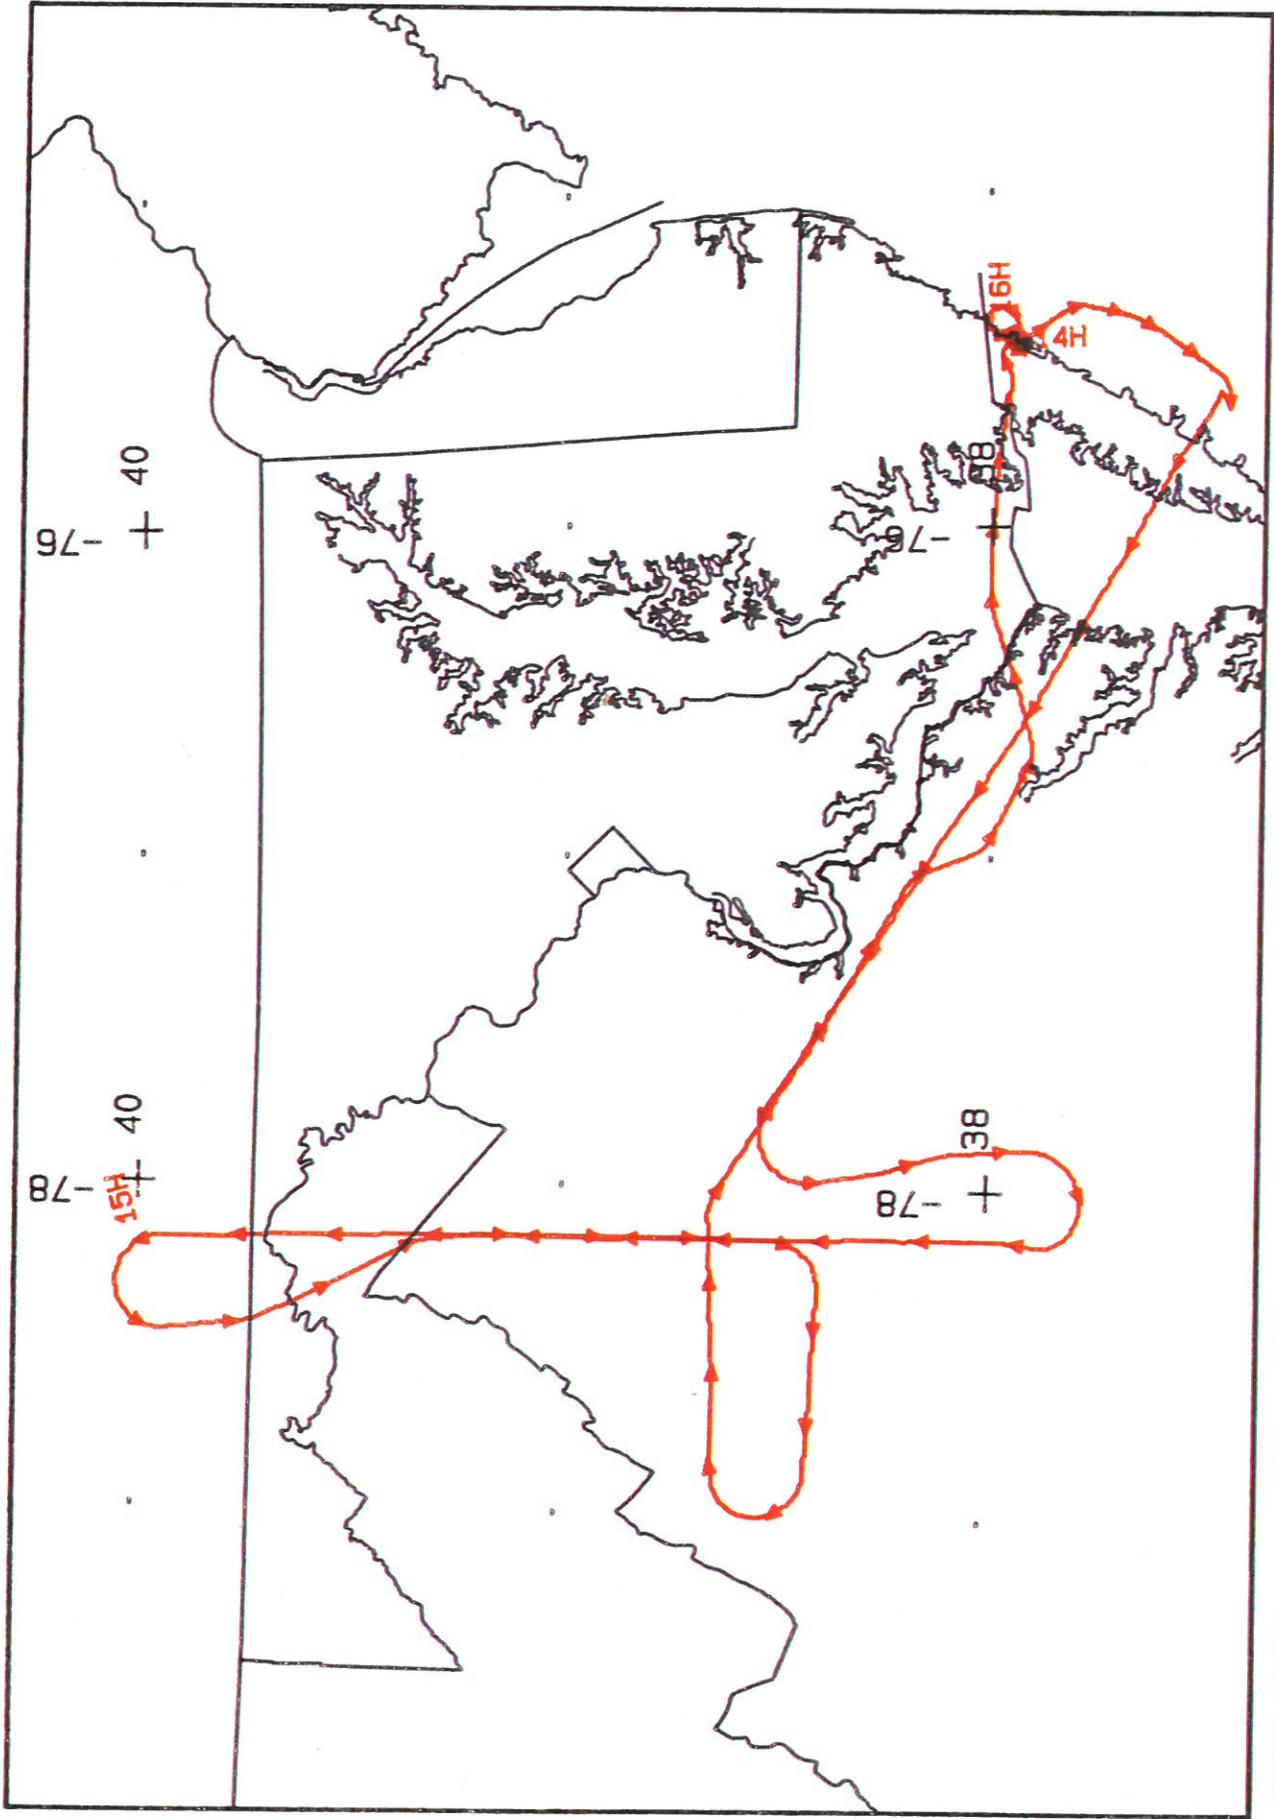

FLIGHT 90-102      26 June 1990      A/C 709      Itek IRIS II Panoramic Camera

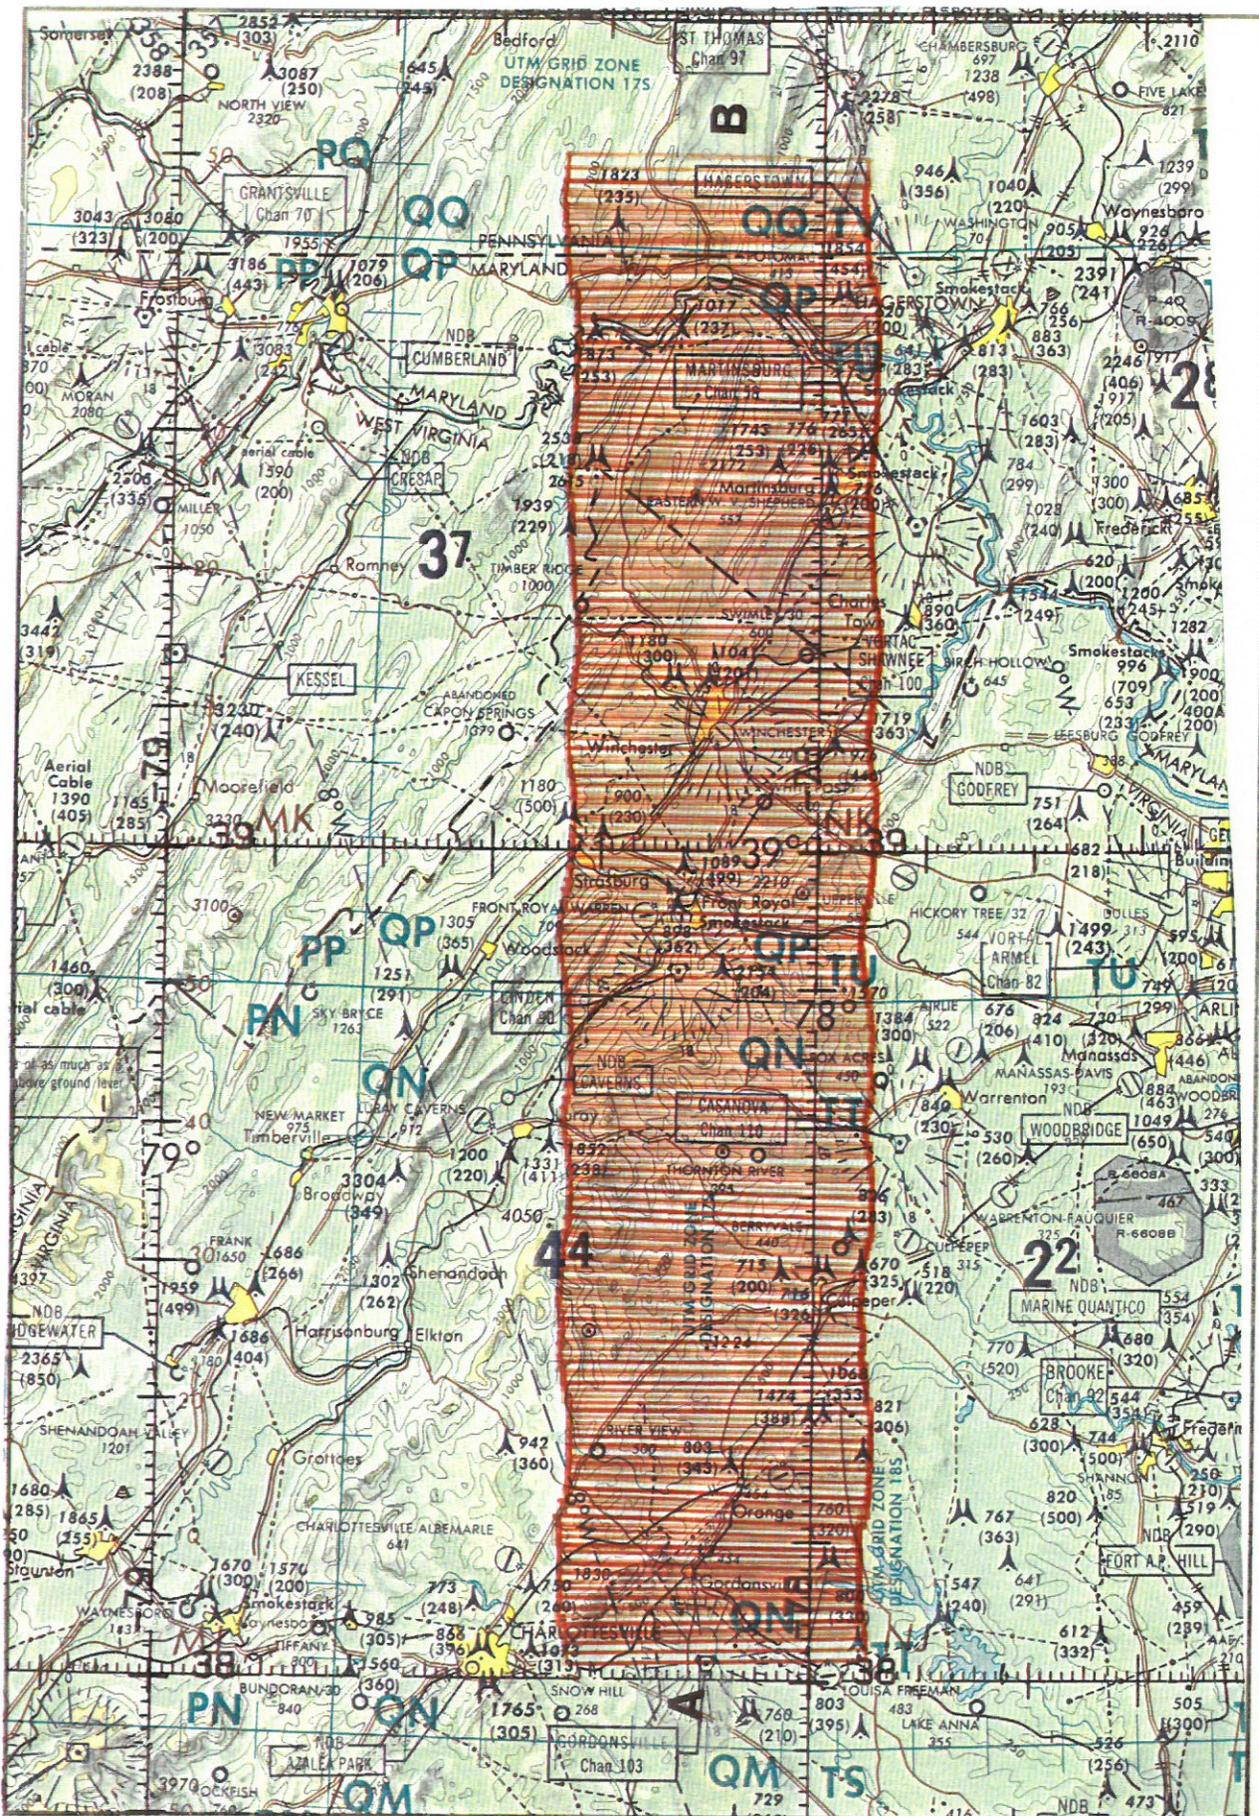

FLIGHT 90-102  
 26 June 1990  
 A/C 709  
 IRIS Panoramic Camera  
 Accession # 04041  
 ONC 6-21