### FLIGHT SUMMARY REPORT

Flight Number:

94-035

Calendar/Julian Date: 01 February 1994 • 32

Sensor Package:

Wild-Heerbrug RC-10 Modis Airborne Simulator (MAS) Large Area Collectors (LACs)

Area(s) Covered:

Remarks:

Lower Mississippi Valley

Investigator(s): U.S. Fish and Wildlife Service, Environmental Protection Agency

Aircraft #: 706

### SENSOR DATA

Accession #:	04690		
Sensor ID #:	076	108	100
Sensor Type:	RC-10	MAS	LACs
Focal Length:	12" 304.89 mm		
Film Type:	Aerochrome IR SO-060		
Filtration:	Wratten 12		
Spectral Band:	510-900 nm		
f Stop:	11		
Shutter Speed:	1/250		
# of Frames:	367		
% Overlap:	60		
Quality:	Excellent	Excellent	

### Airborne Science and Applications Program

The Airborne Science and Applications Program (ASAP) is supported by three ER-2 high altitude Earth Resources Survey aircraft. These aircraft are operated by the High Altitude Missions Branch at NASA-Ames Research Center, Moffett Field, California. The ER-2s are used as readily deployable high altitude sensor platforms to collect remote sensing and *in situ* data on earth resources, celestial phenomena, atmospheric dynamics, and oceanic processes. Additionally, these aircraft are used for electronic sensor research and development and satellite investigative support.

The ER-2s are flown from various deployment sites in support of scientific research sponsored by NASA and other federal, state, university, and industry investigators. Data are collected from deployment sites in Kansas, Texas, Virginia, Florida, and Alaska. Cooperative international scientific projects have deployed the aircraft to sites in Great Britain, Australia, Chile, and Norway.

Photographic and digital imaging sensors are flown aboard the ER-2s in support of research objectives defined by the sponsoring investigators. High resolution mapping cameras and digital multispectral imaging sensors are utilized in a variety of configurations in the ER-2s' four pressurized experiment compartments. The following provides a description of the digital multispectral sensor(s) and camera(s) used for data collection during this flight.

### Aerosol Particulate Sampler

The Aerosol Particulate Sampler (APS) has been developed and is operated by Dr. Guy Ferry of the NASA-Ames Research Experiments Branch. The sampler is a non-imaging sensor designed to gather high altitude dust particles for laboratory research.

### Large Area Collectors

The Large Area Collectors (LACs) are flown on NASA high altitude ER-2s in support of the NASA-Johnson Space Center Cosmic Dust Program. The LACs are used to collect comparatively unaltered cosmic dust from the stratosphere at ER-2 flight altitudes of 65,000 feet or higher. Sufficient quantities of extraterrestrial materials are collected to allow chemical and mineralogical compositions of individual particles to be determined. Study of these materials whose sources may be comets, asteroid collisions, planetary impacts, and meteorite ablation provide valuable information about the origin and history of the solar system.

Additional information regarding the Large Area Collectors may be obtained from Michael E. Zolensky, NASA-Johnson Space Center, SN2, Houston, Texas 77058 (Telephone: 713-483-5128).

### Camera Systems

Various camera systems and films are used for photographic data collection. Film types include high definition color infrared, natural color, and black and white emulsions. Available photographic systems are as follows:

- Wild-Heerbrug RC-10 metric mapping camera
  - 9 x 9 inch film format
  - 6 inch focal length lens provides area coverage of 16 x 16 nautical miles

from 65,000 feet

- 12 inch focal length lens provides area coverage of 8 x 8 nautical miles from 65,000 feet
- Hycon HR-732 large scale mapping camera

- 9 x 18 inch film format

- 24 inch focal length lens provides area coverage of 4 x 8 nautical miles from 65,000 feet
- IRIS II Panoramic camera

- 4.5 x 34.7 inch film format

- 24 inch focal length lens

- 90 degree field of view provides area coverage of 2 x 21.4 nautical miles from 65,000 feet

The U.S. Geological Survey's EROS Data Center at Sioux Falls, South Dakota serves as the archive and product distribution facility for NASA-Ames aircraft acquired photographic and digital imagery. For information regarding photography and digital data (including areas of coverage, products, and product costs) contact EROS Data Center, Customer Services, Sioux Falls, South Dakota 57198 (Telephone: 605-594-6151).

For specific information regarding flight documentation, sensor parameters, and areas of coverage contact the Aircraft Data Facility, NASA-Ames Research Center, Mail Stop 240-6, Moffett Field, California 94035-1000 (Telephone: 415-604-6252). Additional information regarding ER-2 acquired photographic and digital data is also available through the Aircraft Data Facility.

# CAMERA FLIGHT LINE DATA FLIGHT NO. 94-035

04690 Accession #

920 Sensor #

Check	Frame	Time (GMT-hr,	nr, min, sec)	Altitude, MSL	!
Points	Numbers	START	END	feet/meters	Cloud Cover/Remarks
A - B	1340-1386	16:37:56	16:59:36	65000/19800	Minor-10% cumulus (frames 1361-1363)
Q-D	1387-1426	17:03:28	17:21:47	=	Minor-10% cumulus (frames 1399-1402)
<u>н</u>	1427-1467	17:30:58	17:49:40	=	Minor-10% cumulus (frames 1427-1429, 1445-1454)
H-5	1468-1520	17:53:08	18:17:26	-	Minor-10% cumulus (frames 1478-1481, 1490-1493, 1506-1507, 1510-1513, and 1519-1520)
۲- ا	1521-1567	18:23:57	18:45:25	=	Minor cumulus (frames 1533-1534); minor- 10% cumulus (frames 1539-1547)
K - L	1568-1619	18:57:15	19:21:00	=	Minor-10% cumulus (frames 1587-1595); emulsion abrasion (frame 1615)
Z ¥	1620-1664	19:25:57	19:46:27	=	Minor-10% cumulus (frames 1643-1646, 1648); 10-20% cumulus (frames 1649- 1664)

Page 1/2

# CAMERA FLIGHT LINE DATA FLIGHT NO. 94-035

04690 Accession #

Sensor #

920


Page 2/2

Check	Frame	Time (GMT-hr	r, min, sec)	Altitude, MSL	
Points	Numbers	START	END	feet/meters	Cloud Cover/Remarks
O - P	1665-1706	19:55:54	20:14:58	65000/19800	Minor cumulus (frames 1665 and 1688); 10- 40% cumulus (frames 1666-1687)
		·			
		and the second s			

### MAS SCANNER FLIGHT LINE DATA FLIGHT NO. 94-035

DATA	1-035
_	-
H	σ
	•
(7	0
16	ū
	α
Ŀ	Σ
US FL 1	Z
EDALL	۲
=	=
0	٠
ш	-
DA	_
_	u

Check Points	Actual time (GMT) begin end	Actua scanline begin en	ual Ifne end	Altitude feet/meter	Scan Speed (rps)	total Good scanlines	total Interpolated scanlines	total Repeated scanlines
A-B	16:37:78.8 16:59:74.8	1692	1,8126	65888/19812	6.25	8435	Ø	Ø
C-D	17:03:73.0 17:21:71.0	11611	18442	65000/19812	6.25	6832	Ø	Ø
H F	17:38:71.8 17:49:75.8	21808	28738	65888/19812	6.25	6931	Ø	Ø
H-0	17:53:77.8 18:17:78.8	3Ø124	39232	65888/19812	6.25	9109	Ø	B
I-J	18:23:76.Ø 18:45:75.Ø	41509	49528	65888/19812	6.25	8 8 1 9	und	8
K-L	18:56:73.8 19:28:72.8	53686	62893	65000/19812	6.25	9208	Ø	Ø
Σ	19:25:78.Ø 19:46:74.Ø	64675	72496	65888/19812	6.25	7821	•	Ø
0-P	19:54:72.8 28:14:76.8	75466	83Ø89	65000/19812	6.25	7624	80	Ø

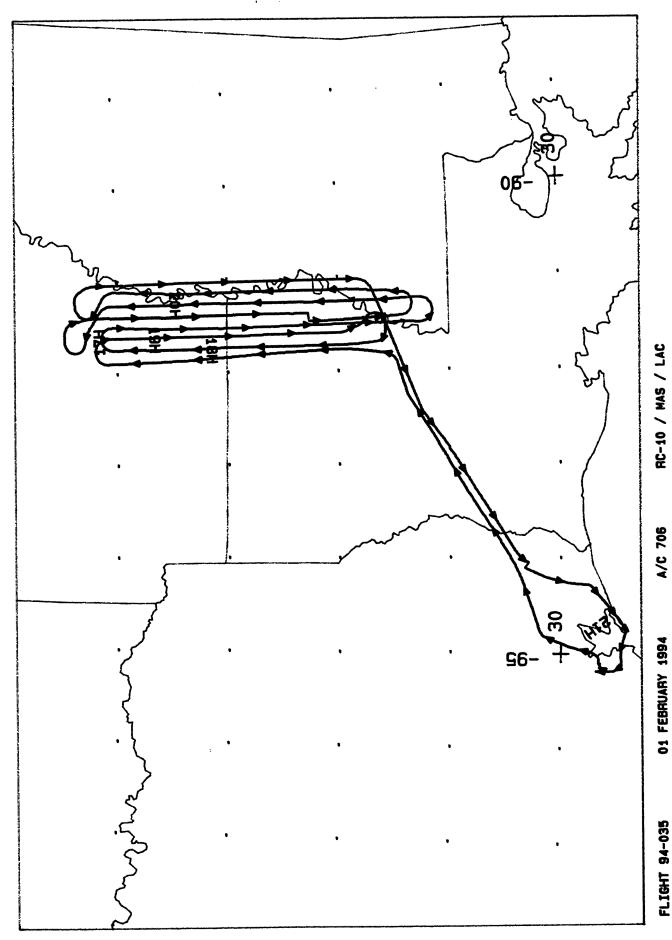

A/C 706

01 FEBRUARY 1994

FLIGHT 94-035